



# 60.04515 Mini Pro Recessed Downlight



IP20

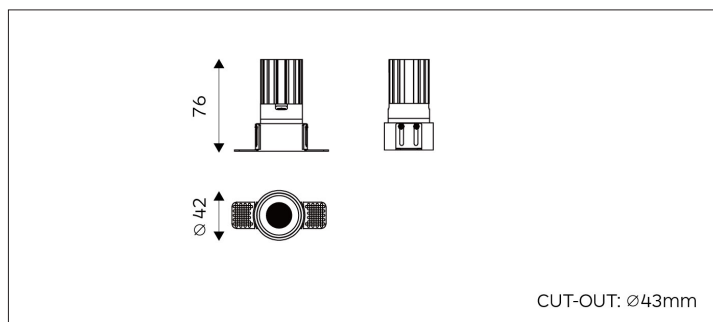

| Light Distribution             | Mini Pro Recessed Downlight |
|--------------------------------|-----------------------------|
| Colour Temperature             | 2700/3000/3500/4000K        |
| Colour Rendition Index         | CRI 90                      |
| Optics                         | Lens                        |
| Beam Angle                     | 17D/22D/32D/45D             |
| Cut Out                        | 43mm                        |
| Connected Load                 | 8W                          |
| Luminous Flux Of The Luminaire | 608lm                       |
| Luminaire Efficacy             | 76m/W                       |
| Colour Deviation               | SDCM < 5                    |
| Light Source                   | LED                         |
| LED Type                       | COB                         |
| Dimming Method                 | Triac/0-10V/ Dali           |
| Cover Material                 | Aluminum                    |
| Body Material                  | Aluminum                    |
| IP Rating                      | IP20                        |
| Housing Colour                 | Matt White/ Matt Black      |
| Weight                         | 0.2Kg                       |
| Technical Region               | 220-240V 50/60Hz            |

Light Beam Table

| H(m) | E(lx)   | D(m) |
|------|---------|------|
|      |         | 22°  |
| 1.0  | 3322.93 | 0.39 |
| 2.0  | 830.73  | 0.77 |
| 3.0  | 369.21  | 1.16 |
| 4.0  | 207.68  | 1.54 |
| 5.0  | 132.92  | 1.93 |

Mainly for spaces with restricted floor heights, such as clothing shops, furniture shops and other brand boutiques, car displays, jewelry, star hotels, high-end clubs, museums, chain stores, brand sales halls, professional windows, counters and other accent lighting places.