



# 52.05526 Mini Pro Recessed Downlight

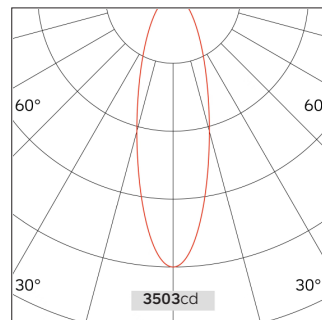

IP20

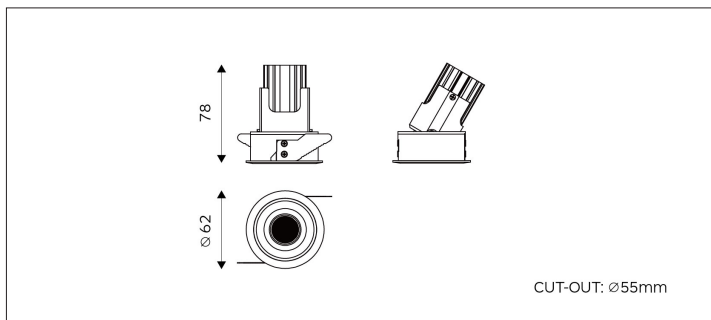

Light Distribution	Mini Pro Recessed Downlight
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	Lens
Beam Angle	17D/23D/34D/55D
Cut Out	55mm
Connected Load	8W
Luminous Flux Of The Luminaire	684lm
Luminaire Efficacy	85.5lm/W
Colour Deviation	SDCM < 5
Light Source	LED
LED Type	COB
Dimming Method	Triac/0-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Matt White/ Matt Black
Weight	0.5Kg
Technical Region	220-240V 50/60Hz

Light Beam Table

H(m)	E(lx)	D(m)
		23°
1.0	3503.07	0.40
2.0	875.77	0.80
3.0	389.23	1.20
4.0	218.94	1.60
5.0	140.12	2.00

Mainly for spaces with restricted floor heights, such as clothing shops, furniture shops and other brand boutiques, car displays, jewelry, star hotels, high-end clubs, museums, chain stores, brand sales halls, professional windows, counters and other accent lighting places.