



57.03511 NOORLY Recessed Downlight

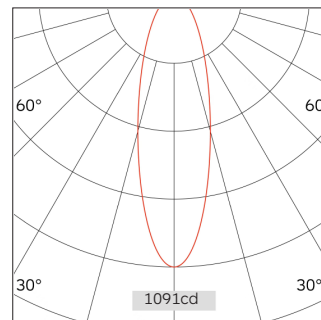

IP20

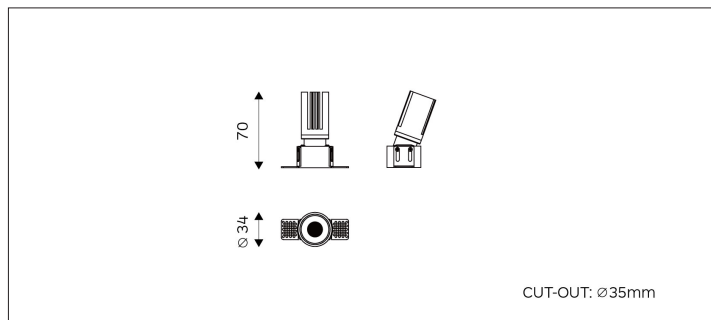

Light Distribution	NOORLY Recessed Downlight
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	Lens
Beam Angle	20D/26D/29D/54D
Cut Out	35mm
Connected Load	6W
Luminous Flux Of The Luminaire	288lm
Luminaire Efficacy	48lm/W
Colour Deviation	SDCM < 5
Light Source	LED
LED Type	COB
Dimming Method	Triac/0-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Sandy White/ Sandy Black
Weight	0.2Kg
Technical Region	220-240V 50/60Hz

Light Beam Table

H(m)	E(lx)	D(m)
		26°
1.0	1091.02	0.47
2.0	272.26	0.95
3.0	121.22	1.42
4.0	68.19	1.90
5.0	43.64	2.37

Mainly for spaces with restricted floor heights, such as clothing shops, furniture shops and other brand boutiques, car displays, jewelry, star hotels, high-end clubs, museums, chain stores, brand sales halls, professional windows, counters and other accent lighting places.