



52.07012 Vero Recessed Downlight

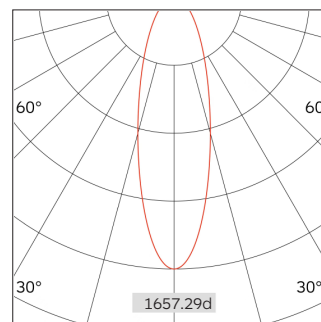

IP20

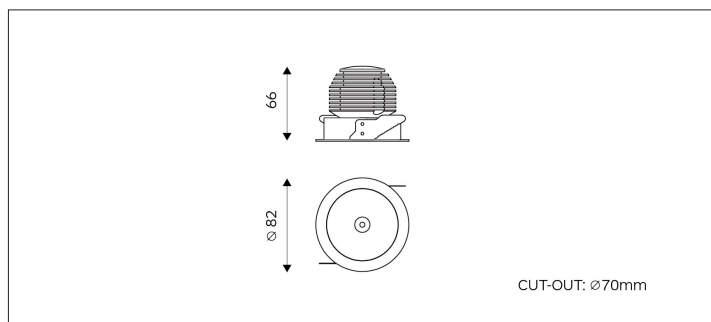

Light Distribution	52.07012 Vero Recessed Downlight
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	Lens
Beam Angle	27D/44D
Cut Out	70mm
Connected Load	8W
Luminous Flux Of The Luminaire	446lm
Luminaire Efficacy	55.7lm/W
Colour Deviation	SDCM<5
Light Source	LED
LED Type	COB
Dimming Method	Triac/0-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Matt White/ Matt Black
Weight	0.8Kg
Technical Region	220-240V 50/60Hz

Light Beam Table

h(m)	E(lx)	D(m)
		27°
1.0	1657.29	0.48
2.0	414.32	0.95
3.0	184.14	1.43
4.0	103.58	1.90
5.0	66.29	2.38

Mainly for spaces with restricted floor heights, such as clothing shops, furniture shops and other brand boutiques, car displays, jewelry, star hotels,

high-end clubs, museums, chain stores, brand sales halls, professional windows, counters and other accent lighting places.