




56.03518 FOS Recessed Downlight

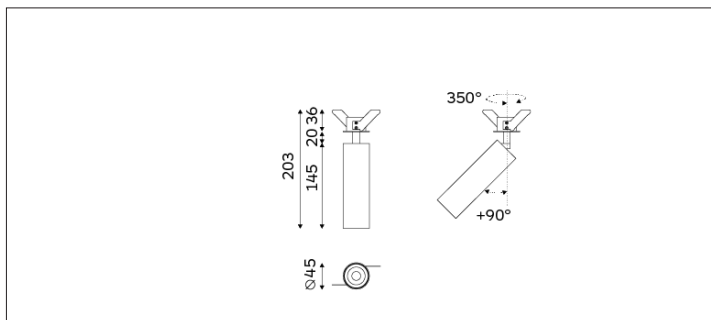

Light Distribution	FOS Recessed Downlight
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	LENS
Beam Angle	19D/23D/36D/41D
Cut Out	35mm
Connected Load	11W
Luminous Flux Of The Luminaire	808lm
Luminaire Efficacy	75lm/W
Colour Deviation	SDCM < 5
Light Source	LED
LED Type	COB
Dimming Method	Triac/1-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Matt White/ Matt Black
Weight	0.35Kg
Technical Region	220-240V 50/60Hz

Light Beam Talbe		
h(m)	E(lx)	D(m)
		23°
1.0	4010	0.42
2.0	1002	0.84
3.0	445	1.26
4.0	250	1.68
5.0	160	2.10

Application areas: retail, museums, hospitality, residential, offices and lobbies.