


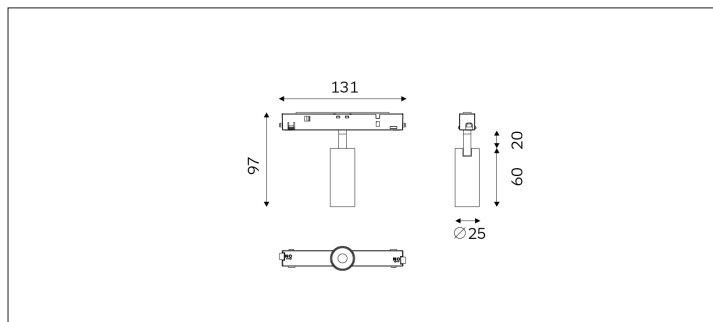


62.02511 FOS Track Lighting



Connected Load	3.8W
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	LENS
Beam Angle	17D/26D/31D/53D
Track	Low Voltage Track
Light Distribution	FOS Track Lighting
Luminous Flux Of The Luminaire	197lm
Luminaire Efficacy	52lm/W
Colour Deviation	SDCM <5
Light Source	LED
LED Type	COB
Dimming Method	1-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Matt White/ Matt Black
Weight	0.25Kg
Technical Region	Input 48V

Light Beam Talbe		
h(m)	E(lx)	D(m)
		26°
1.0	591	0.47
2.0	147	0.94
3.0	65	1.40
4.0	36	1.87
5.0	23	2.34

It is an individual solution with a high degree of flexibility. all inserts are mounted completely without tools and held within the profile by a magnetic force. With just one flick of the wrist, you can adjust the inserts as needed at any time to set the scene for your desired object. Application areas: residential, hotel, restaurants, retail and other high-end places.