

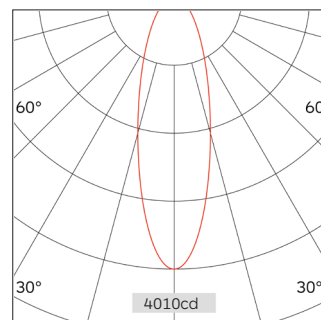


93.04512 FOS Surface Mounted Lighting

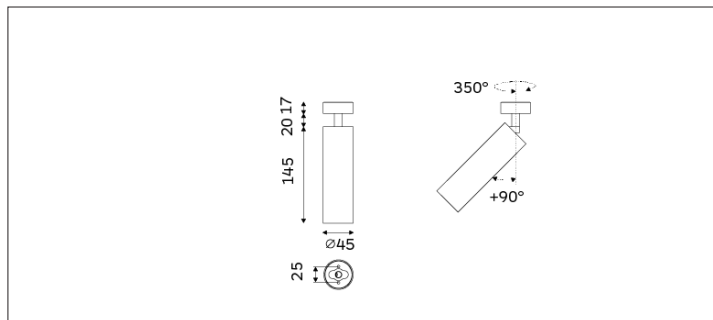

| Light Distribution | Surface Mounted Lighting |
|--------------------------------|-------------------------------|
| Colour Temperature | 2700/3000/3500/4000K |
| Colour Rendition Index | CRI 90 |
| Optics | LENS |
| Beam Angle | 19D/23D/36D/41D |
| Installation method | Surface Mounted |
| Connected Load | 11W |
| Luminous Flux Of The Luminaire | 808lm |
| Luminaire Efficacy | 75lm/W |
| Colour Deviation | SDCM < 5 |
| Light Source | LED |
| LED Type | COB |
| Dimming Method | Triac/1-10V/ Dali |
| Cover Material | Aluminum |
| Body Material | Aluminum |
| IP Rating | IP20 |
| Housing Colour | Matt White/ Matt Black |
| Weight | 0.35Kg |
| Technical Region | 220-240V 50/60Hz |

Light Beam Talbe

| h(m) | E(lx) | D(m) |
|------|-------|------|
| | | 23° |
| 1.0 | 4010 | 0.42 |
| 2.0 | 1002 | 0.84 |
| 3.0 | 445 | 1.26 |
| 4.0 | 250 | 1.68 |
| 5.0 | 160 | 2.10 |

Application areas: retail, museums, hospitality, residential, offices and lobbies.