



## 32.05529 WASHO Wall Washer Track Lighting





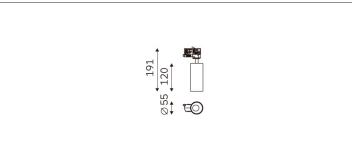



| Light Distribution             | Wall Wahser Track Lighting |  |
|--------------------------------|----------------------------|--|
| Colour Temperature             | 2700/3000/3500/4000K       |  |
| Colour Rendition Index         | CRI 90                     |  |
| Optics                         | Lens                       |  |
| Beam Angle                     | ww Tilted 20° Beam 48°     |  |
| Track Phases                   | 1 Circuit/ 3 Circuit       |  |
| Connected Load                 | 9W                         |  |
| Luminous Flux Of The Luminaire | 400lm                      |  |
| Luminaire Efficacy             | 44m/W                      |  |
| Colour Deviation               | SDCM<5                     |  |
| Light Source                   | LED                        |  |
| LED Type                       | СОВ                        |  |
| Dimming Method                 | Triac/0-10V/ Dali          |  |
| Cover Material                 | Aluminum                   |  |
| Body Material                  | Aluminum                   |  |
| IP Rating                      | IP20                       |  |
| Housing Colour                 | Sandy White/ Sandy Black   |  |
| Weight                         | 0.3Kg                      |  |
| Technical Region               | 220-240V 50/60Hz           |  |
|                                |                            |  |

| H(m) | E(lx)  | D(m) |
|------|--------|------|
|      |        | WW   |
| 1.0  | 317.36 | 0.94 |
| 2.0  | 79.34  | 1.88 |
| 3.0  | 35.26  | 2.82 |
| 4.0  | 19.83  | 3.76 |
| 5.0  | 12.69  | 4.70 |

Designed for environments requiring refined and focused lighting, including apparel shops, furniture galleries, branded retail outlets, auto display centers, jewelry and watch stores, luxury hotels, commercial chains, museums, brand experience halls, shop counters, and similar accent lighting scenes.