



52.05536 MAGFIT Recessed Downlight





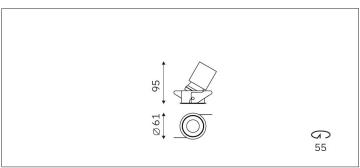













Light Distribution	Magfit Recessed Downlight	
Colour Temperature	2700/3000/3500/4000K	
Colour Rendition Index	CRI 90	
Optics	Lens	
Beam Angle	21D/26D/41D/56D	
Cut Out	55mm	
Connected Load	10W	
Luminous Flux Of The Luminaire	942lm	
Luminaire Efficacy	94lm/W	
Colour Deviation	SDCM<5	
Light Source	LED	
LED Type	COB	
Dimming Method	Triac/0-10V/ Dali	
Cover Material	Aluminum	
Body Material	Aluminum	
IP Rating	IP20	
Housing Colour	Matt White/ Matt Black	
Weight	0.3Kg	
Technical Region	220-240V 50/60Hz	

Light Beam Table

H(m)	E(lx)	D(m)
1.0	4276.68	21° 0.37
2.0	1069.17	0.74
3.0	475.19	1.11
4.0	267.29	1.48
5.0	171.07	1.85

Designed for general indoor lighting, this recessed downlight is widely used in residential ceilings, offices, conference rooms, schools, hospitals, and public buildings. The soft and comfortable light output makes it suitable for spaces that require long-hour illumination without glare or flicker.