




32.04536 BEAMX Track Lighting

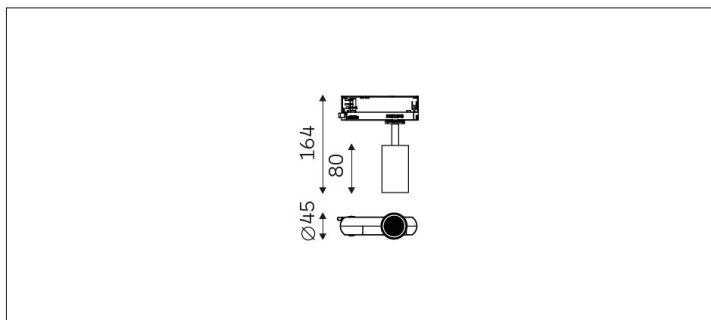

Light Distribution	BEAMX Track Lighting
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	Lens
Beam Angle	11D/20D/27D/40D/55D
Track Phases	1 Circuit/ 3 Circuit
Connected Load	10W
Luminous Flux Of The Luminaire	903lm
Luminaire Efficacy	92m/W
Colour Deviation	SDCM < 5
Light Source	LED
LED Type	COB
Dimming Method	Triac/0-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Sandy White/ Sandy Black
Weight	0.2Kg
Technical Region	220-240V 50/60Hz

Light Beam Table

H(m)	E(lx)	D(m)
		27°
1.0	4171.66	0.47
2.0	1042.92	0.94
3.0	463.52	1.41
4.0	260.73	1.89
5.0	166.87	2.36

Suitable for commercial spaces, such as clothing boutiques, furniture stores, brand display shops, automotive showrooms, jewelry counters, star-rated hotels, premium clubs, museums, chain retail stores, brand exhibition halls, professional showcases, cashier counters, and other accent lighting applications.