




33.20011 Arcwash Wall Washer Track Lighting

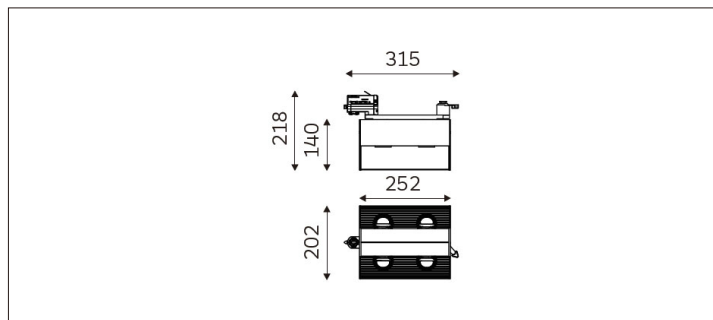

Light Distribution	Wall Washer Track Lighting
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	Lens
Beam Angle	ww Tilted 20° Beam 55°x55°
Track Phases	3 Circuit
Connected Load	50W*2
Luminous Flux Of The Luminaire	4275 lm
Luminaire Efficacy	88.5lm/W*2
Colour Deviation	SDCM<5
Light Source	LED
LED Type	COB
Dimming Method	Triac/0-10V/ Dali
Cover Material	--
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Sandy White/ Sandy Black
Weight	2.5Kg
Technical Region	220-240V 50/60Hz

Light Beam Talbe		
h(m)	E(lx)	D(m)
		ww
1.0	2360.89	0.84
2.0	590.22	1.69
3.0	262.32	2.53
4.0	147.56	3.37
5.0	94.44	4.21

A high-performance, polarized track-mounted luminaire engineered specifically for vertical illumination with precision.

Professional-grade polarized optical design ensures a clean light cut-off and minimal glare