



52.05 5 3 5 FLEXI Recessed Downlight



IP20

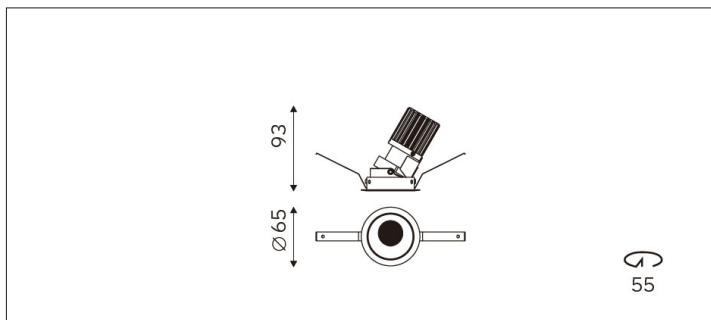

Light Distribution	FLEXI Recessed Downlight
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	Lens
Beam Angle	15D/23D/35D/51D
Cut Out	55mm
Connected Load	10W
Luminous Flux Of The Luminaire	620lm
Luminaire Efficacy	62lm/W
Colour Deviation	SDCM < 5
Light Source	LED
LED Type	COB
Dimming Method	Triac/0-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Sandy White/ Sandy Black
Weight	0.3Kg
Technical Region	220-240V 50/60Hz

Light Beam Table

H(m)	E(lx)	D(m)
		23°
1.0	3221.67	0.40
2.0	805.42	0.81
3.0	357.96	1.21
4.0	201.35	1.61
5.0	128.87	2.02

This recessed LED downlight is perfect for accent lighting in showrooms, galleries, museums, brand display areas, and designer studios. Available in multiple beam angles and color temperatures (2700K/3000K/4000K), it provides precise lighting control to enhance the display effect and highlight featured areas.