



51.13511 Recessed Downlight



IP20

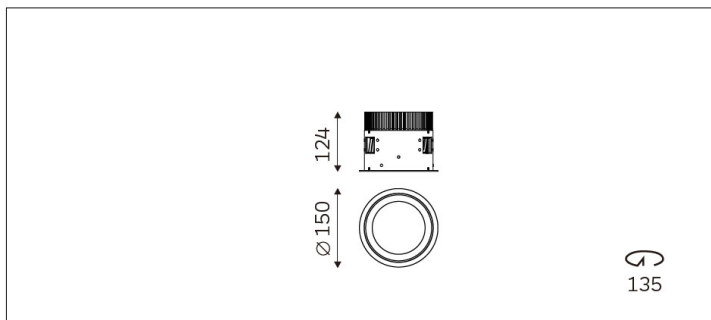

Light Distribution	Recessed Downlight
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	Reflector
Beam Angle	21D/38D/56D/66D
Cut Out	135mm
Connected Load	60W
Luminous Flux Of The Luminaire	7546lm
Luminaire Efficacy	126lm/W
Colour Deviation	SDCM < 5
Light Source	LED
LED Type	COB
Dimming Method	Triac/0-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Sandy White/ Sandy Black
Weight	1Kg
Technical Region	220-240V 50/60Hz

Light Beam Table

H(m)	E(lx)	D(m)
		56°
1.0	9017.03	1.07
2.0	2254.26	2.14
3.0	1001.89	3.21
4.0	563.56	4.27
5.0	360.68	5.34

Application for: household, shopping malls, hotels, clubs, stores and jewelry display lighting field.