



$5\,1.0\,5\,0\,1\,3\,$ SHOWLITE Wall Washer Recessed Downlight





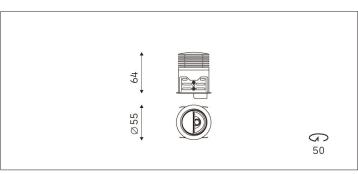









Technical Region





Light Distribution	Showlite Recessed Downlight
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	Lens
Beam Angle	Wall Washer
Cut Out	50mm
Connected Load	9W
Luminous Flux Of The Luminaire	425lm
Luminaire Efficacy	47m/W
Colour Deviation	SDCM<5
Light Source	LED
LED Type	СОВ
Dimming Method	Triac/0-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Matt White/ Matt Black
Weight	0.1Kg

220-240V 50/60Hz

Light Beam Table				_
	Lial	nt Re	am 1	Table

H(m)	E(lx)	D(m)
		48°
1.0	478.42	0.89
2.0	119.60	1.79
3.0	53.16	2.68
4.0	29.90	3.57
5.0	19.14	4.47

SHOWLITE Cabinet Light is ideal for display cabinets, retail showcases, kitchen shelves, museum exhibits, and residential or hospitality interiors. Compact and precise, it offers discreet installation, focused beam control, and high visual comfort for professional lighting applications.