



51.10013 X-DRIVE Wall Washer Recessed Downlight



IP20

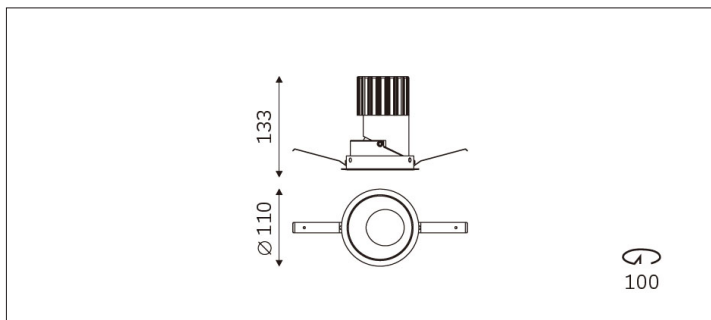

Light Distribution	Recessed Downlight
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	Lens
Beam Angle	Wall Washer
Cut Out	100mm
Connected Load	28W
Luminous Flux Of The Luminaire	1754lm
Luminaire Efficacy	62m/W
Colour Deviation	SDCM < 5
Light Source	LED
LED Type	COB
Dimming Method	Triac/0-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Sandy White/ Sandy Black
Weight	0.5Kg
Technical Region	220-240V 50/60Hz

Light Beam Table

H(m)	E(lx)	D(m)
		52°
1.0	1125.53	1.14
2.0	281.38	2.28
3.0	125.06	3.43
4.0	70.35	4.57
5.0	45.02	5.71

This recessed LED downlight is perfect for accent lighting in showrooms, galleries, museums, brand display areas, and designer studios. Available in multiple beam angles and color temperatures (2700K/3000K/4000K), it provides precise lighting control to enhance the display effect and highlight featured areas.