




52.07530 X-DRIVE Recessed Downlight

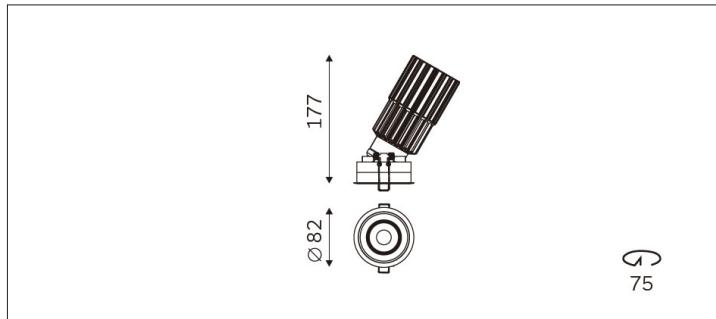

Light Distribution	Recessed Downlight	
Colour Temperature	2700/3000/3500/4000K	
Colour Rendition Index	CRI 90	
Optics	Lens	
Beam Angle	29D/35D/49D/57D	
Cut Out	75mm	
Connected Load	35W	
Luminous Flux Of The Luminaire	4126lm	
Luminaire Efficacy	117lm/W	
Colour Deviation	SDCM<5	
Light Source	LED	
LED Type	COB	
Dimming Method	Triac/0-10V/ Dali	
Cover Material	Aluminum	
Body Material	Aluminum	
IP Rating	IP20	
Housing Colour	Sandy White/ Sandy Black	
Weight	0.6Kg	
Technical Region	220-240V 50/60Hz	

Light Beam Table		
H(m)	E(lx)	D(m)
1.0	11244.26	0.52
2.0	2811.06	1.04
3.0	1249.36	1.56
4.0	702.77	2.08
5.0	449.77	2.60

Engineered for global lighting projects, this energy-saving LED recessed downlight is suitable for apartments, commercial buildings, retail chains, hotels, educational institutions, and industrial facilities. CE and RoHS certified, it is compatible with international installation standards and supports OEM/ODM customization.