




# 52.05013 SHOWLITE Recessed Downlight

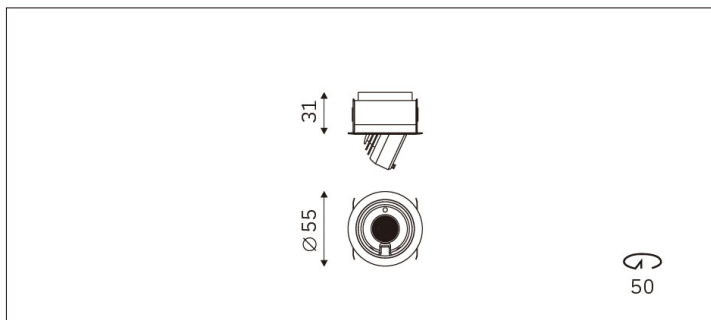

| Light Distribution             | Showlite Recessed Downlight |
|--------------------------------|-----------------------------|
| Colour Temperature             | 2700/3000/3500/4000K        |
| Colour Rendition Index         | CRI 90                      |
| Optics                         | Lens                        |
| Beam Angle                     | 28D/35D/38D/53D             |
| Cutout                         | 50mm                        |
| Connected Load                 | 4W                          |
| Luminous Flux Of The Luminaire | 301lm                       |
| Luminaire Efficacy             | 75lm/W                      |
| Colour Deviation               | SDCM < 5                    |
| Light Source                   | LED                         |
| LED Type                       | COB                         |
| Dimming Method                 | Triac/0-10V/ Dali           |
| Cover Material                 | Aluminum                    |
| Body Material                  | Aluminum                    |
| IP Rating                      | IP20                        |
| Housing Colour                 | Matt White/ Matt Black      |
| Weight                         | 0.1Kg                       |
| Technical Region               | 220-240V 50/60Hz            |

| Light Beam Talbe |        |      |
|------------------|--------|------|
| h(m)             | E(lx)  | D(m) |
|                  |        | 28°  |
| 1.0              | 801.61 | 0.5  |
| 2.0              | 200.4  | 0.99 |
| 3.0              | 89.07  | 1.49 |
| 4.0              | 50.1   | 1.99 |
| 5.0              | 32.06  | 2.48 |

SHOWLITE Cabinet Light is ideal for display cabinets, retail showcases, kitchen shelves, museum exhibits, and residential or hospitality interiors. Compact and precise, it offers discreet installation, focused beam control, and high visual comfort for professional lighting applications.