




52.12513 COVIA Recessed Downlight

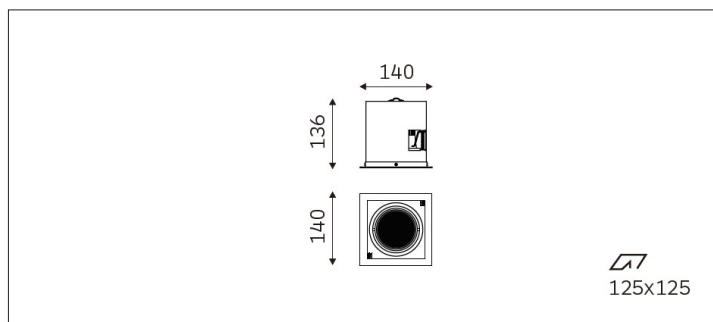

Light Distribution	Covia Recessed Downlight
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	Lens
Beam Angle	18D/24D/38D/47D
Cut Out	125*125mm
Connected Load	23W
Luminous Flux Of The Luminaire	2876lm
Luminaire Efficacy	125m/W
Colour Deviation	SDCM<5
Light Source	LED
LED Type	COB
Dimming Method	Triac/0-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Sandy White/ Sandy Black
Weight	0.6Kg
Technical Region	220-240V 50/60Hz

Light Beam Table

H(m)	E(lx)	D(m)
		24°
1.0	14875.78	0.44
2.0	3718.95	0.88
3.0	1652.86	1.31
4.0	929.74	1.75
5.0	595.03	2.19

This recessed LED downlight is ideal for commercial lighting applications such as shopping malls, retail stores, supermarkets, corridors, restaurants, cafés, and hotel lobbies. It delivers uniform illumination with high energy efficiency, making it a reliable solution for professional commercial interior lighting projects.