



51.16011 Recessed Downlight



IP20

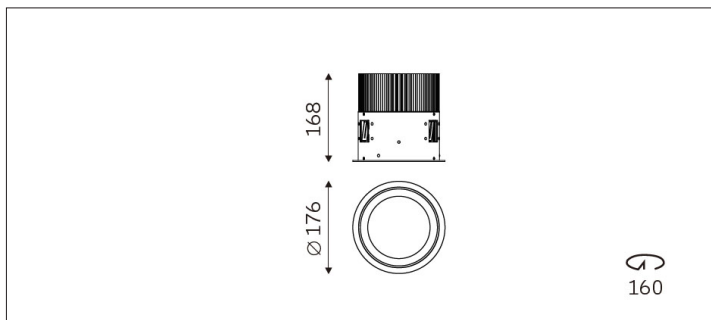

Light Distribution	Recessed Downlight
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	Reflector
Beam Angle	26D/36D/46D/70D
Cut Out	160mm
Connected Load	80W
Luminous Flux Of The Luminaire	9122lm
Luminaire Efficacy	114lm/W
Colour Deviation	SDCM < 5
Light Source	LED
LED Type	COB
Dimming Method	Triac/0-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Sandy White/ Sandy Black
Weight	1Kg
Technical Region	220-240V 50/60Hz

Light Beam Table

H(m)	E(lx)	D(m)
		46°
1.0	13630.17	0.85
2.0	3407.54	1.71
3.0	1514.46	2.56
4.0	851.89	3.41
5.0	545.21	4.27

Application for: household, shopping malls, hotels, clubs, stores and jewelry display lighting field.