




# 52.05533 X-DRIVE Recessed Downlight

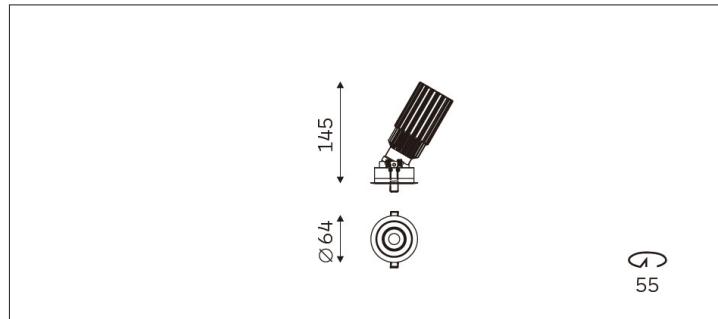

Light Distribution	Recessed Downlight
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	Lens
Beam Angle	30D/35D/49D/59D
Cut Out	55mm
Connected Load	18W
Luminous Flux Of The Luminaire	1733lm
Luminaire Efficacy	96lm/W
Colour Deviation	SDCM<5
Light Source	LED
LED Type	COB
Dimming Method	Triac/0-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Sandy White/ Sandy Black
Weight	0.3Kg
Technical Region	220-240V 50/60Hz

Light Beam Table		
H(m)	E(lx)	D(m)
1.0	4080.90	0.54
2.0	1020.22	1.08
3.0	453.43	1.62
4.0	255.06	2.16
5.0	163.24	2.69

Engineered for global lighting projects, this energy-saving LED recessed downlight is suitable for apartments, commercial buildings, retail chains, hotels, educational institutions, and industrial facilities. CE and RoHS certified, it is compatible with international installation standards and supports OEM/ODM customization.