




32.05315 BEAMX Track Lighting

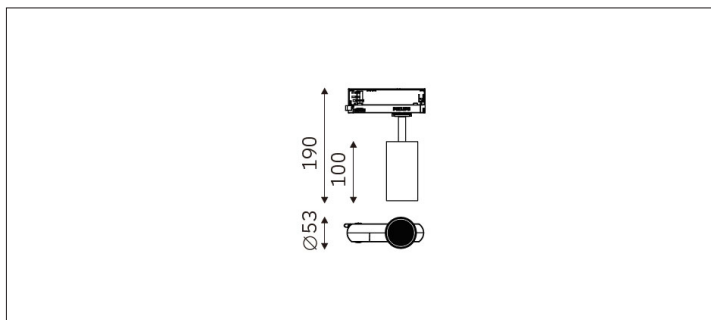

Light Distribution	BEAMX Track Lighting
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	Lens
Beam Angle	8D/18D/31D/41D/53D
Track Phases	1 Circuit/ 3 Circuit
Connected Load	15W
Luminous Flux Of The Luminaire	1396lm
Luminaire Efficacy	93m/W
Colour Deviation	SDCM < 5
Light Source	LED
LED Type	COB
Dimming Method	Triac/0-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Sandy White/ Sandy Black
Weight	0.4Kg
Technical Region	220-240V 50/60Hz

Light Beam Table

H(m)	E(lx)	D(m)
		41°
1.0	2902.12	0.74
2.0	725.53	1.48
3.0	322.46	2.22
4.0	181.38	2.96
5.0	116.08	3.70

Suitable for commercial spaces, such as clothing boutiques, furniture stores, brand display shops, automotive showrooms, jewelry counters, star-rated hotels, premium clubs, museums, chain retail stores, brand exhibition halls, professional showcases, cashier counters, and other accent lighting applications.