



## 51.07526 X-DRIVE Wall Washer Recessed Downlight





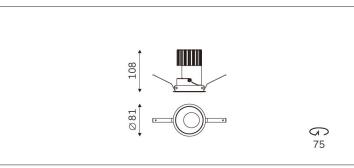





Light Distribution	Recessed Downlight
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	Lens
Beam Angle	Wall Washer
Cut Out	75mm
Connected Load	15W
Luminous Flux Of The Luminaire	1123lm
Luminaire Efficacy	74m/W
Colour Deviation	SDCM<5
Light Source	LED
LED Type	COB
Dimming Method	Triac/0-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Sandy White/ Sandy Black
Weight	0.4Kg
Technical Region	220-240V 50/60Hz

H(m)	E(lx)	D(m)
		72°
1.0	631.83	1.34
2.0	157.96	2.68
3.0	70.20	4.02
4.0	39.49	5.37
5.0	25.27	6.71

This recessed LED downlight is perfect for accent lighting in showrooms, galleries, museums, brand display areas, and designer studios. Available in multiple beam angles and color temperatures (2700K/3000K/4000K), it provides precise lighting control to enhance the display effect and highlight featured areas.