




93.04520 SPECTRUM Rod Suspension Light

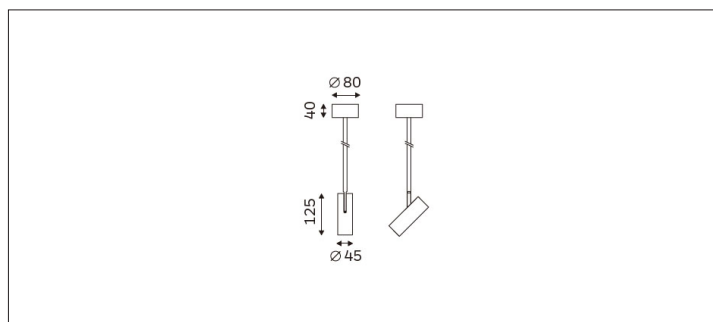

Light Distribution	Spectrum rod suspension light
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	Lens
Beam Angle	20D/24D/36D/43D
Track Phases	Spectrum rod suspension light
Connected Load	14.3W
Luminous Flux Of The Luminaire	1083lm
Luminaire Efficacy	76lm/W
Colour Deviation	SDCM < 5
Light Source	LED
LED Type	COB
Dimming Method	1-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Sandy White/ Sandy Black
Weight	0.45Kg
Technical Region	220-240V 50/60Hz

Light Beam Table

H(m)	E(lx)	D(m)
		36°
1.0	2731.38	0.66
2.0	682.95	1.31
3.0	303.53	1.97
4.0	170.74	2.62
5.0	109.27	3.28

Mainly used in high-end commercial space (clothing shops, furniture shops and other brand boutiques, car displays, jewelry, star hotels, high-end clubs, museums, chain stores, brand saleshalls, professional windows, counters and other accent lighting places).