



52.09535 VOLI Recessed Downlight



IP20

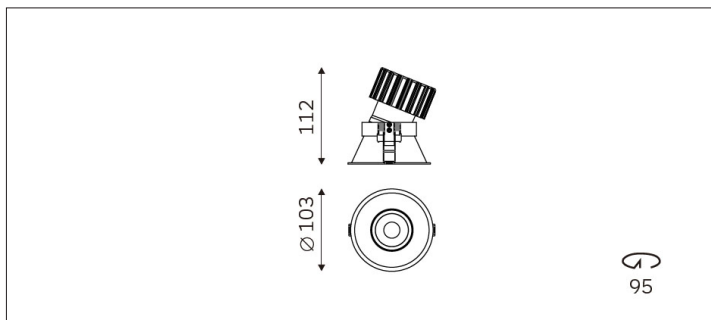

Rotate
350°

Light Distribution	Voli Recessed Downlight
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	Lens
Beam Angle	25D/31D/42D/49D
Cut Out	95mm
Connected Load	25W
Luminous Flux Of The Luminaire	2900lm
Luminaire Efficacy	116lm/W
Colour Deviation	SDCM < 5
Light Source	LED
LED Type	COB
Dimming Method	Triac/0-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Sandy White/ Sandy Black
Weight	0.3Kg
Technical Region	220-240V 50/60Hz

Light Beam Table

H(m)	E(lx)	D(m)
		25°
1.0	12765.12	0.45
2.0	3191.28	0.90
3.0	1418.35	1.36
4.0	797.82	1.81
5.0	510.60	2.26

This professional architectural recessed downlight is ideal for lighting engineering projects, including luxury villas, hotels, premium office buildings, retail chains, and commercial complexes. Featuring high CRI lighting and low UGR anti-glare design, it enhances visual comfort and meets architectural lighting standards.