



91.05513 WASHO Surface Mounted Light



IP20

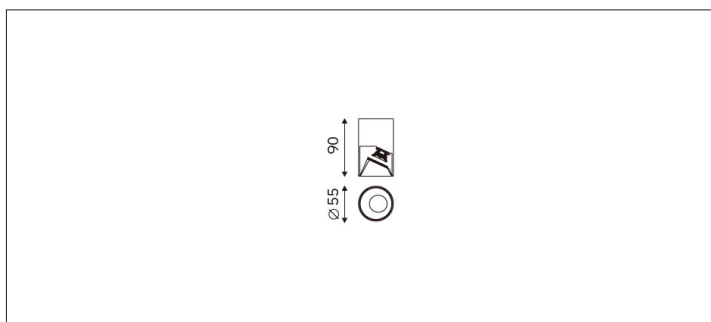

Light Distribution	Surface Mounted Light
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	Lens
Beam Angle	ww Tilted 20° Beam 48°
Installation method	Surface Mounted
Connected Load	9W
Luminous Flux Of The Luminaire	400lm
Luminaire Efficacy	44lm/W
Colour Deviation	SDCM < 5
Light Source	LED
LED Type	COB
Dimming Method	Triac/0-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Sandy White/ Sandy Black
Weight	0.3Kg
Technical Region	220-240V 50/60Hz

Light Beam Table

H(m)	E(lx)	D(m)
		ww
1.0	317.36	0.94
2.0	79.34	1.88
3.0	35.26	2.82
4.0	19.83	3.76
5.0	12.69	4.70

Designed for environments requiring refined and focused lighting, including apparel shops, furniture galleries, branded retail outlets, auto display centers, jewelry and watch stores, luxury hotels, commercial chains, museums, brand experience halls, shop counters, and similar accent lighting scenes.