



52.10512 WALLI Wall Washer Recessed Downlight



IP20

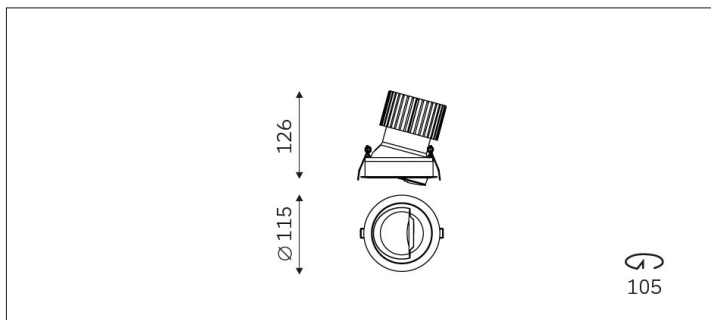

Rotate
350°

Light Distribution	Walli Recessed Downlight
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	Lens
Beam Angle	ww Tilted 20° Beam 40°
Cut Out	105mm
Connected Load	30W
Luminous Flux Of The Luminaire	1707lm
Luminaire Efficacy	57m/W
Colour Deviation	SDCM < 5
Light Source	LED
LED Type	COB
Dimming Method	Triac/0-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Sandy White/ Sandy Black
Weight	0.4Kg
Technical Region	220-240V 50/60Hz

Light Beam Table

H(m)	E(lx)	D(m)
		ww
1.0	500.38	0.64
2.0	125.10	1.28
3.0	55.60	1.92
4.0	31.27	2.57
5.0	20.02	3.21

This professional architectural recessed downlight is ideal for lighting engineering projects, including luxury villas, hotels, premium office buildings, retail chains, and commercial complexes. Featuring high CRI lighting and low UGR anti-glare design, it enhances visual comfort and meets architectural lighting standards.