



51.10012 FLEXI Recessed Downlight



IP20

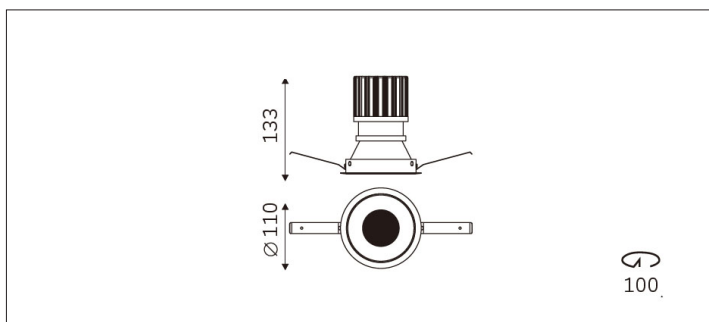

Light Distribution	FLEXI Recessed Downlight
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	Lens
Beam Angle	25D/31D/42D/49D
Cut Out	100mm
Connected Load	28W
Luminous Flux Of The Luminaire	3081lm
Luminaire Efficacy	110lm/W
Colour Deviation	SDCM < 5
Light Source	LED
LED Type	COB
Dimming Method	Triac/0-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Sandy White/ Sandy Black
Weight	0.4Kg
Technical Region	220-240V 50/60Hz

Light Beam Table

H(m)	E(lx)	D(m)
		25°
1.0	12765.12	0.45
2.0	3191.28	0.90
3.0	1418.35	1.36
4.0	797.82	1.81
5.0	510.60	2.26

This recessed LED downlight is perfect for accent lighting in showrooms, galleries, museums, brand display areas, and designer studios. Available in multiple beam angles and color temperatures (2700K/3000K/4000K), it provides precise lighting control to enhance the display effect and highlight featured areas.