



52.05 0 1 5 OPTIMAX Recessed Downlight



IP20

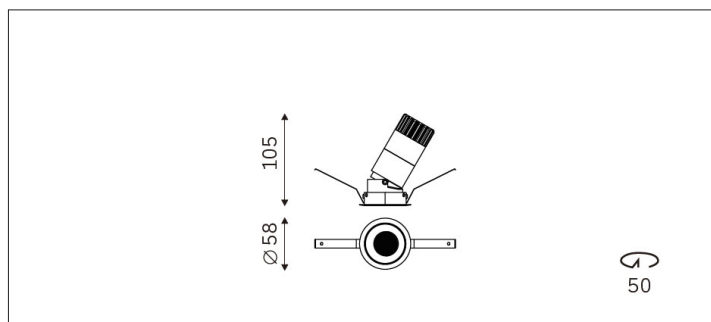

Light Distribution	Optimax Recessed Downlight
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	Lens
Beam Angle	19D/28D/41D/51D
Cut Out	50mm
Connected Load	8W
Luminous Flux Of The Luminaire	601lm
Luminaire Efficacy	75lm/W
Colour Deviation	SDCM < 5
Light Source	LED
LED Type	COB
Dimming Method	Triac/0-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Sandy White/ Sandy Black
Weight	0.2Kg
Technical Region	220-240V 50/60Hz

Light Beam Table

H(m)	E(lx)	D(m)
		19°
1.0	3505.70	0.34
2.0	876.42	0.68
3.0	389.52	1.02
4.0	219.11	1.36
5.0	140.23	1.70

Designed for general indoor lighting, this recessed downlight is widely used in residential ceilings, offices, conference rooms, schools, hospitals, and public buildings. The soft and comfortable light output makes it suitable for spaces that require long-hour illumination without glare or flicker.