

Report No.:

Test Time: 2025-08-26 20:05

## Luminaire Property

Luminaire Manufacturer:

Lamp Description: V13C F90 930

Luminous Width (mm): -63

Current: 0.120 A

Power Factor: 0.966

Luminous Length (mm): -63

Voltage: 228.0 V

Power: 26.40 W

## Photometric Results

CIE Class: Direct

Measurement Flux: 3127.3 lm

Downward Ratio: 100%

Horizontal Diffuse Angle(50%): H58.3

Vertical Diffuse Angle(50%): V58.3

Luminaire Efficacy Rating (LER): 118.51

Max. Intensity: 3521.38 cd

S/MH(C0/C180): 0.95

Total Rated Lamp Lumens: 3127.3 lm

Efficiency: 100%

Upward Ratio: 0%

Central Intensity: 3507.1 cd


Pos of Max. Intensity: H0 V7

S/MH(C90/C270): 0.95

Picture Of Luminaire



Luminous Intensity Distribution Curve

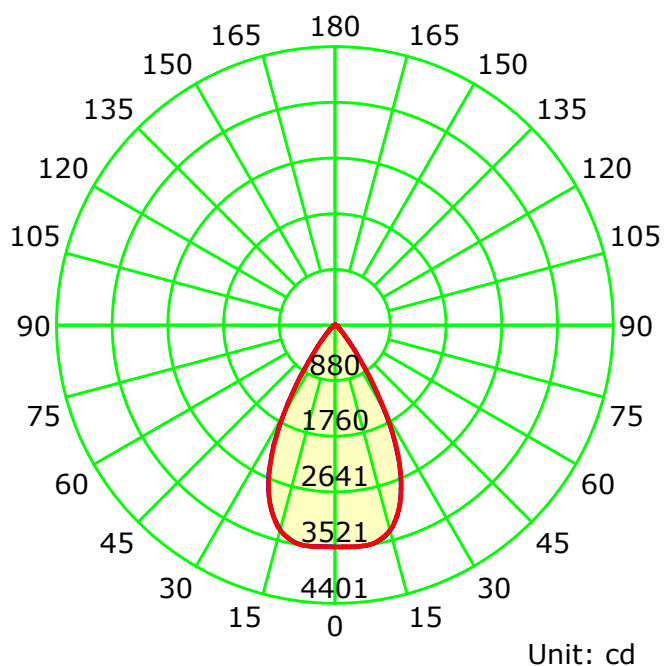

— C0-C180 — C90-C270

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0



Test Device: CHL-6E

Distance: 2.905 m

Humidity:

Inspector:


## Luminous Intensity Distribution Curve

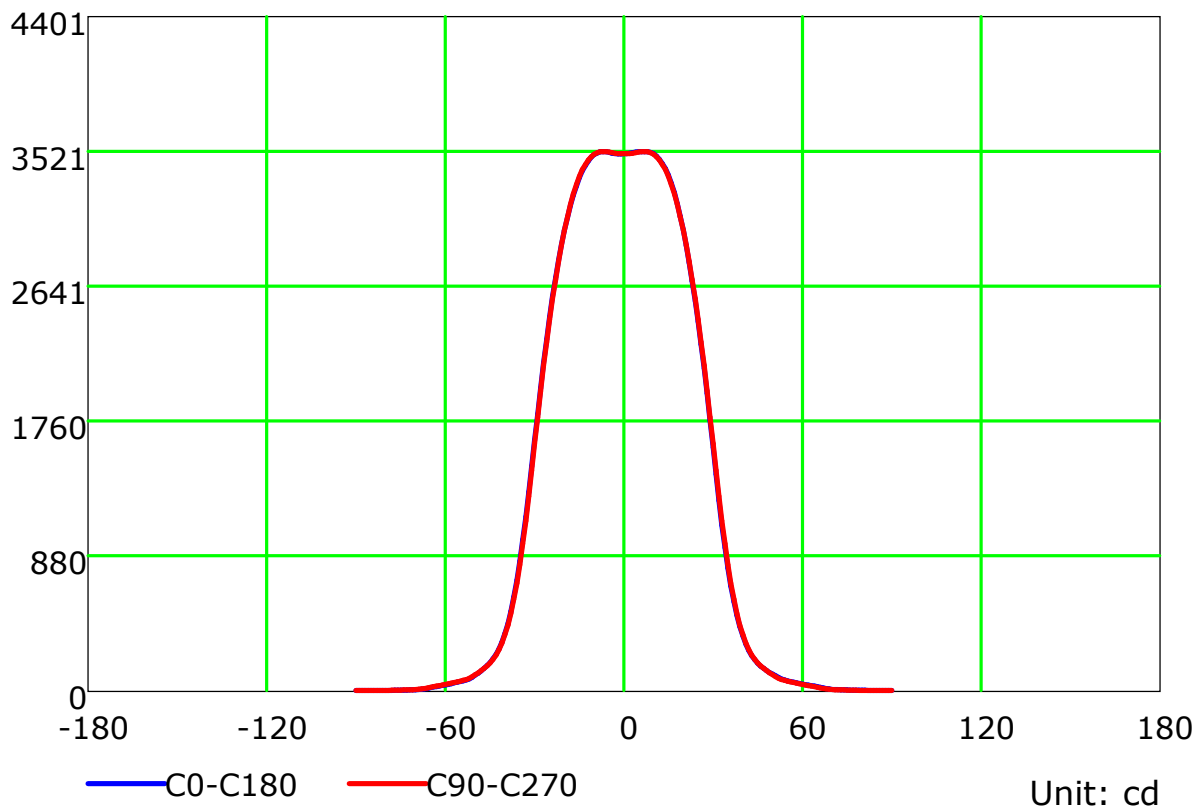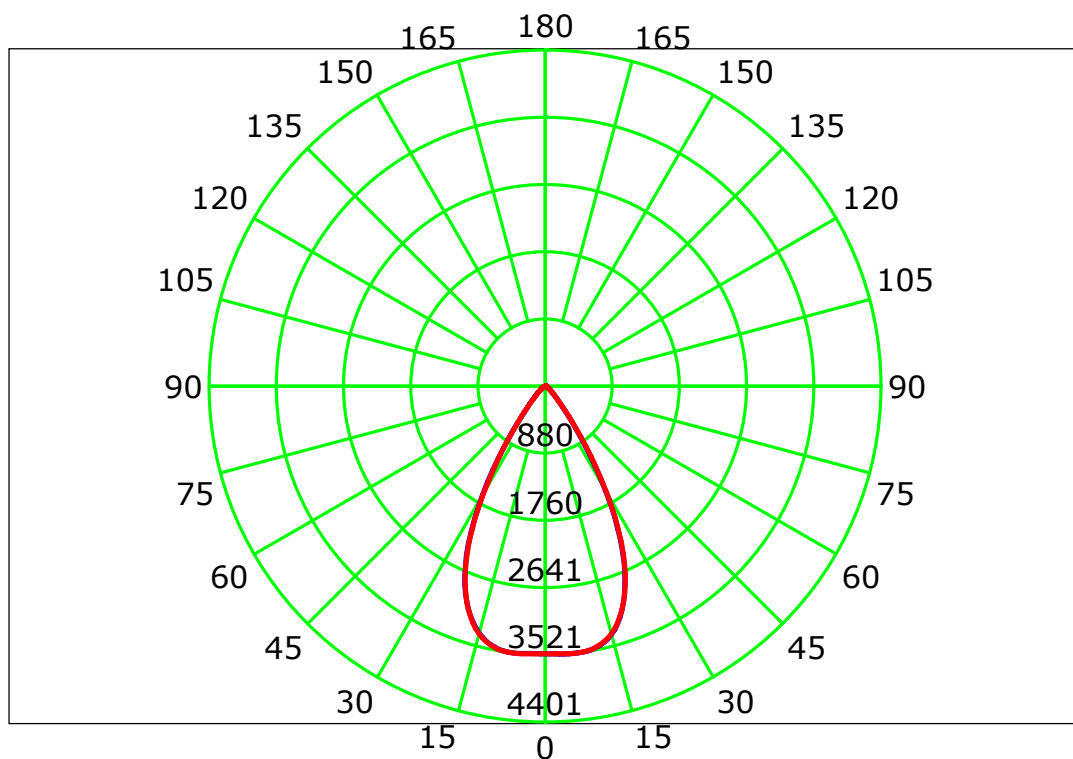

C Plane (°):0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°):0.0-90.0:1.0  
Test Device: CHL-6E  
Distance: 2.905 m  
Humidity:  
Inspector:


## Luminous Intensity Distribution Curve(cd/klm)

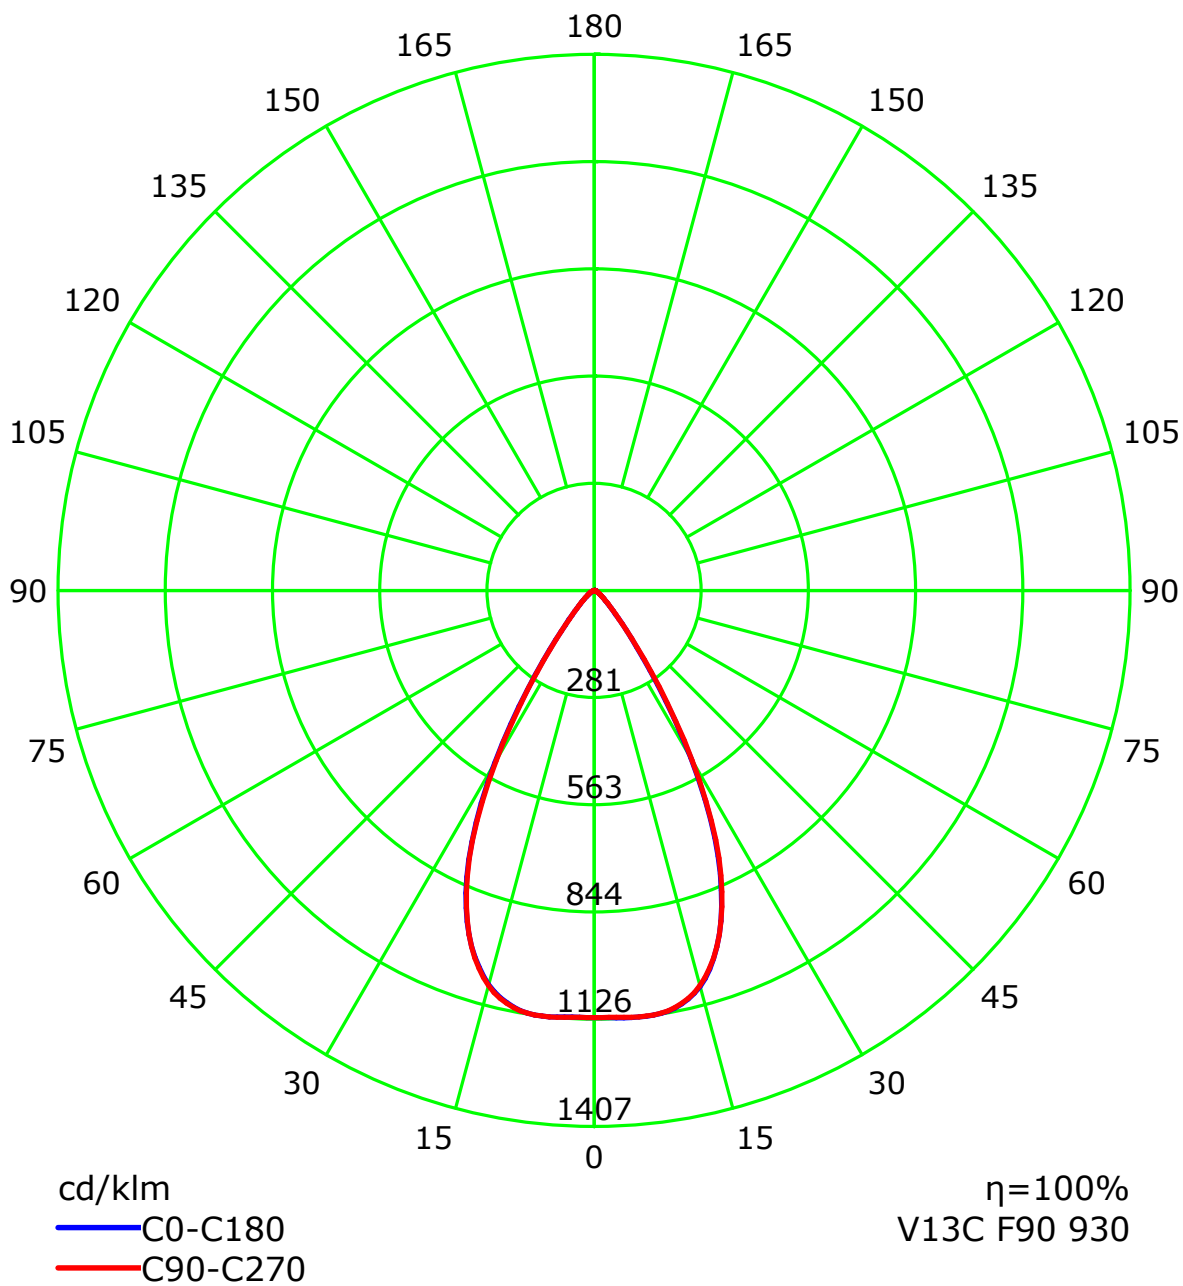

C Plane (°):0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°):0.0-90.0:1.0  
Test Device: CHL-6E  
Distance: 2.905 m  
Humidity:  
Inspector:

## Isocandela (rectangle)

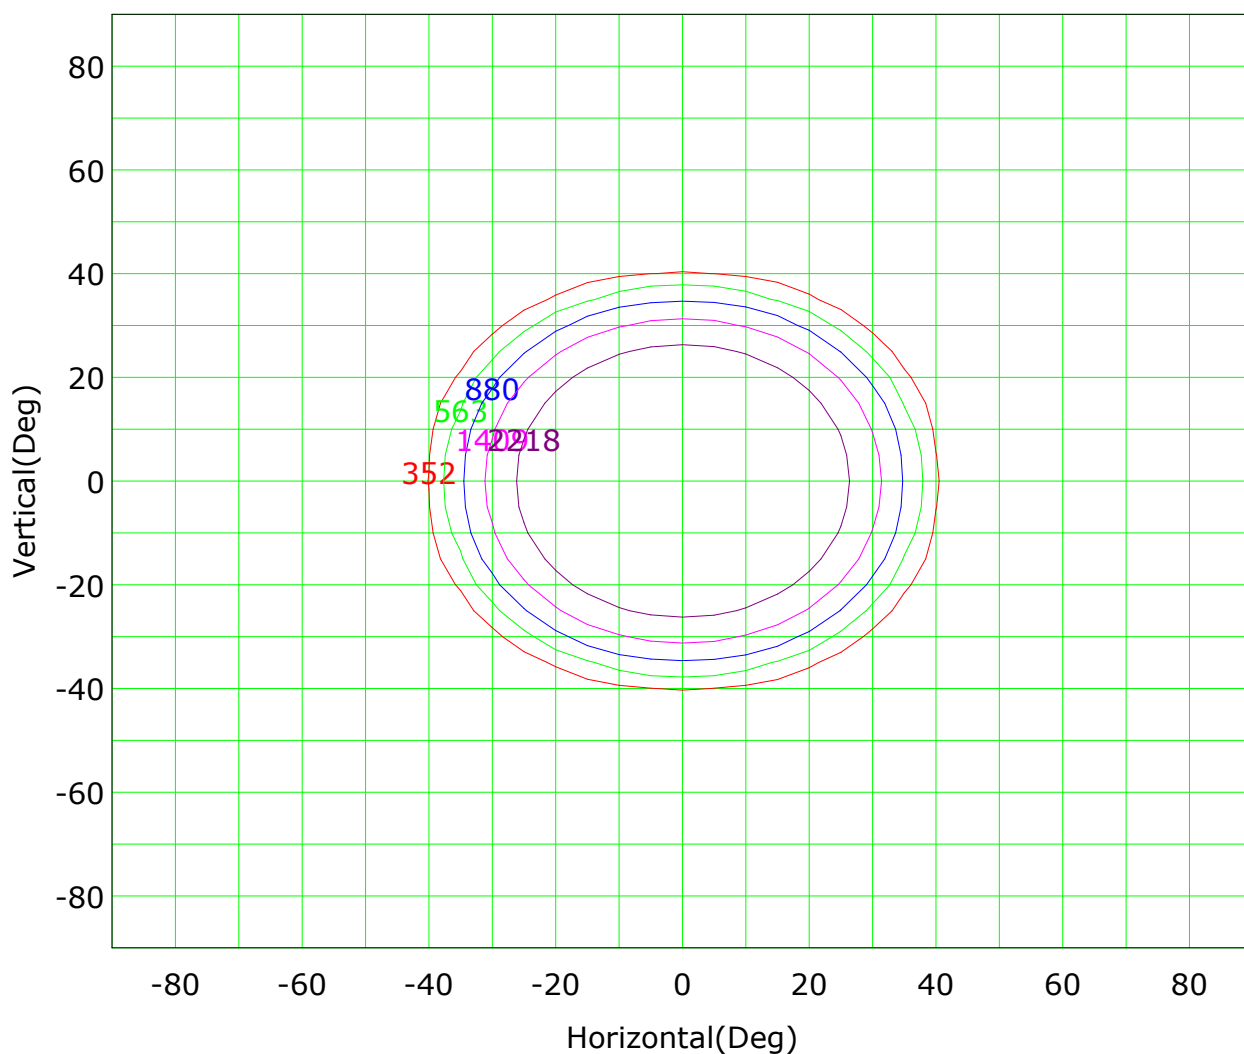

Imax (100%): 3521 cd

( 10%): 352 cd	( 16%): 563 cd
( 25%): 880 cd	( 40%): 1409 cd
( 63%): 2218 cd	(100%): 3521 cd

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0


Test Device: CHL-6E

Distance: 2.905 m

Humidity:

Inspector:

## IsoLux Plot

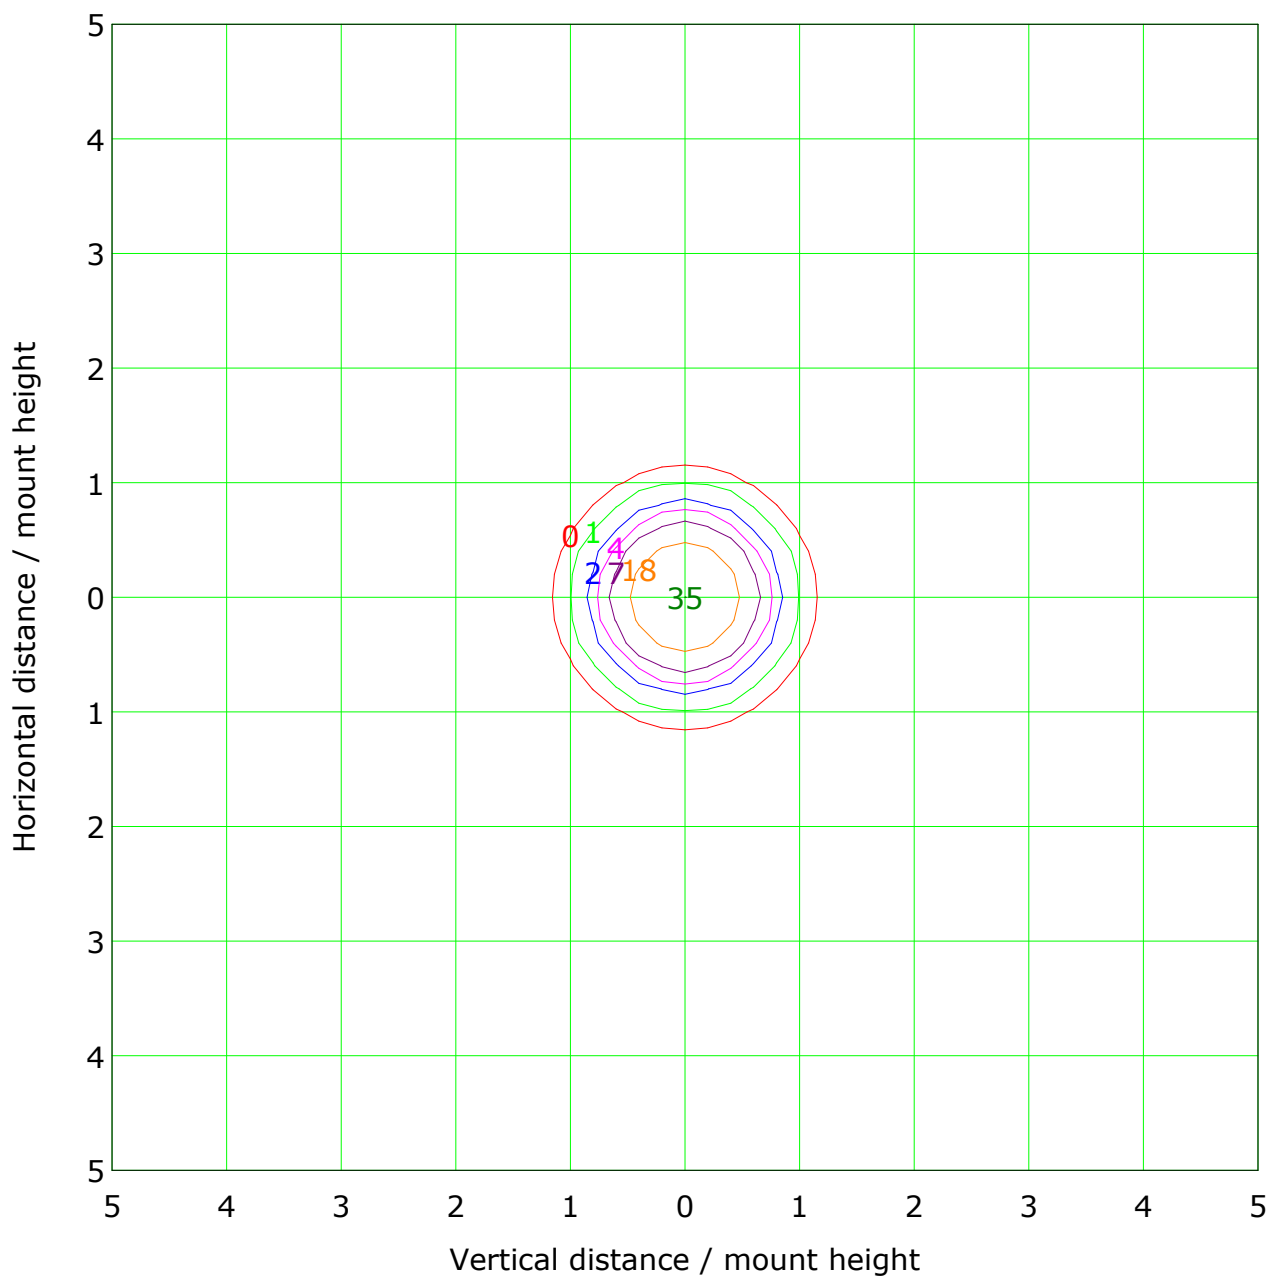


Mounting Height: 10.0m    Max Lux(100%): 35.1 lx

( 1%): 0.4 lx	( 2%): 0.7 lx
( 5%): 1.8 lx	( 10%): 3.5 lx
( 20%): 7.0 lx	( 50%): 17.5 lx
(100%): 35.1 lx	


C Plane (°):0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°):0.0-90.0:1.0  
Test Device: CHL-6E  
Distance: 2.905 m  
Humidity:  
Inspector:

## Illuminance at a Distance

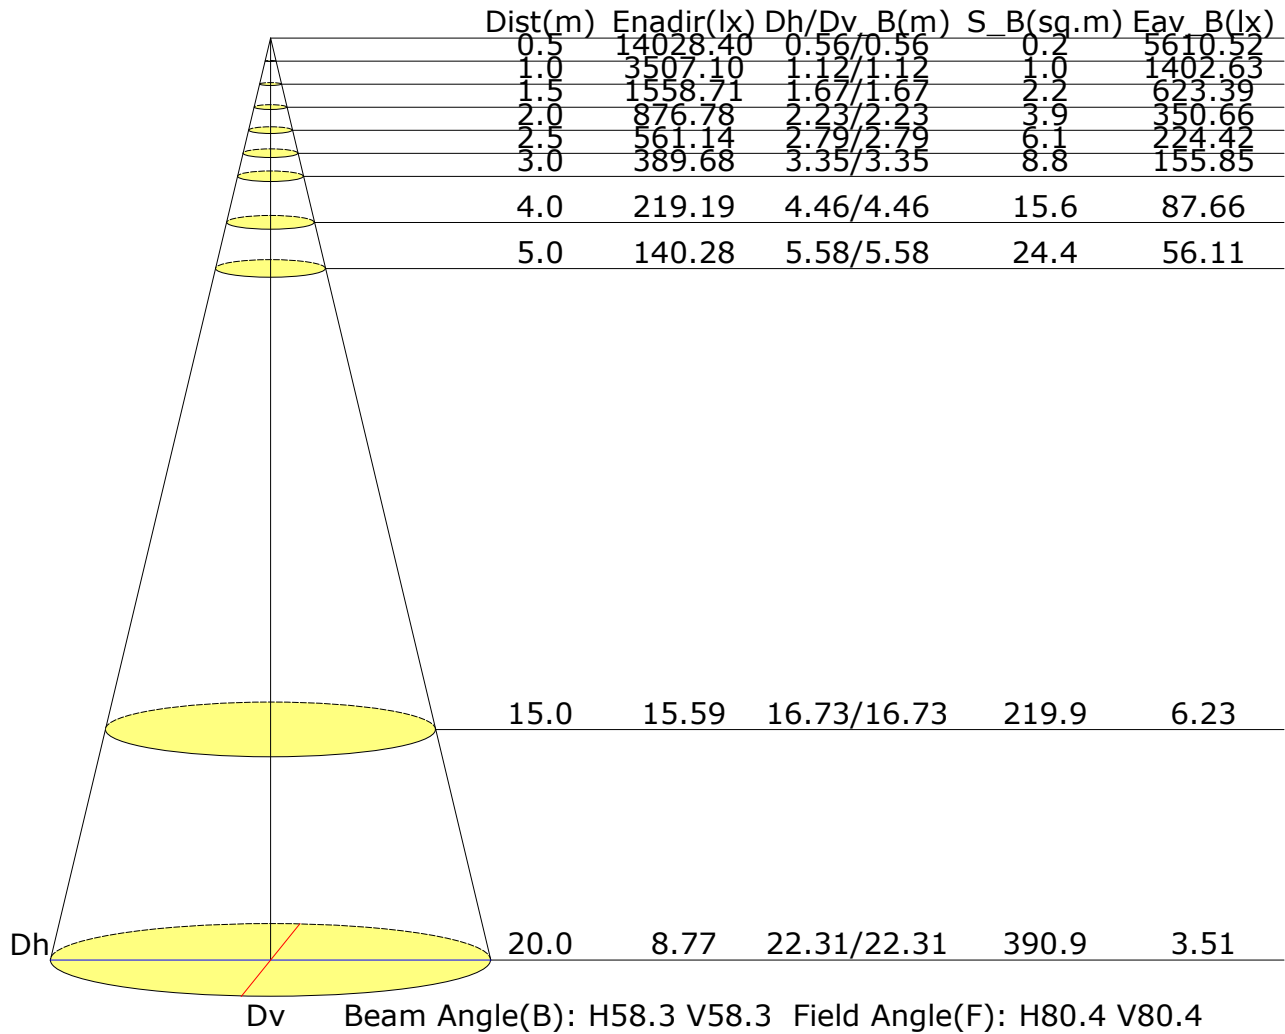

## Vertical IsoLux Plot

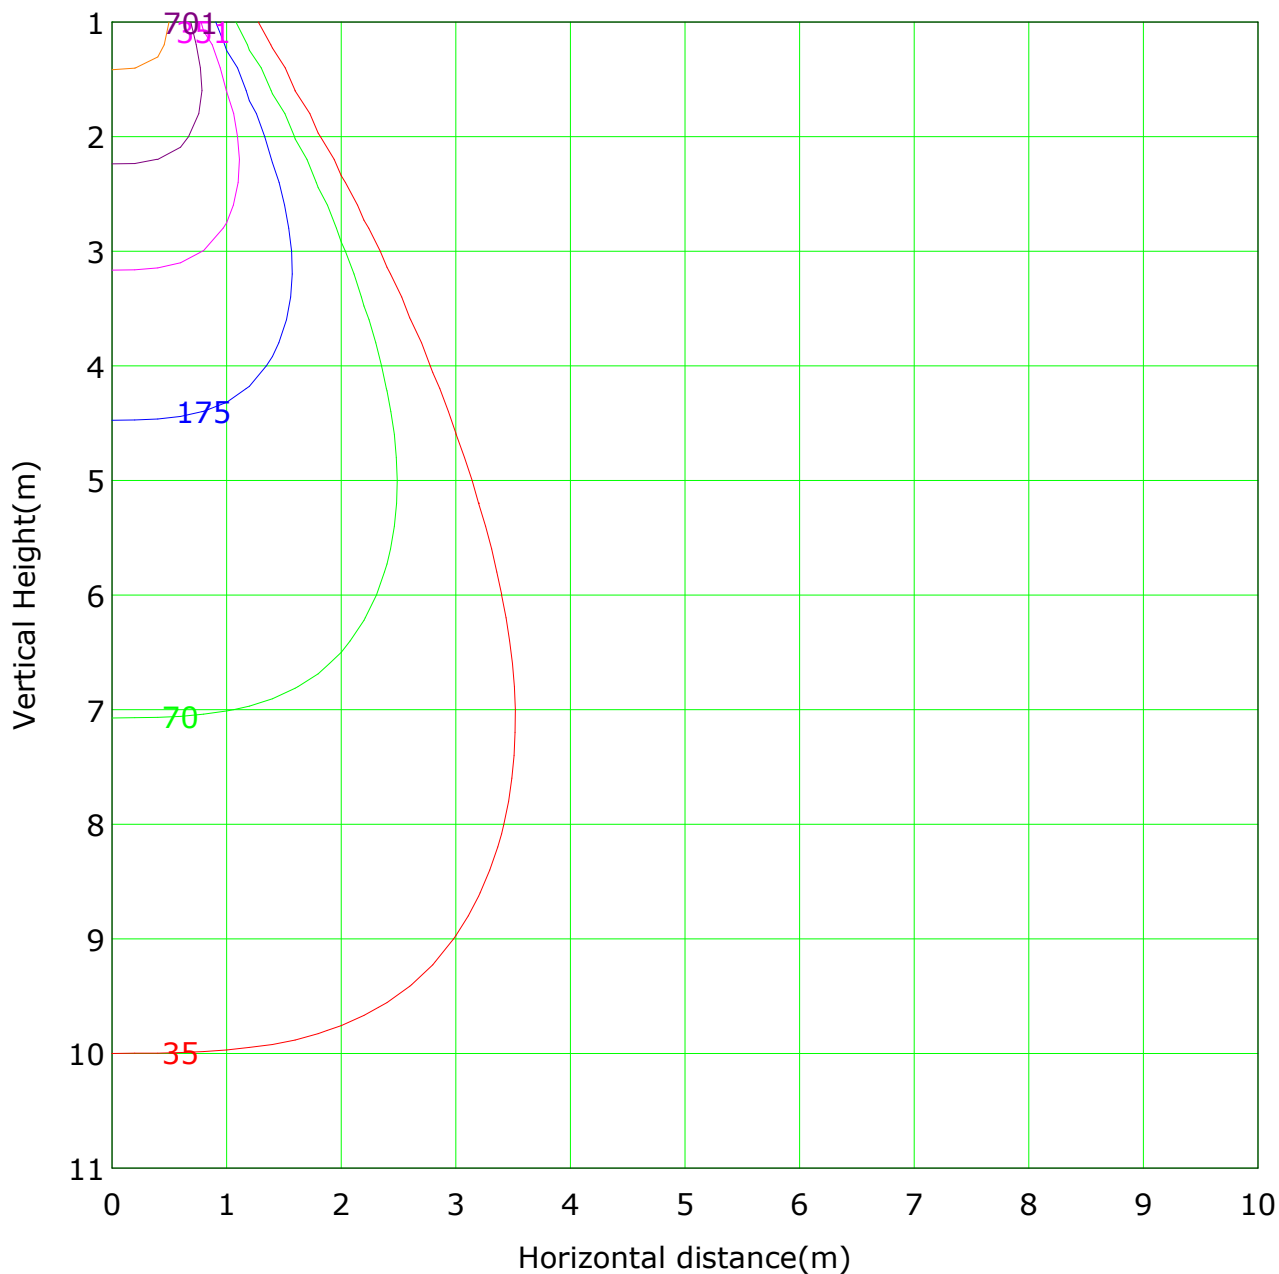

Lowest(m): 1.0m    Highest(m): 11.0m    Max Lux: 3507.1 lx  
— ( 1%): 35.1 lx                      — ( 2%): 70.1 lx  
— ( 5%): 175.4 lx                      — ( 10%): 350.7 lx  
— ( 20%): 701.4 lx                      — ( 50%): 1753.6 lx  
— (100%): 3507.1 lx


C Plane (°): 0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°): 0.0-90.0: 1.0  
Test Device: CHL-6E  
Distance: 2.905 m  
Humidity:  
Inspector:

Gamma Plane (°):0.0-90.0:1.0  
Test Device: CHL-6E  
Distance: 2.905 m  
Humidity:  
Inspector:



## The Average Illuminance Effective Figure

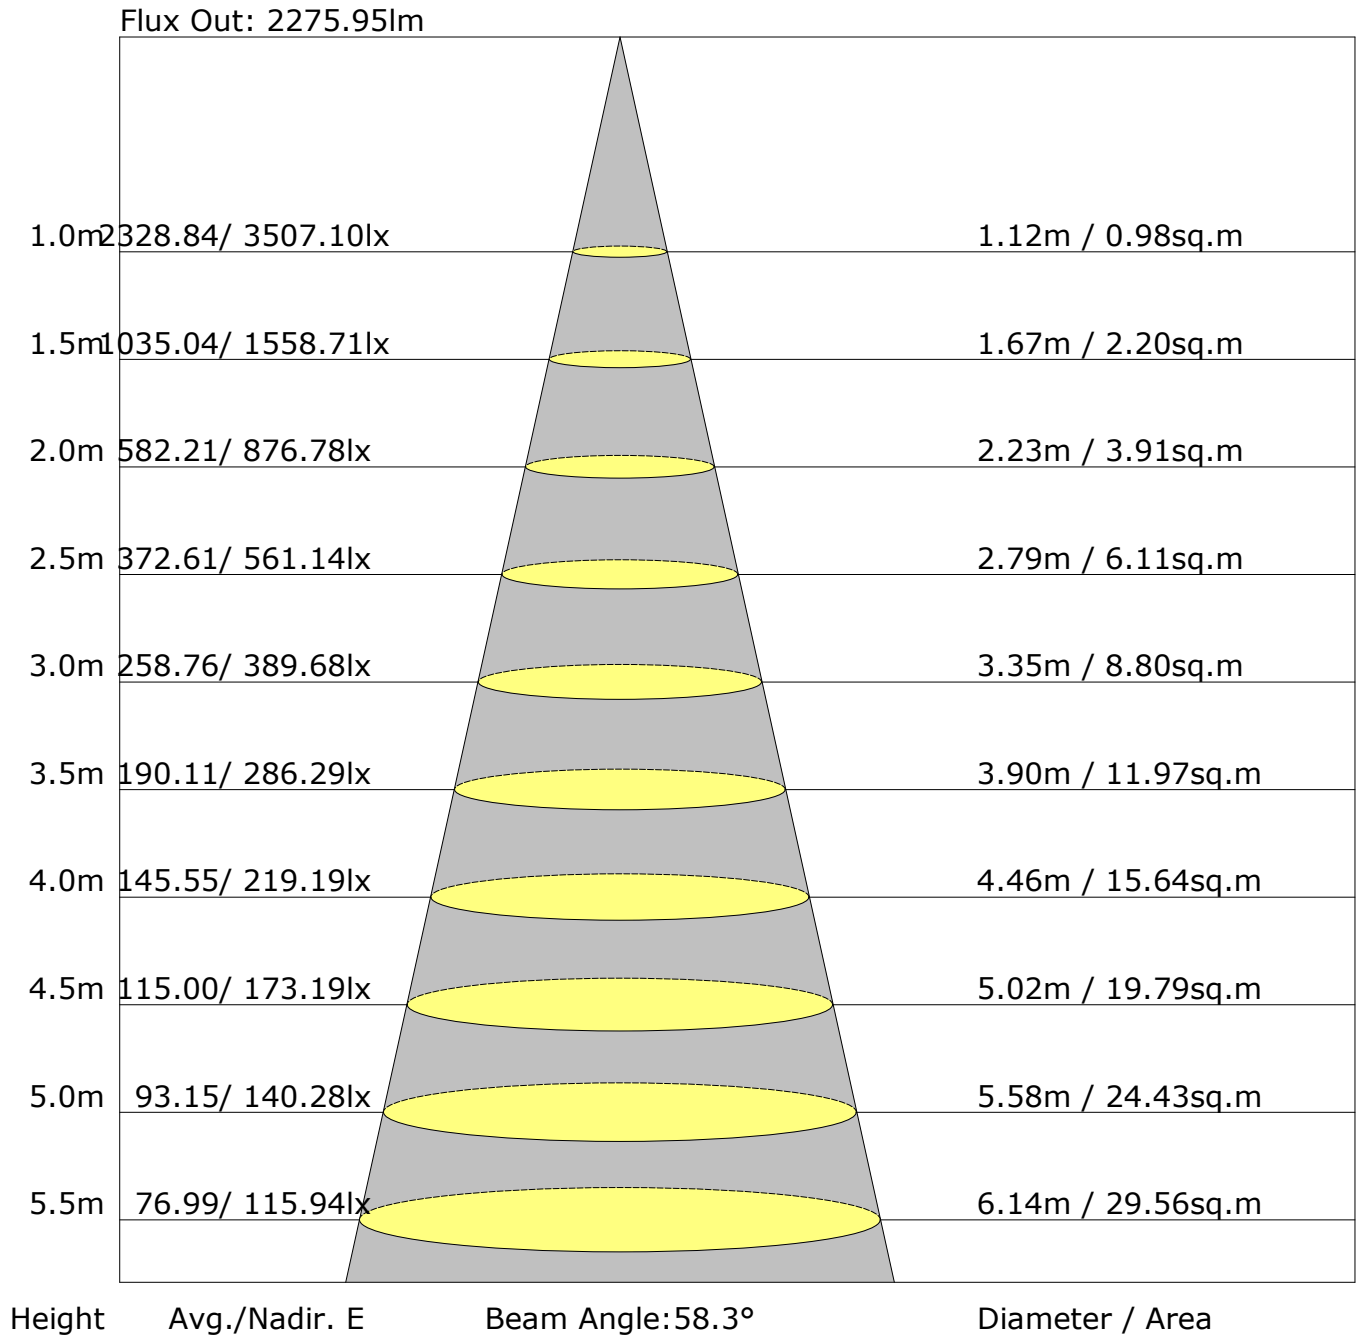

## UGR Table

Reflectance:										
Ceiling (cavity)	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
X=2H Y=2H	23.3	24.2	23.6	24.4	24.6	23.4	24.2	23.6	24.4	24.6
3H	23.2	24.0	23.5	24.3	24.5	23.3	24.1	23.6	24.3	24.5
4H	23.2	23.9	23.5	24.2	24.4	23.2	23.9	23.5	24.2	24.5
6H	23.1	23.8	23.4	24.1	24.4	23.1	23.8	23.5	24.1	24.4
8H	23.1	23.7	23.4	24.0	24.3	23.1	23.8	23.5	24.0	24.4
12H	23.0	23.6	23.4	24.0	24.3	23.1	23.7	23.4	24.0	24.3
X=4H Y=2H	23.2	23.9	23.5	24.2	24.4	23.2	24.0	23.6	24.2	24.5
3H	23.1	23.7	23.5	24.0	24.4	23.2	23.8	23.5	24.1	24.4
4H	23.0	23.6	23.4	23.9	24.3	23.1	23.6	23.5	24.0	24.3
6H	23.0	23.5	23.4	23.8	24.2	23.0	23.5	23.4	23.9	24.2
8H	22.9	23.4	23.4	23.8	24.2	23.0	23.4	23.4	23.8	24.2
12H	22.9	23.3	23.3	23.7	24.1	22.9	23.3	23.4	23.7	24.2
X=8H Y=4H	22.9	23.4	23.4	23.8	24.2	23.0	23.4	23.4	23.8	24.2
6H	22.9	23.2	23.3	23.6	24.1	22.9	23.2	23.3	23.7	24.1
8H	22.8	23.1	23.3	23.6	24.0	22.8	23.2	23.3	23.6	24.1
12H	22.8	23.0	23.3	23.5	24.0	22.8	23.1	23.3	23.5	24.0
X=12H Y=4H	22.9	23.3	23.3	23.7	24.1	22.9	23.3	23.4	23.7	24.2
6H	22.8	23.1	23.3	23.6	24.0	22.8	23.2	23.3	23.6	24.1
8H	22.8	23.0	23.3	23.5	24.0	22.8	23.1	23.3	23.5	24.0
Variations with the observer position at spacings:										
S=1.0H	+4.7/-5.8					+4.8/-6.1				
S=1.5H	+7.4/-7.2					+7.4/-7.7				
S=2.0H	+9.3/-11.0					+9.4/-11.7				

Calculate in accordance with CIE Pub.117. The table is revised with  $3127\text{lm}$  ( $8\log(F/F_0) = 4.0$ ).

C Plane (°):0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°):0.0-90.0:1.0  
Test Device: CHL-6E  
Distance: 2.905 m  
Humidity:  
Inspector:

**FLUX DISTRIBUTION TABLE BASED ON THE IESNA LUMINAIRE CLASSIFICATION SYSTEM**

	ZONE	LUMENS	% LAMP LUMENS
	FORWARD LIGHT	1561	49.9
	FL ( 0°-30°)	1175	37.6
	FM (30°-60°)	370	11.8
	FH (60°-80°)	14	0.4
	FVH (80°-90°)	1	0.0
	BACK LIGHT	1567	50.1
	BL ( 0°-30°)	1178	37.7
	BM (30°-60°)	376	12.0
	BH (60°-80°)	12	0.4
	BVH (80°-90°)	0	0.0
	UP LIGHT	0	0.0
	UL (90°-100°)	0	0.0
	UH (100°-180°)	0	0.0
	TRAPPED LIGHT	NA	NA

BUG(Backlight,Uplight,Glare) Rating Base On TM-15-07	
Asymmetrical Luminaire Types (Type I,II,III,IV)	B3 U0 G0
Quadrilateral Symmetrical Luminaire Types (Type V,Area Light)	B3 U0 G0

C Plane (°):0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°):0.0-90.0:1.0  
Test Device: CHL-6E  
Distance: 2.905 m  
Humidity:  
Inspector:

## Zonal Lumen

Gamma [°]	I <sub>mean</sub> [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
0.0-1.0	3507.0	3.4	3.4	0.11	0.11
1.0-2.0	3507.3	10.1	13.4	0.32	0.43
2.0-3.0	3509.0	16.8	30.2	0.54	0.97
3.0-4.0	3511.9	23.5	53.7	0.75	1.72
4.0-5.0	3515.7	30.2	84.0	0.97	2.69
5.0-6.0	3519.3	37.0	121.0	1.18	3.87
6.0-7.0	3520.9	43.7	164.7	1.40	5.27
7.0-8.0	3521.0	50.4	215.1	1.61	6.88
8.0-9.0	3517.5	57.0	272.1	1.82	8.70
9.0-10.0	3509.2	63.5	335.6	2.03	10.73
10.0-11.0	3495.8	69.9	405.5	2.23	12.97
11.0-12.0	3476.3	76.0	481.5	2.43	15.40
12.0-13.0	3451.1	81.9	563.4	2.62	18.01
13.0-14.0	3419.8	87.5	650.9	2.80	20.81
14.0-15.0	3380.9	92.8	743.7	2.97	23.78
15.0-16.0	3333.0	97.7	841.4	3.12	26.91
16.0-17.0	3275.5	102.0	943.4	3.26	30.17
17.0-18.0	3209.3	105.8	1049.3	3.38	33.55
18.0-19.0	3134.5	109.1	1158.3	3.49	37.04
19.0-20.0	3050.5	111.7	1270.0	3.57	40.61
20.0-21.0	2958.1	113.6	1383.6	3.63	44.24
21.0-22.0	2856.4	114.8	1498.4	3.67	47.91
22.0-23.0	2744.8	115.2	1613.6	3.68	51.60
23.0-24.0	2623.8	114.7	1728.3	3.67	55.27
24.0-25.0	2493.0	113.4	1841.7	3.63	58.89
25.0-26.0	2351.9	111.0	1952.7	3.55	62.44
26.0-27.0	2200.7	107.7	2060.4	3.44	65.89
27.0-28.0	2040.8	103.3	2163.7	3.30	69.19
28.0-29.0	1872.6	98.0	2261.7	3.13	72.32
29.0-30.0	1699.4	91.8	2353.5	2.93	75.26
30.0-31.0	1525.7	84.9	2438.4	2.72	77.97
31.0-32.0	1354.1	77.6	2516.0	2.48	80.45
32.0-33.0	1189.1	70.1	2586.1	2.24	82.69
33.0-34.0	1034.6	62.6	2648.7	2.00	84.70
34.0-35.0	891.7	55.4	2704.1	1.77	86.47
35.0-36.0	762.6	48.6	2752.6	1.55	88.02

C Plane (°):0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°):0.0-90.0:1.0  
Test Device: CHL-6E  
Distance: 2.905 m  
Humidity:  
Inspector:

## Zonal Lumen (Continue 1)

Gamma [°]	I <sub>mean</sub> [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
36.0-37.0	649.3	42.4	2795.0	1.35	89.37
37.0-38.0	550.9	36.8	2831.8	1.18	90.55
38.0-39.0	466.7	31.9	2863.6	1.02	91.57
39.0-40.0	396.0	27.6	2891.2	0.88	92.45
40.0-41.0	337.2	24.0	2915.3	0.77	93.22
41.0-42.0	289.2	21.0	2936.3	0.67	93.89
42.0-43.0	250.4	18.6	2954.8	0.59	94.49
43.0-44.0	218.9	16.5	2971.3	0.53	95.01
44.0-45.0	193.1	14.8	2986.2	0.47	95.49
45.0-46.0	171.6	13.4	2999.6	0.43	95.92
46.0-47.0	153.2	12.2	3011.8	0.39	96.31
47.0-48.0	137.3	11.1	3022.9	0.35	96.66
48.0-49.0	123.1	10.1	3033.0	0.32	96.99
49.0-50.0	110.0	9.2	3042.2	0.29	97.28
50.0-51.0	97.7	8.3	3050.4	0.26	97.54
51.0-52.0	86.4	7.4	3057.9	0.24	97.78
52.0-53.0	77.0	6.7	3064.6	0.21	97.99
53.0-54.0	70.0	6.2	3070.7	0.20	98.19
54.0-55.0	64.5	5.8	3076.5	0.18	98.38
55.0-56.0	59.6	5.4	3081.9	0.17	98.55
56.0-57.0	54.9	5.0	3086.9	0.16	98.71
57.0-58.0	50.5	4.7	3091.6	0.15	98.86
58.0-59.0	46.3	4.3	3095.9	0.14	99.00
59.0-60.0	42.1	4.0	3099.9	0.13	99.12
60.0-61.0	38.3	3.7	3103.5	0.12	99.24
61.0-62.0	34.8	3.4	3106.9	0.11	99.35
62.0-63.0	31.4	3.1	3109.9	0.10	99.45
63.0-64.0	28.1	2.8	3112.7	0.09	99.53
64.0-65.0	24.4	2.4	3115.1	0.08	99.61
65.0-66.0	20.3	2.0	3117.1	0.06	99.68
66.0-67.0	16.3	1.6	3118.8	0.05	99.73
67.0-68.0	12.9	1.3	3120.1	0.04	99.77
68.0-69.0	10.0	1.0	3121.1	0.03	99.80
69.0-70.0	7.7	0.8	3121.9	0.03	99.83
70.0-71.0	6.5	0.7	3122.5	0.02	99.85
71.0-72.0	5.9	0.6	3123.2	0.02	99.87

C Plane (°):0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°):0.0-90.0:1.0  
Test Device: CHL-6E  
Distance: 2.905 m  
Humidity:  
Inspector:

Gamma Plane (°):0.0-90.0:1.0  
Test Device: CHL-6E  
Distance: 2.905 m  
Humidity:  
Inspector:

## Candlepower Table

Unit: cd

G\C	C0.0	C180.0								
G0.0	3507.1	3507.1								
G1.0	3507.7	3506.3								
G2.0	3509.8	3505.4								
G3.0	3513.7	3507.1								
G4.0	3517.4	3509.2								
G5.0	3520.4	3515.9								
G6.0	3520.9	3520.1								
G7.0	3521.4	3521.2								
G8.0	3520.8	3520.7								
G9.0	3516.3	3512.3								
G10.0	3506.8	3501.4								
G11.0	3491.2	3483.8								
G12.0	3470.5	3459.8								
G13.0	3443.5	3430.6								
G14.0	3409.5	3395.6								
G15.0	3367.1	3351.2								
G16.0	3316.1	3297.5								
G17.0	3253.3	3235.4								
G18.0	3179.9	3168.8								
G19.0	3097.4	3092.2								
G20.0	3006.0	3006.6								
G21.0	2905.8	2914.1								
G22.0	2794.0	2811.6								
G23.0	2675.3	2698.1								
G24.0	2545.8	2575.9								
G25.0	2409.0	2441.3								
G26.0	2261.5	2295.9								
G27.0	2104.9	2140.6								
G28.0	1940.7	1977.0								
G29.0	1766.0	1806.8								
G30.0	1588.3	1636.5								
G31.0	1412.0	1465.9								
G32.0	1240.6	1298.1								
G33.0	1080.3	1137.4								
G34.0	933.9	986.8								
G35.0	799.7	846.4								
G36.0	682.2	722.0								

C Plane (°):0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°):0.0-90.0:1.0  
Test Device: CHL-6E  
Distance: 2.905 m  
Humidity:  
Inspector:

## Candlepower Table (Continue 1)

Unit: cd

G\C	C0.0	C180.0								
G37.0	580.7	612.4								
G38.0	493.1	517.3								
G39.0	418.6	437.7								
G40.0	356.3	371.4								
G41.0	304.7	316.5								
G42.0	262.8	272.7								
G43.0	229.2	236.9								
G44.0	201.7	207.9								
G45.0	179.1	183.5								
G46.0	160.4	163.2								
G47.0	144.3	145.0								
G48.0	130.6	129.2								
G49.0	117.8	114.8								
G50.0	106.7	100.8								
G51.0	96.5	86.8								
G52.0	86.2	76.1								
G53.0	75.9	69.8								
G54.0	69.4	64.8								
G55.0	63.8	60.1								
G56.0	59.3	55.1								
G57.0	55.0	50.3								
G58.0	51.0	45.6								
G59.0	47.0	41.4								
G60.0	43.1	37.1								
G61.0	39.4	33.6								
G62.0	35.9	30.2								
G63.0	32.7	26.9								
G64.0	29.4	23.4								
G65.0	25.7	19.0								
G66.0	21.8	14.5								
G67.0	17.2	11.5								
G68.0	14.0	8.8								
G69.0	10.8	6.4								
G70.0	8.1	5.6								
G71.0	7.3	5.0								
G72.0	6.8	4.5								
G73.0	6.2	3.9								

C Plane (°):0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°):0.0-90.0:1.0  
Test Device: CHL-6E  
Distance: 2.905 m  
Humidity:  
Inspector:



Unit: cd

[illegible]

Inspector: