



52.07529 FLEXI Recessed Downlight



IP20

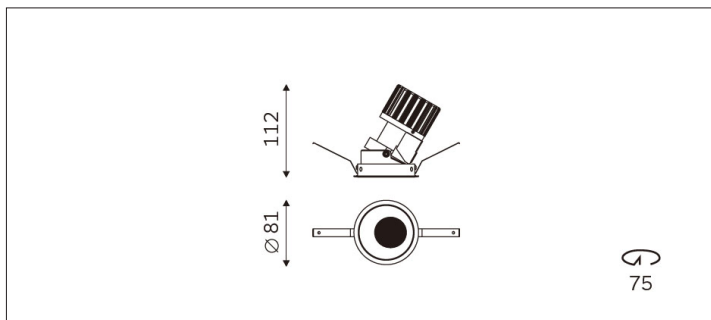

Light Distribution	FLEXI Recessed Downlight
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	Lens
Beam Angle	19D/29D/40D/50D
Cut Out	75mm
Connected Load	15W
Luminous Flux Of The Luminaire	1528lm
Luminaire Efficacy	103lm/W
Colour Deviation	SDCM < 5
Light Source	LED
LED Type	COB
Dimming Method	Triac/0-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Sandy White/ Sandy Black
Weight	0.4Kg
Technical Region	220-240V 50/60Hz

Light Beam Table

H(m)	E(lx)	D(m)
		19°
1.0	7802.31	0.33
2.0	1950.58	0.66
3.0	866.92	0.99
4.0	487.64	1.31
5.0	312.09	1.64