



51.07525 FLEXI Recessed Downlight



IP20

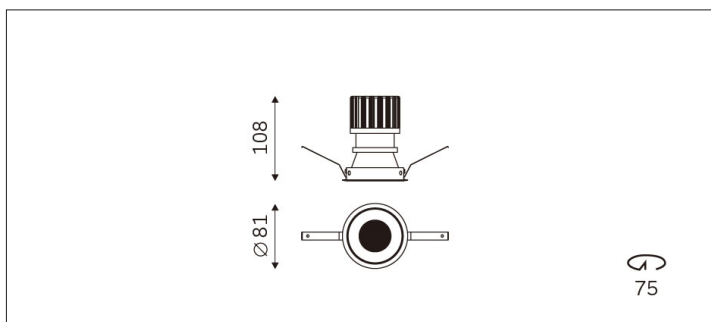

Light Distribution	FLEXI Recessed Downlight
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	Lens
Beam Angle	19D/29D/40D/50D
Cut Out	75mm
Connected Load	15W
Luminous Flux Of The Luminaire	1547lm
Luminaire Efficacy	103lm/W
Colour Deviation	SDCM < 5
Light Source	LED
LED Type	COB
Dimming Method	Triac/0-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Sandy White/ Sandy Black
Weight	0.3Kg
Technical Region	220-240V 50/60Hz

Light Beam Table

H(m)	E(lx)	D(m)
		19°
1.0	8658.93	0.34
2.0	2164.73	0.67
3.0	962.10	1.01
4.0	541.18	1.35
5.0	346.36	1.68

This recessed LED downlight is perfect for accent lighting in showrooms, galleries, museums, brand display areas, and designer studios. Available in multiple beam angles and color temperatures (2700K/3000K/4000K), it provides precise lighting control to enhance the display effect and highlight featured areas.