




94.09312 COVIA Surface Mounted Light

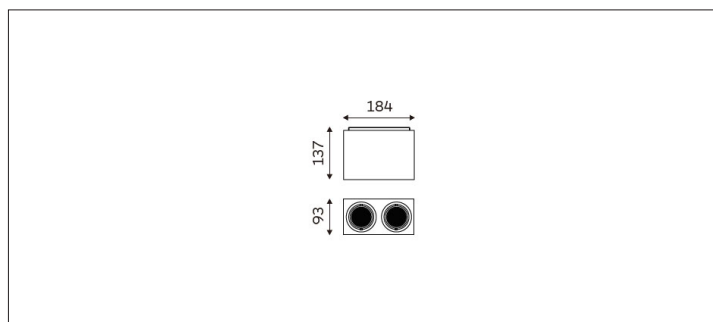

IP20



Light Distribution	Covia Surface Mounted Light
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	Lens
Beam Angle	17D/23D/39D/52D
Installation method	Surface Mounted
Connected Load	14W*2
Luminous Flux Of The Luminaire	2*1719lm
Luminaire Efficacy	122m/W
Colour Deviation	SDCM<5
Light Source	LED
LED Type	COB
Dimming Method	Triac/0-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Sandy White/ Sandy Black
Weight	1.2Kg
Technical Region	220-240V 50/60Hz

Light Beam Table

H(m)	E(lx)	D(m)
		23°
1.0	6621.29	0.40
2.0	1655.32	0.79
3.0	735.70	1.19
4.0	413.83	1.58
5.0	264.85	1.98

Suitable for commercial spaces, such as clothing boutiques, furniture stores, brand display shops, automotive showrooms, jewelry counters, star-rated hotels, premium clubs, museums, chain retail stores, brand exhibition halls, professional showcases, cashier counters, and other accent lighting applications.