

Report No.: 51.05516 SLIM Downlight

Test Time: 2023-10-06 15:01

Luminaire Property

Luminaire Category: Bridgelux V6HD 3000K CRI90

Voltage: 216.4

Current: 0.122 A

V Power: 14.8 W

Power Factor: 0.539

Photometric Results

CIE Class: Direct

Measurement Flux: 1053 lm

Downward Ratio: 100%

Horizontal Diffuse Angle(50%): H25.1

Vertical Diffuse Angle(50%): V25.1

Luminaire Efficacy Rating (LER): 73

Max. Intensity: 5027.62 cd

Total Rated Lamp Lumens: 1053

lm Efficiency: 100%

Upward Ratio: 0%


Central Intensity: 5027.62 cd

Pos of Max. Intensity: H0 V0

Picture Of Luminaire



Luminous Intensity Distribution Curve

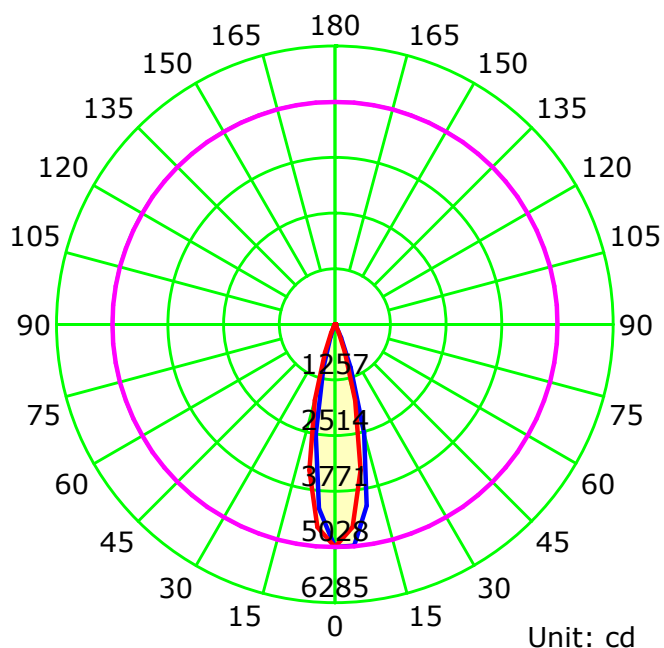

— C0-C180 — C90-C270 — G0

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:


Luminous Intensity Distribution Curve

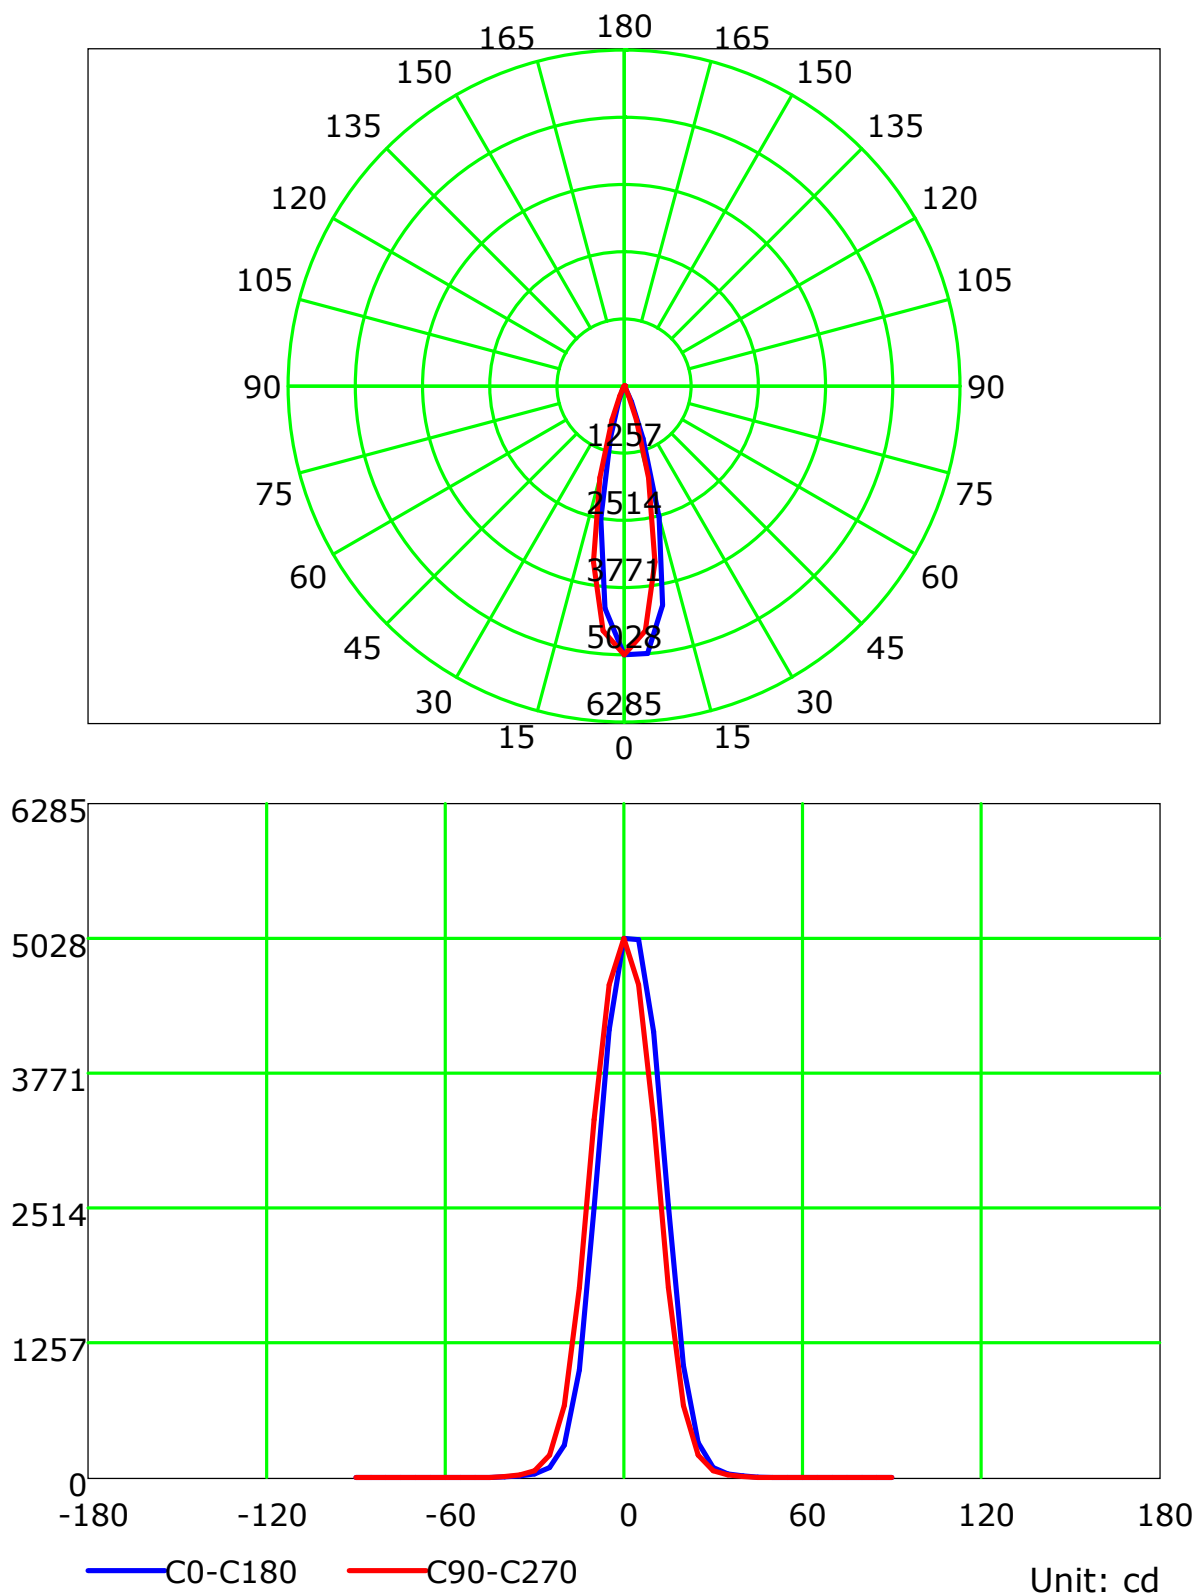

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

Isocandela (rectangle)

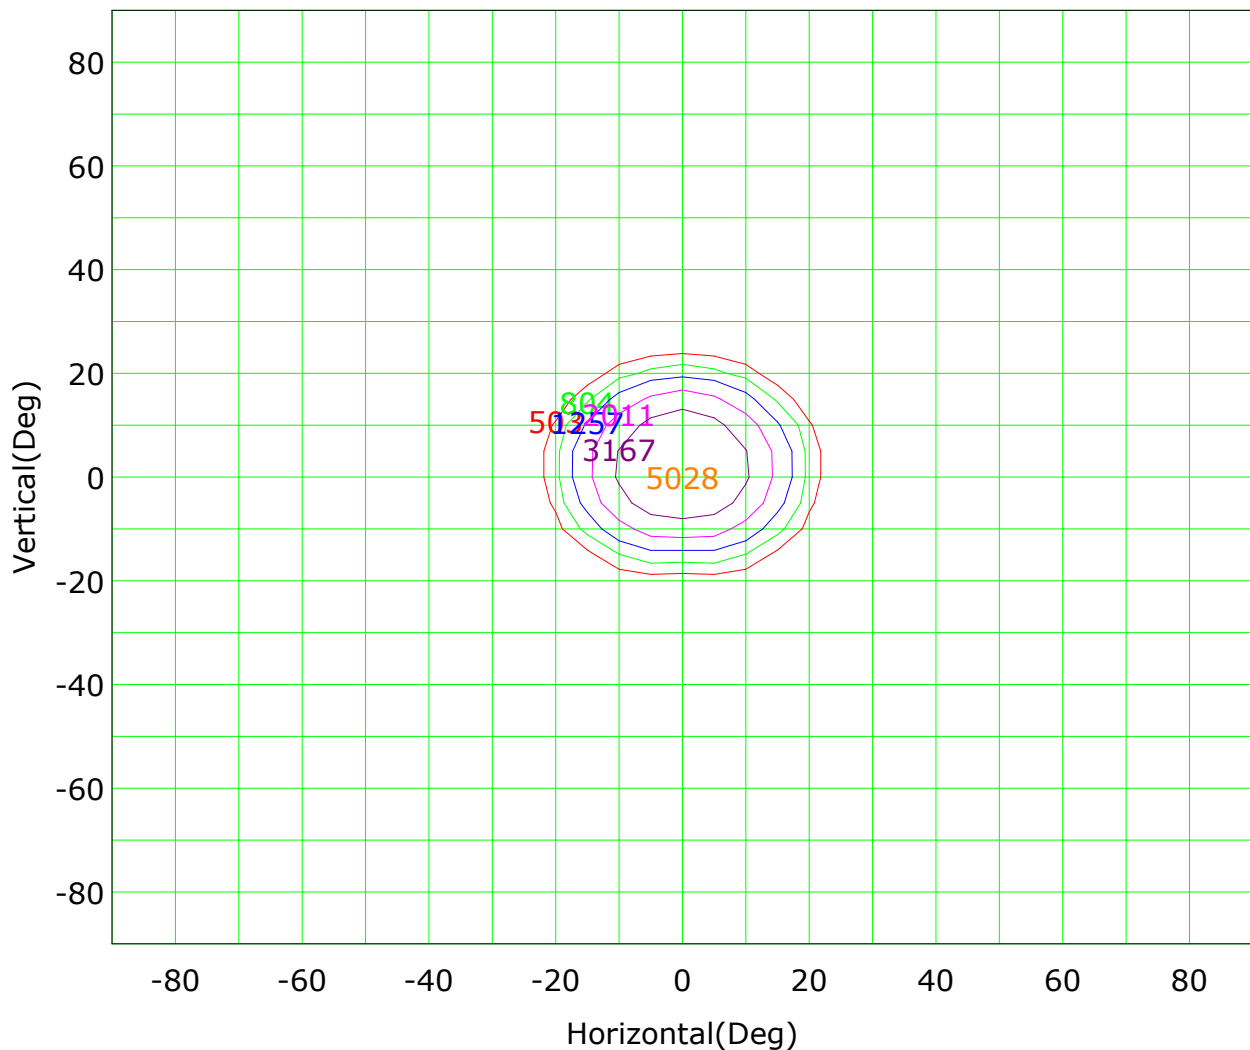

Imax (100%): 5028 cd

(10%): 503 cd	(16%): 804 cd
(25%): 1257 cd	(40%): 2011 cd
(63%): 3167 cd	(100%): 5028 cd

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:

IsoLux Plot

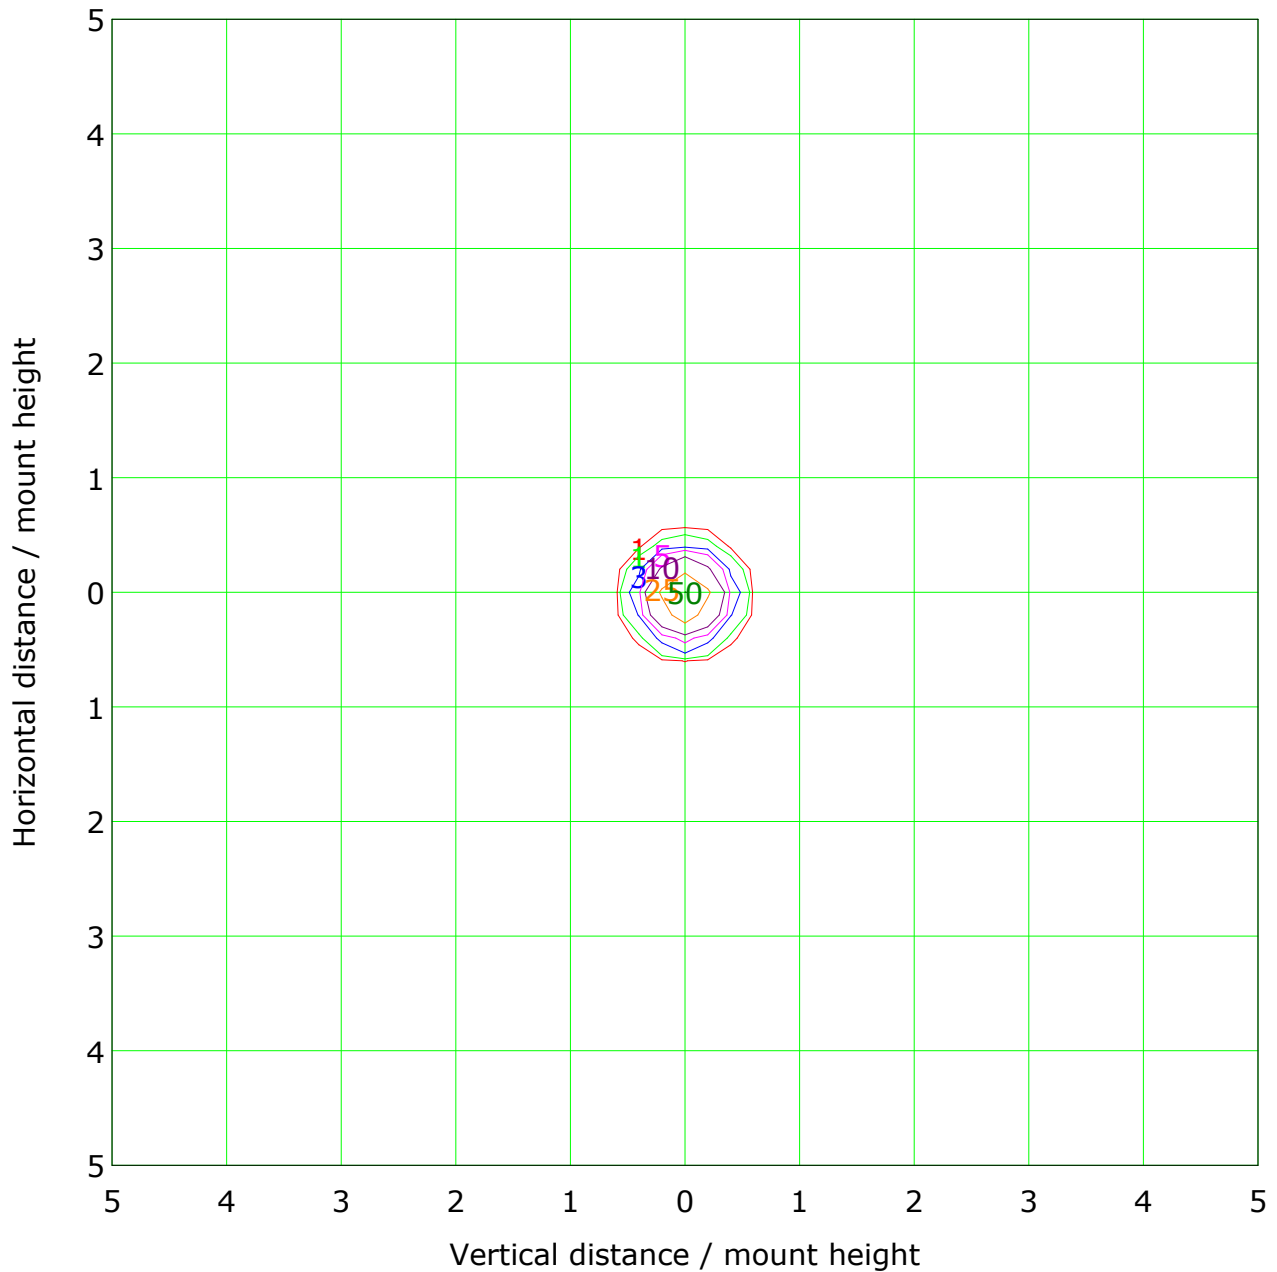


Mounting Height: 10m		Max Lux(100%): 50 lx	
(1%):	1 lx	(2%):	1 lx
(5%):	3 lx	(10%):	5 lx
(20%):	10 lx	(50%):	25 lx
(100%):	50 lx		


C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

Illuminance at a Distance

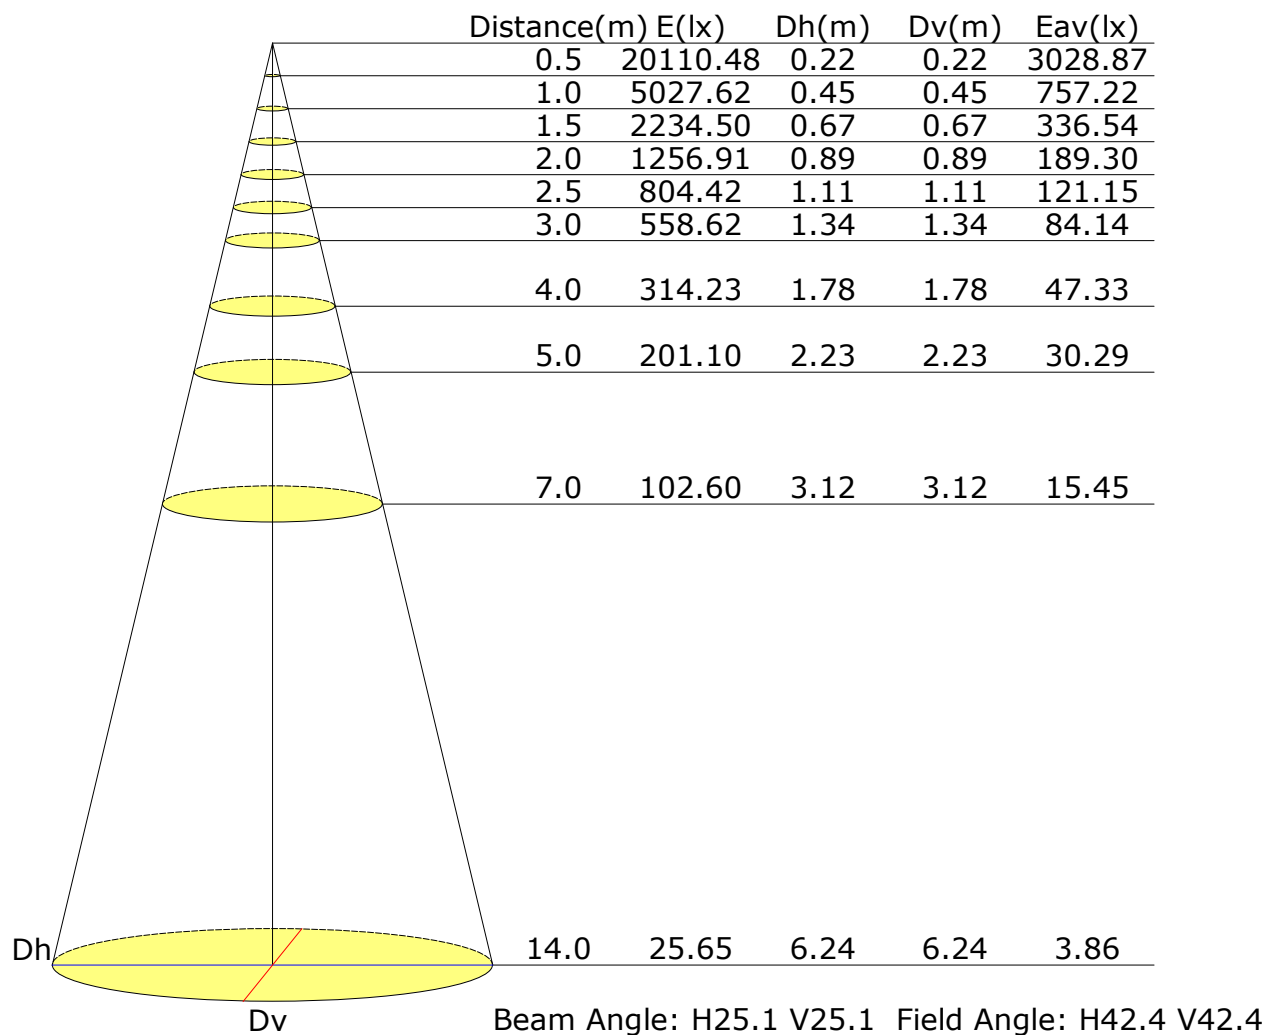

Vertical IsoLux Plot

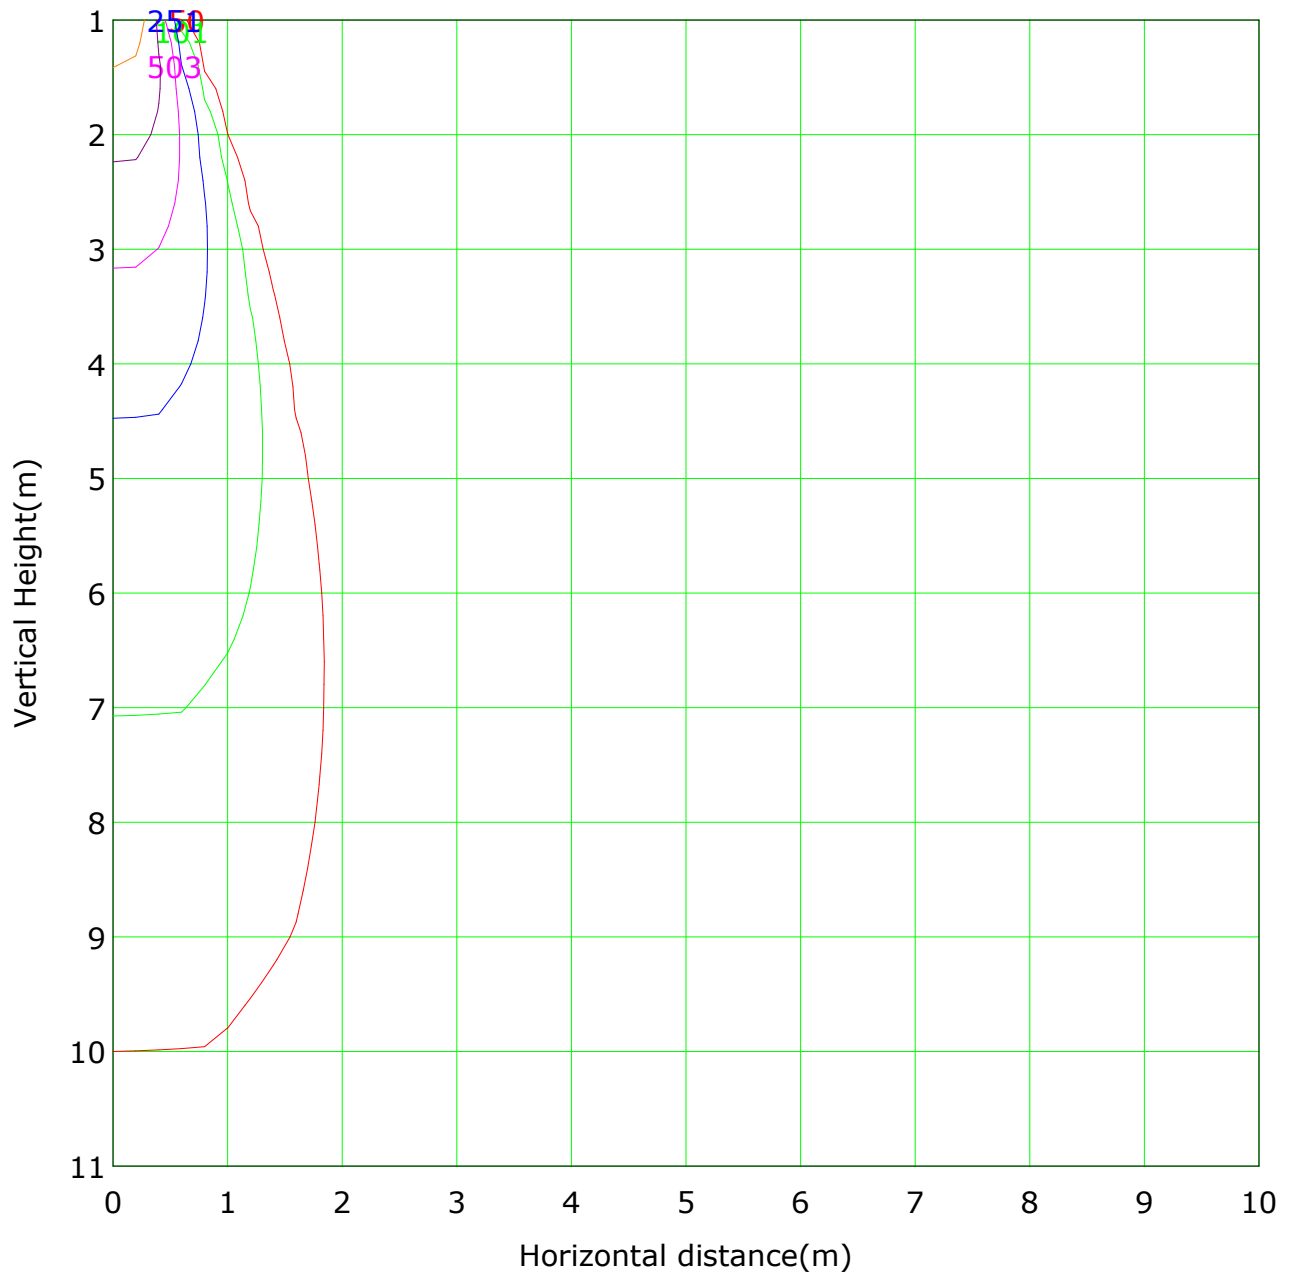


Lowest(m): 1m Highest(m): 11 Max Lux: 5028

(1%): 50 lx	(2%): 101 lx
(5%): 251 lx	(10%): 503 lx
(20%): 1006 lx	(50%): 2514 lx
(100%): 5028 lx	

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

The average illuminance effective figure

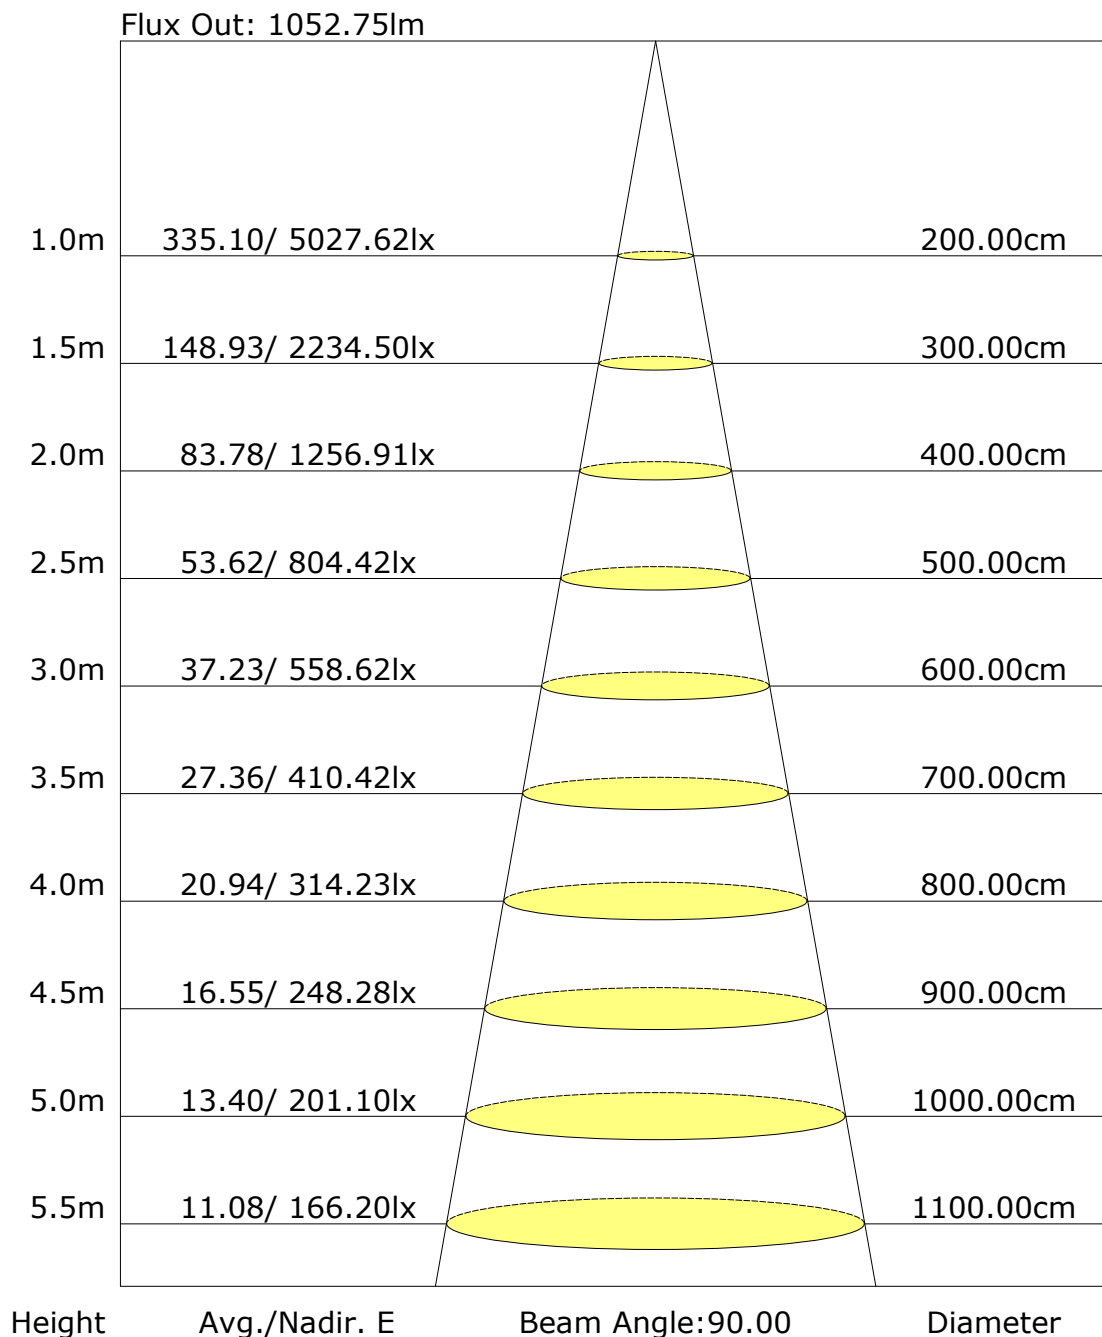

C Plane (°): 0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°): 0.0-90.0: 5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

Unit: cd

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector: