

Report No.: 81.15511 DELTA Pendant Lighting Test Time: 2023-09-28 14:24

Luminaire Property

Luminaire Category: Bridgelux V6 3000K CRI90

Voltage: 226.2 V

Current: 0.128 A

Power: 15.40 W

Power Factor: 0.531

Photometric Results

CIE Class: Direct

Measurement Flux: 455.3 lm

Downward Ratio: 100%

Horizontal Diffuse Angle(50%): H44.1

Vertical Diffuse Angle(50%): V44.1

Luminaire Efficacy Rating (LER): 30

Max. Intensity: 981.98 cd

Total Rated Lamp Lumens: 455.3 lm


Efficiency: 100%

Upward Ratio: 0%


Central Intensity: 981.98 cd

Pos of Max. Intensity: H0 V0

Picture Of Luminaire



Luminous Intensity Distribution Curve

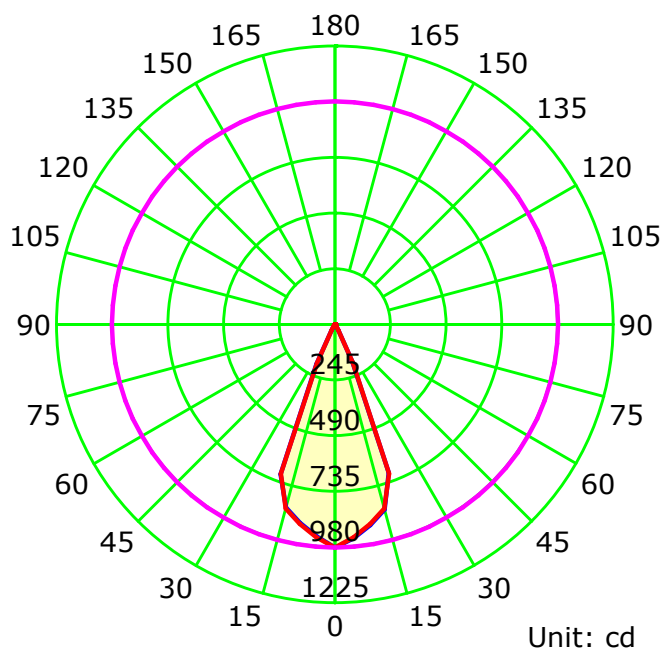

— C0-C180 — C90-C270 — G0

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0



Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:


Luminous Intensity Distribution Curve

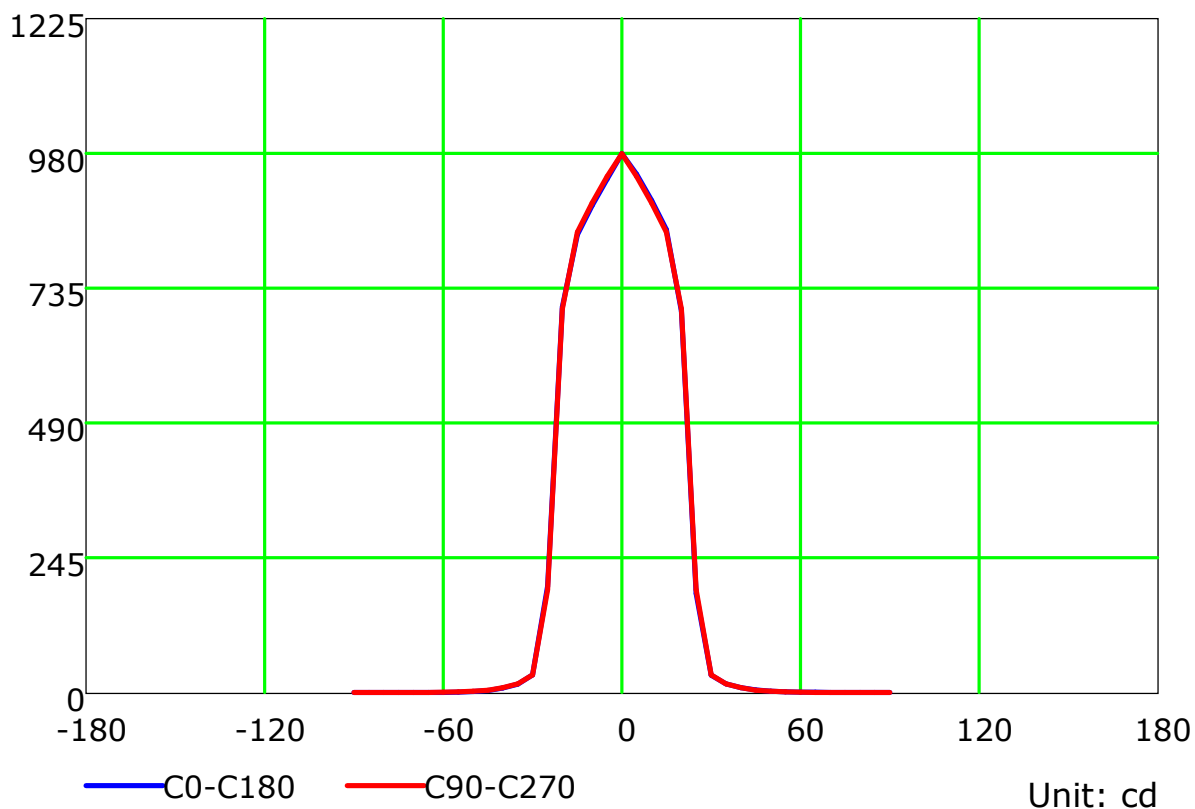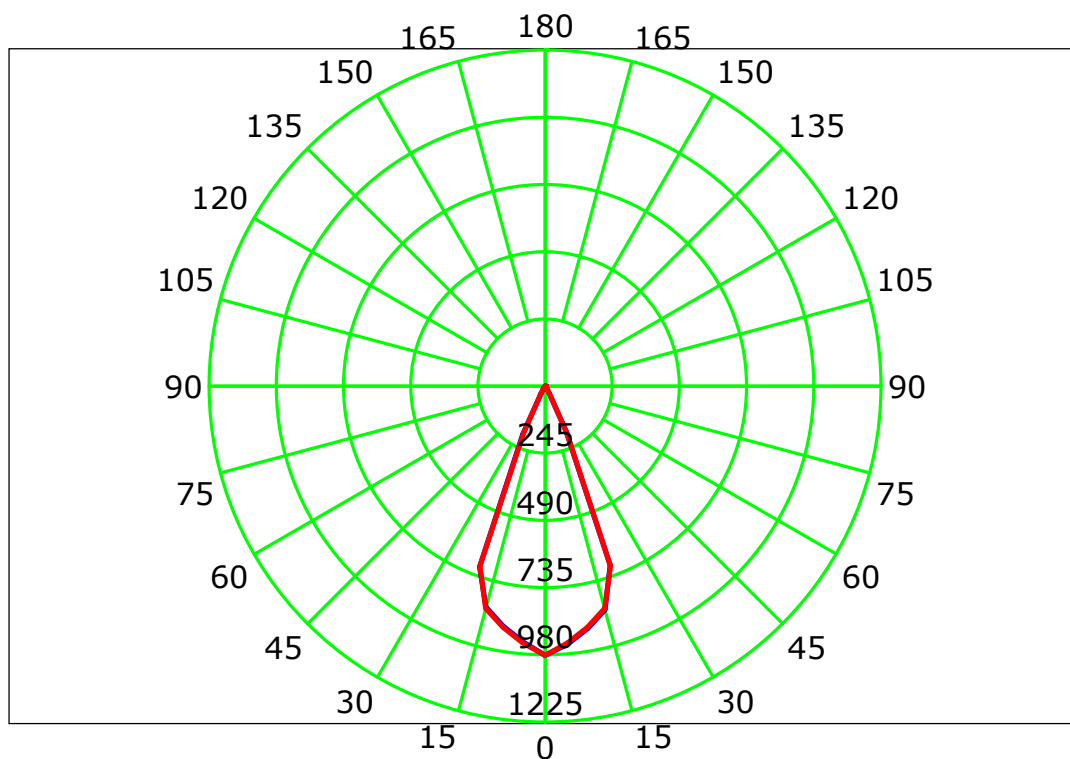

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

Isocandela (rectangle)

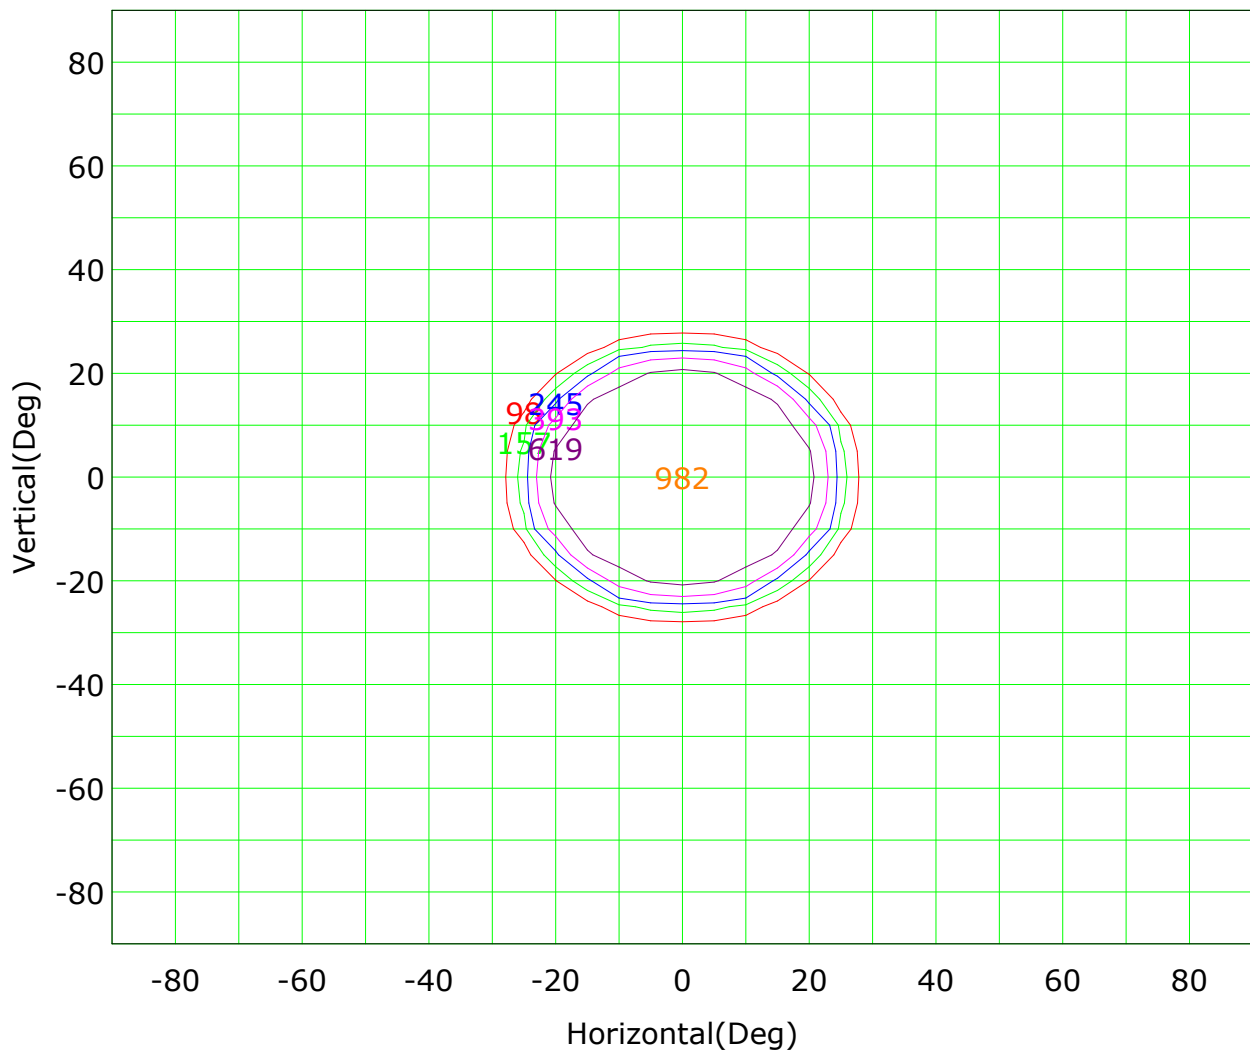

Imax (100%): 982 cd

(10%):	98 cd	(16%):	157 cd
(25%):	245 cd	(40%):	393 cd
(63%):	619 cd	(100%):	982 cd

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:

IsoLux Plot

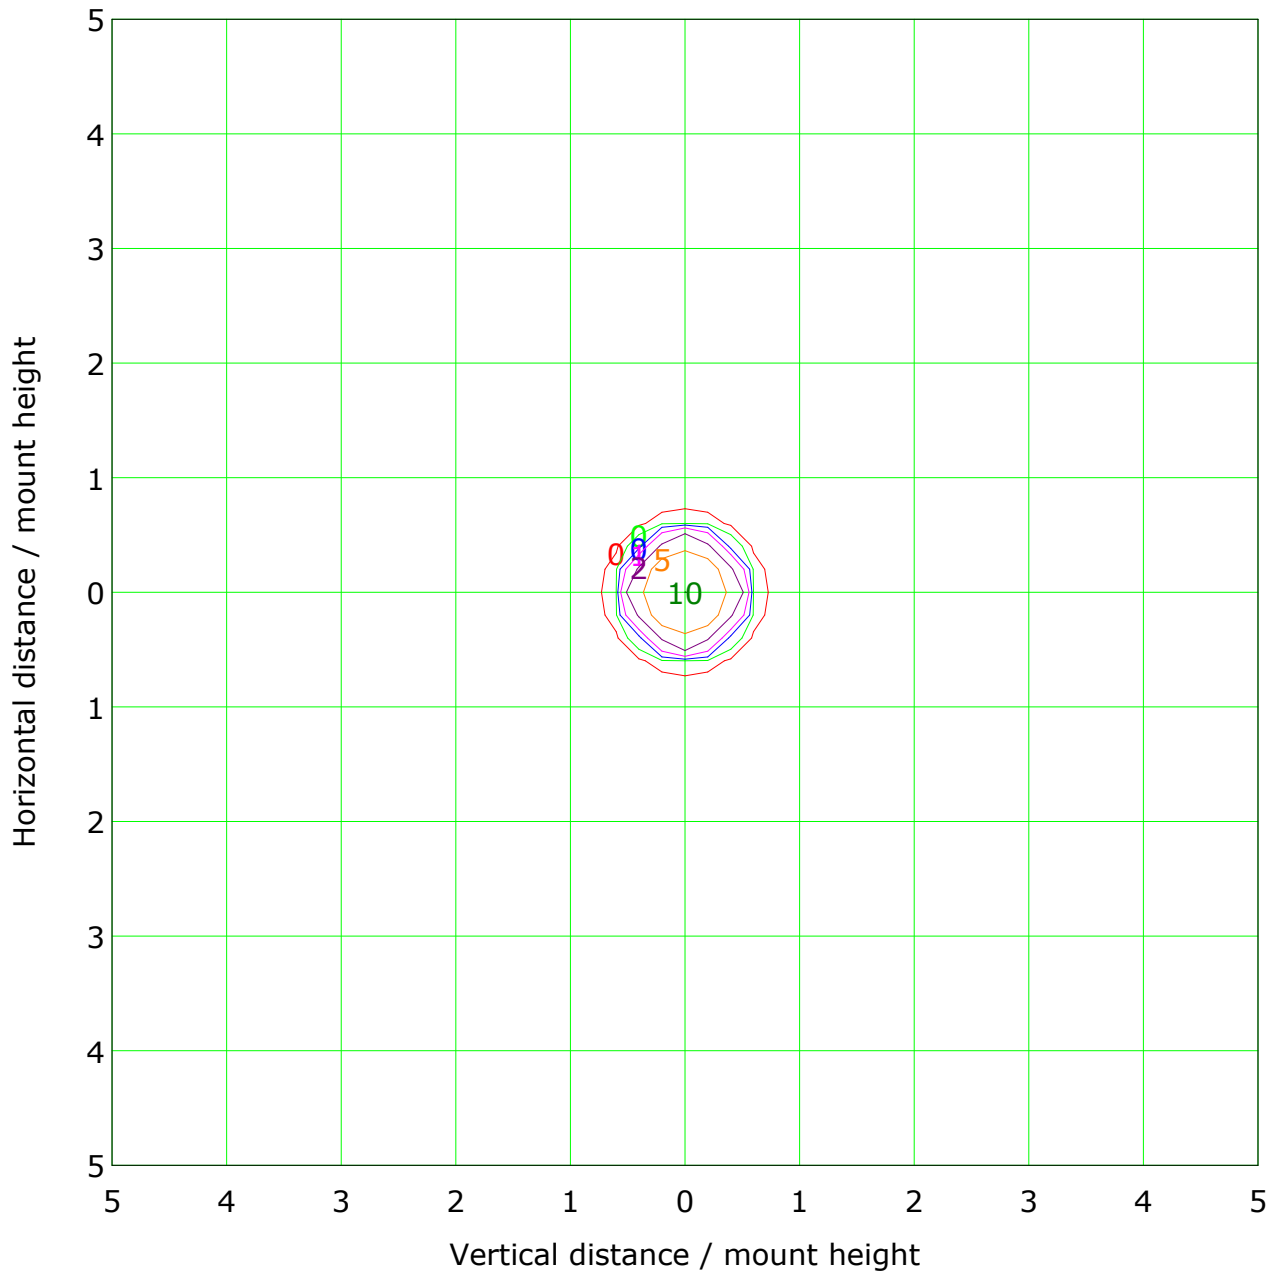


Mounting Height: 10m		Max Lux(100%): 10 lx	
(1%):	0 lx	(2%):	0 lx
(5%):	0 lx	(10%):	1 lx
(20%):	2 lx	(50%):	5 lx
(100%):	10 lx		


C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

Illuminance at a Distance

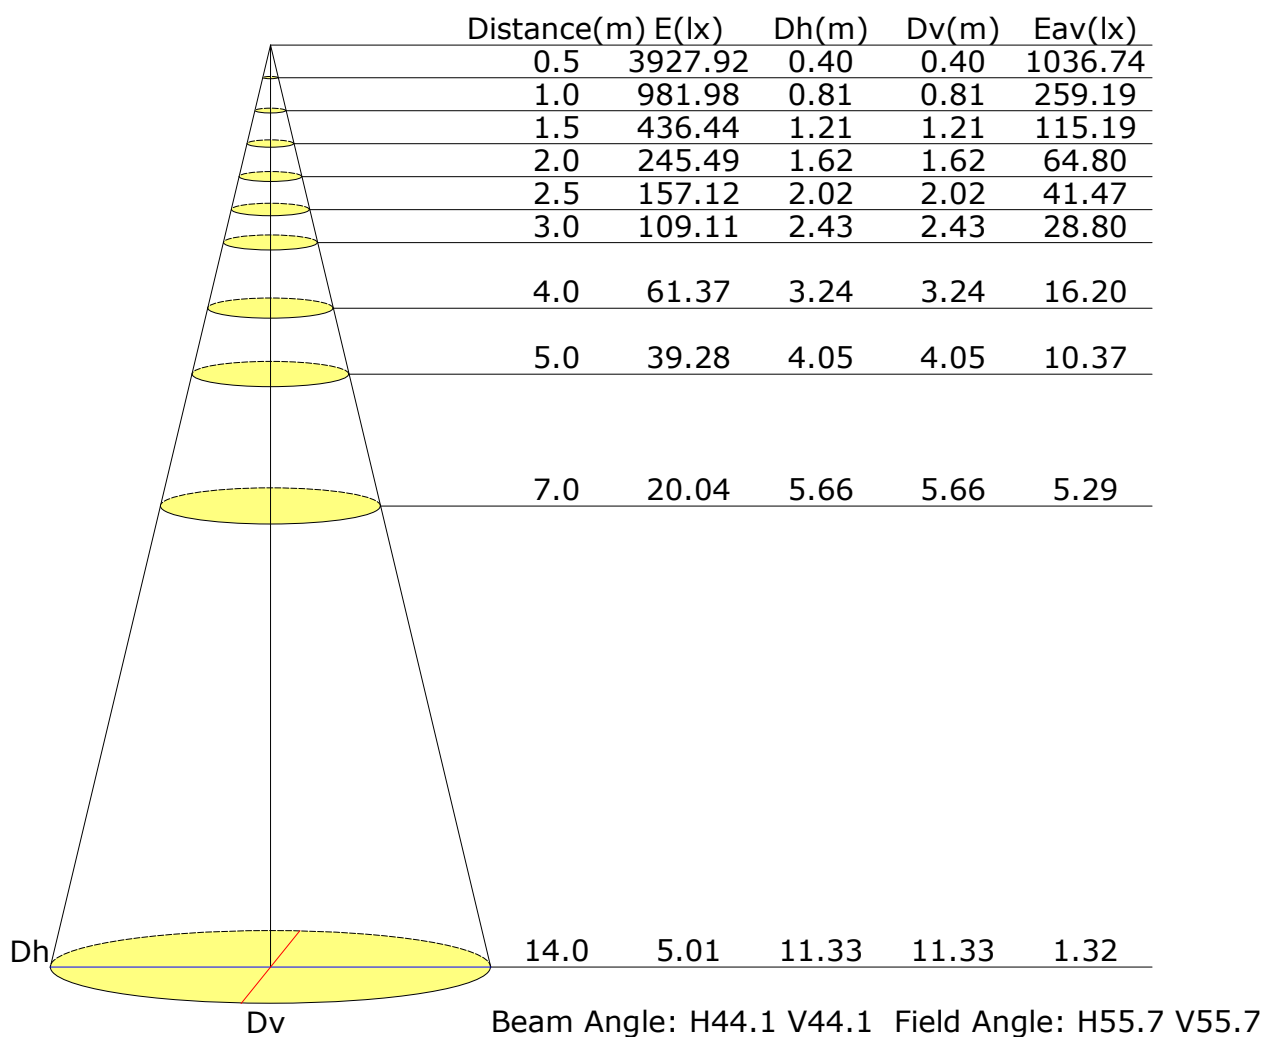

Vertical IsoLux Plot

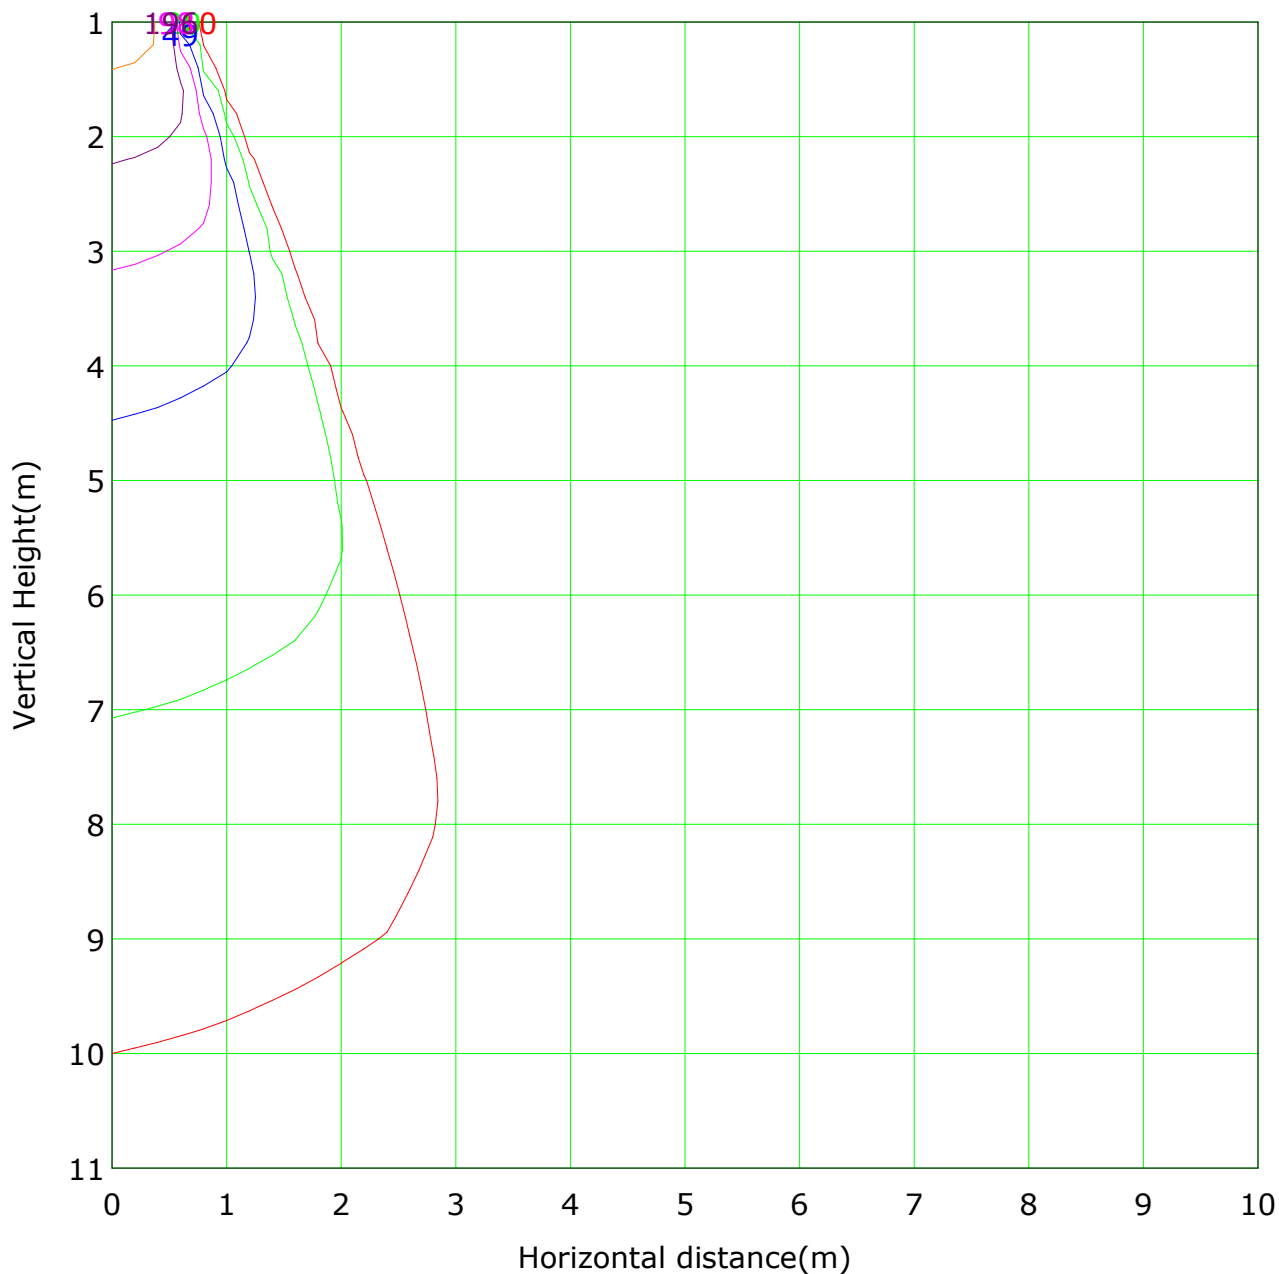


Lowest(m): 1m Highest(m): 11 Max Lux: 982

(1%): 10 lx	(2%): 20 lx
(5%): 49 lx	(10%): 98 lx
(20%): 196 lx	(50%): 491 lx
(100%): 982 lx	

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

The average illuminance effective figure

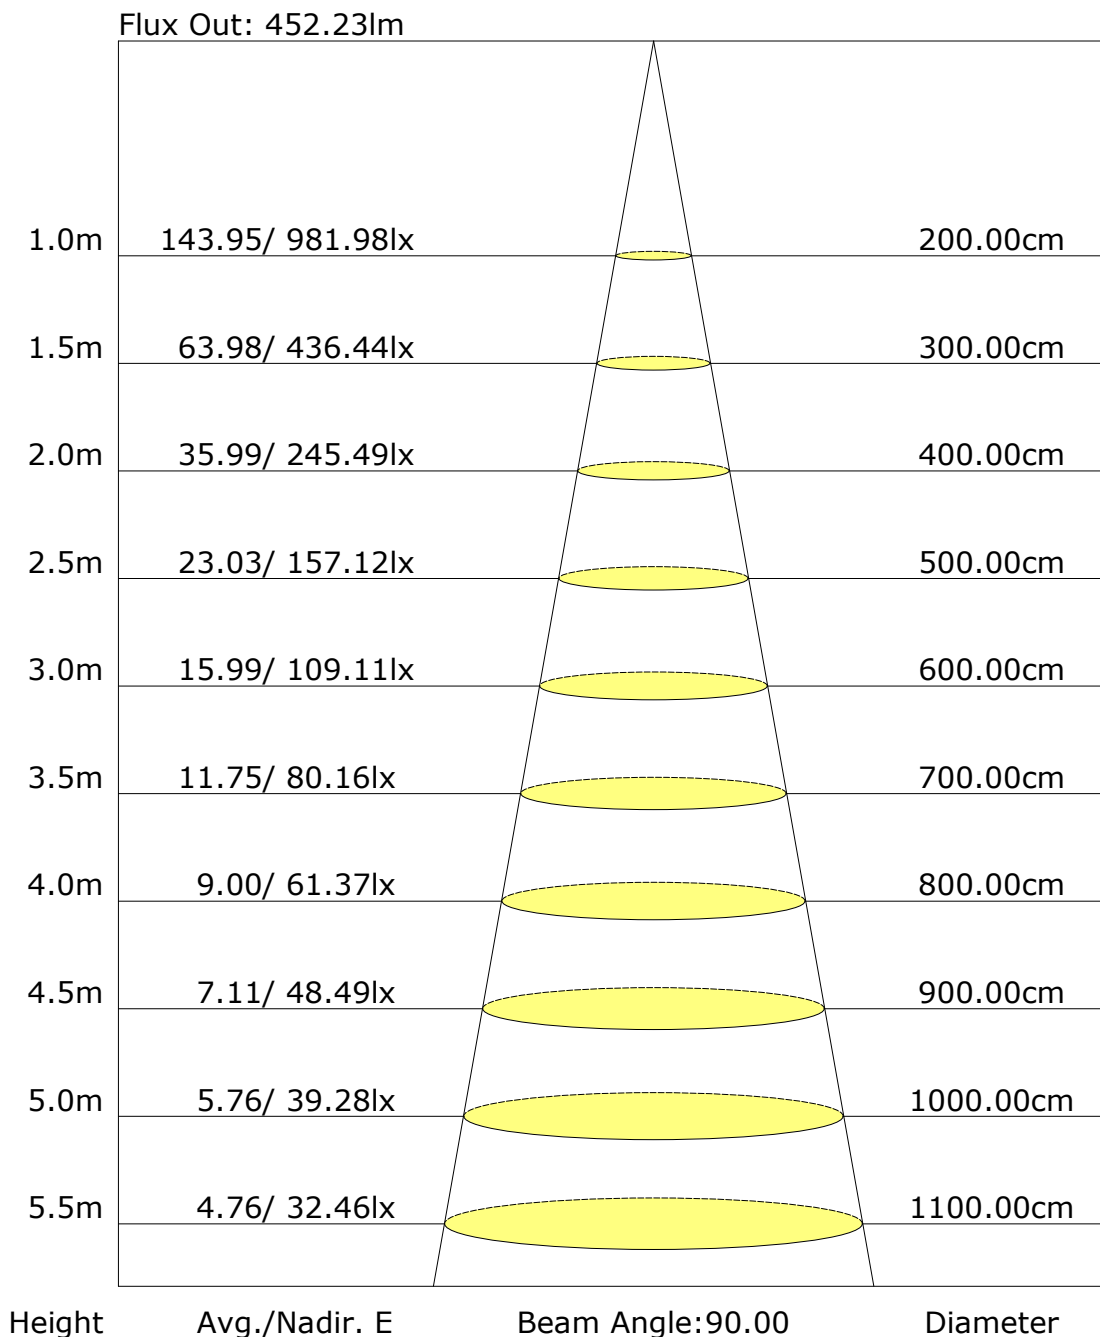

C Plane (°): 0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°): 0.0-90.0: 5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

Unit: cd

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector: