



## $51.09511\,\text{slim}$ fixed recessed downlight





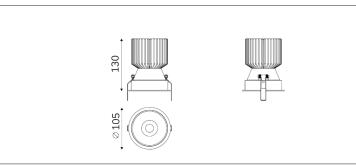



350°



| Light Distribution             | Slim Recessed Downlight  |  |
|--------------------------------|--------------------------|--|
| Colour Temperature             | 2700/3000/3500/4000K     |  |
| Colour Rendition Index         | CRI 90                   |  |
| Optics                         | LENS                     |  |
| Beam Angle                     | 26D/33D/42D/51D          |  |
| Cut out                        | 95mm                     |  |
| Connected Load                 | 36.5W                    |  |
| Luminous Flux Of The Luminaire | 4252lm                   |  |
| Luminaire Efficacy             | 116lm/W                  |  |
| Colour Deviation               | SDCM<5                   |  |
| Light Source                   | LED                      |  |
| LED Type                       | СОВ                      |  |
| Dimming Method                 | Triac/1-10V/ Dali        |  |
| Cover Material                 | Aluminum                 |  |
| Body Material                  | Aluminum                 |  |
| IP Rating                      | IP20                     |  |
| Housing Colour                 | Sandy White/ Sandy Black |  |
| Weight                         | 0.8Kg                    |  |
| Technical Region               | 220-240V 50/60Hz         |  |

| Light Bea | am Table |      |
|-----------|----------|------|
| H(M)      | E(lx)    | D(M) |
|           |          | 26°  |
| 1.0       | 15225    | 0.47 |
| 2.0       | 3806     | 0.93 |
| 3.0       | 2436     | 1.40 |
| 4.0       | 951      | 1.87 |
| 5.0       | 609      | 2.34 |
|           |          |      |

Small sizes but can be high Have fixed and adjustable 2 versions, each version have 4 sizes and 4 power for selected, can almost meet all the requirements. With anti-glare reflector, created a comfortable environment.