

Report No.:

Test Time: 2025-09-20 19:08

Luminaire Property

Luminaire Manufacturer:

Luminaire Description: 15D

Luminous Width (mm): -55

Current: 0.095 A

Power Factor: 0.613

Luminous Length (mm): -55

Voltage: 237.1 V

Power: 13.90 W

Photometric Results

CIE Class: Direct

Measurement Flux: 1159 lm

Downward Ratio: 100%

Horizontal Diffuse Angle(50%): H21.6

Vertical Diffuse Angle(50%): V21.6

Luminaire Efficacy Rating (LER): 83.43

Max. Intensity: 6299.71 cd

S/MH(C0/C180): 0.37

Total Rated Lamp Lumens: 1159.0 lm

Efficiency: 100%

Upward Ratio: 0%

Central Intensity: 6291.28 cd


Pos of Max. Intensity: H180 V1

S/MH(C90/C270): 0.37

Picture Of Luminaire



Luminous Intensity Distribution Curve

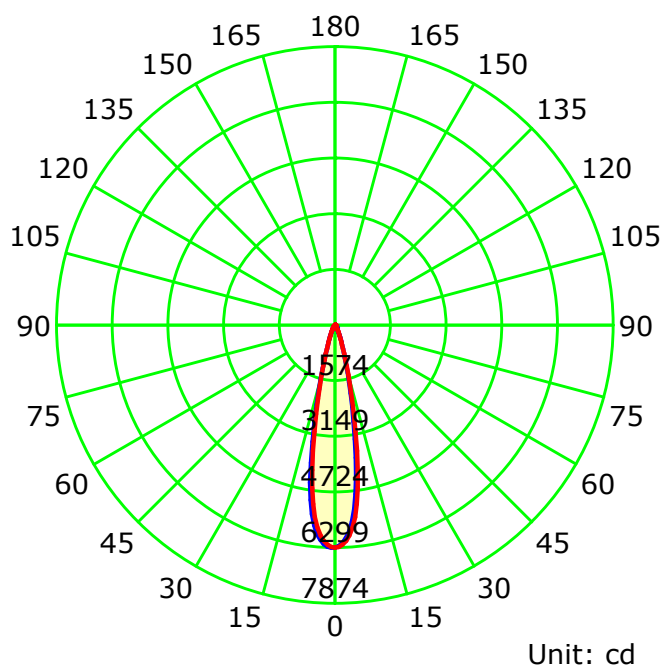

— C0-C180 — C90-C270

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0


Test Device: CHL-6E

Distance: 2.905 m

Humidity:

Inspector:


Luminous Intensity Distribution Curve

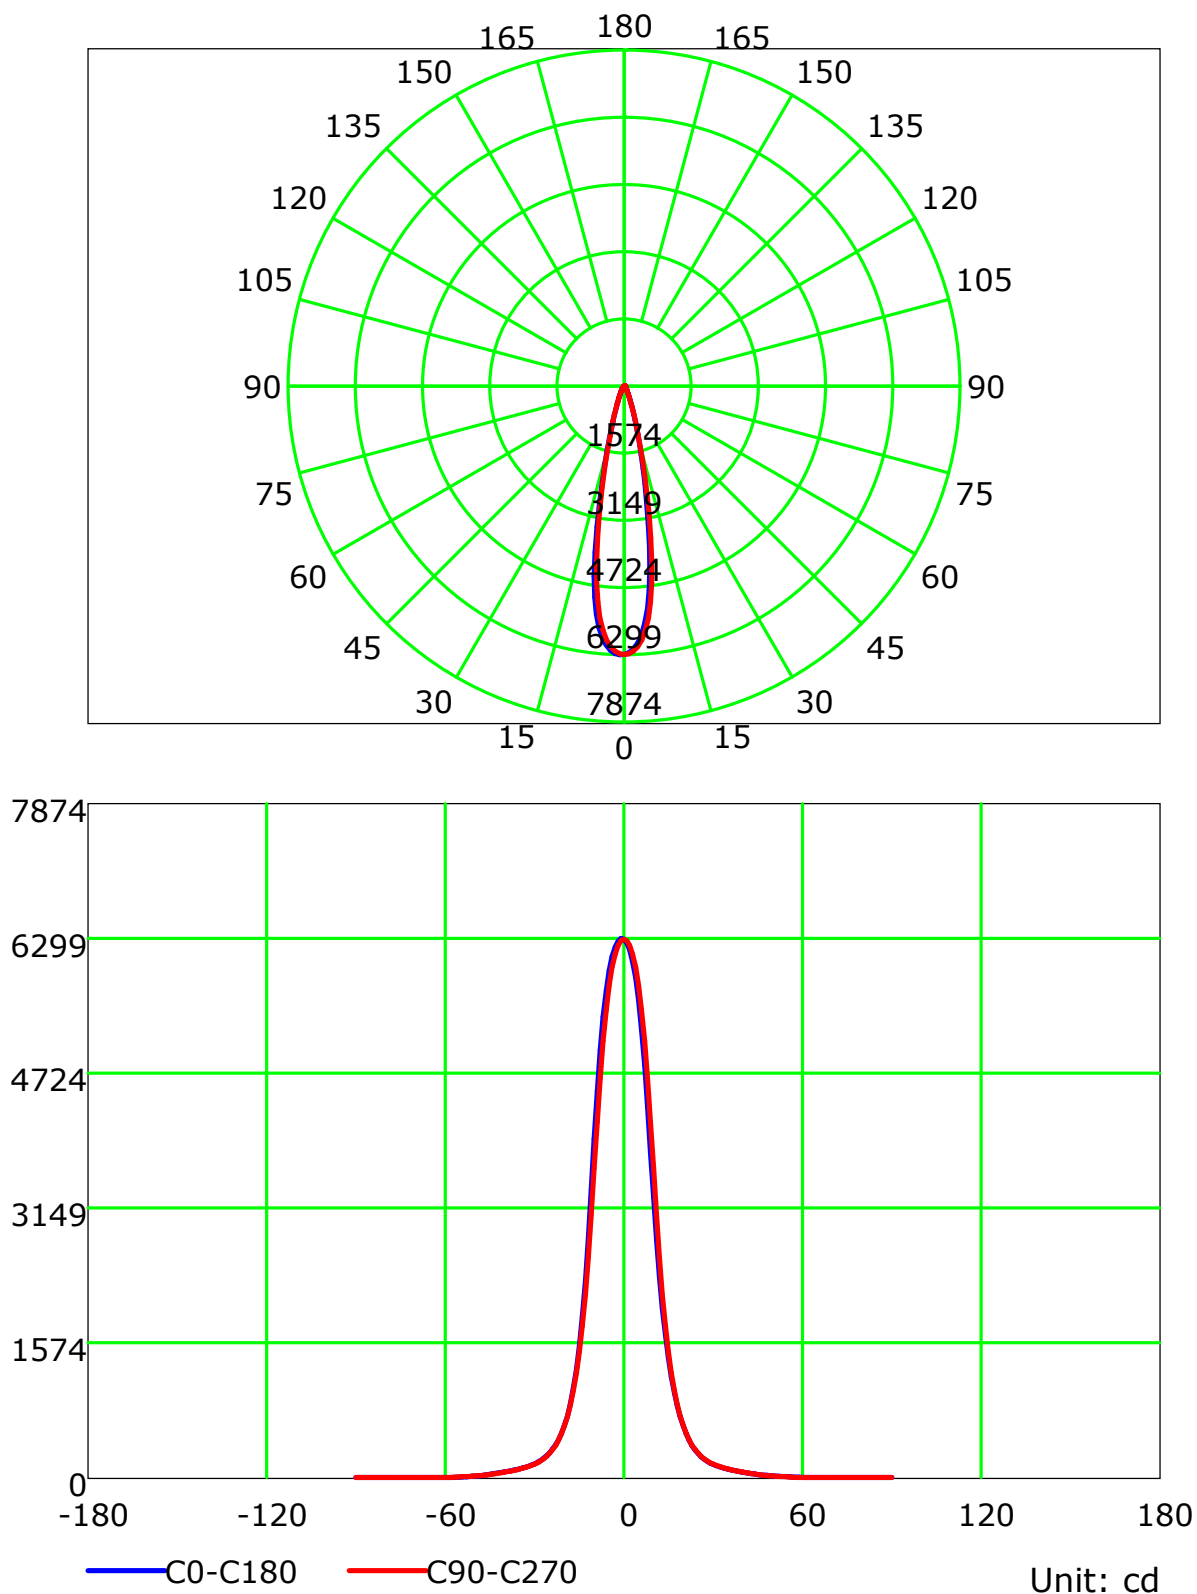

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:


Luminous Intensity Distribution Curve(cd/klm)

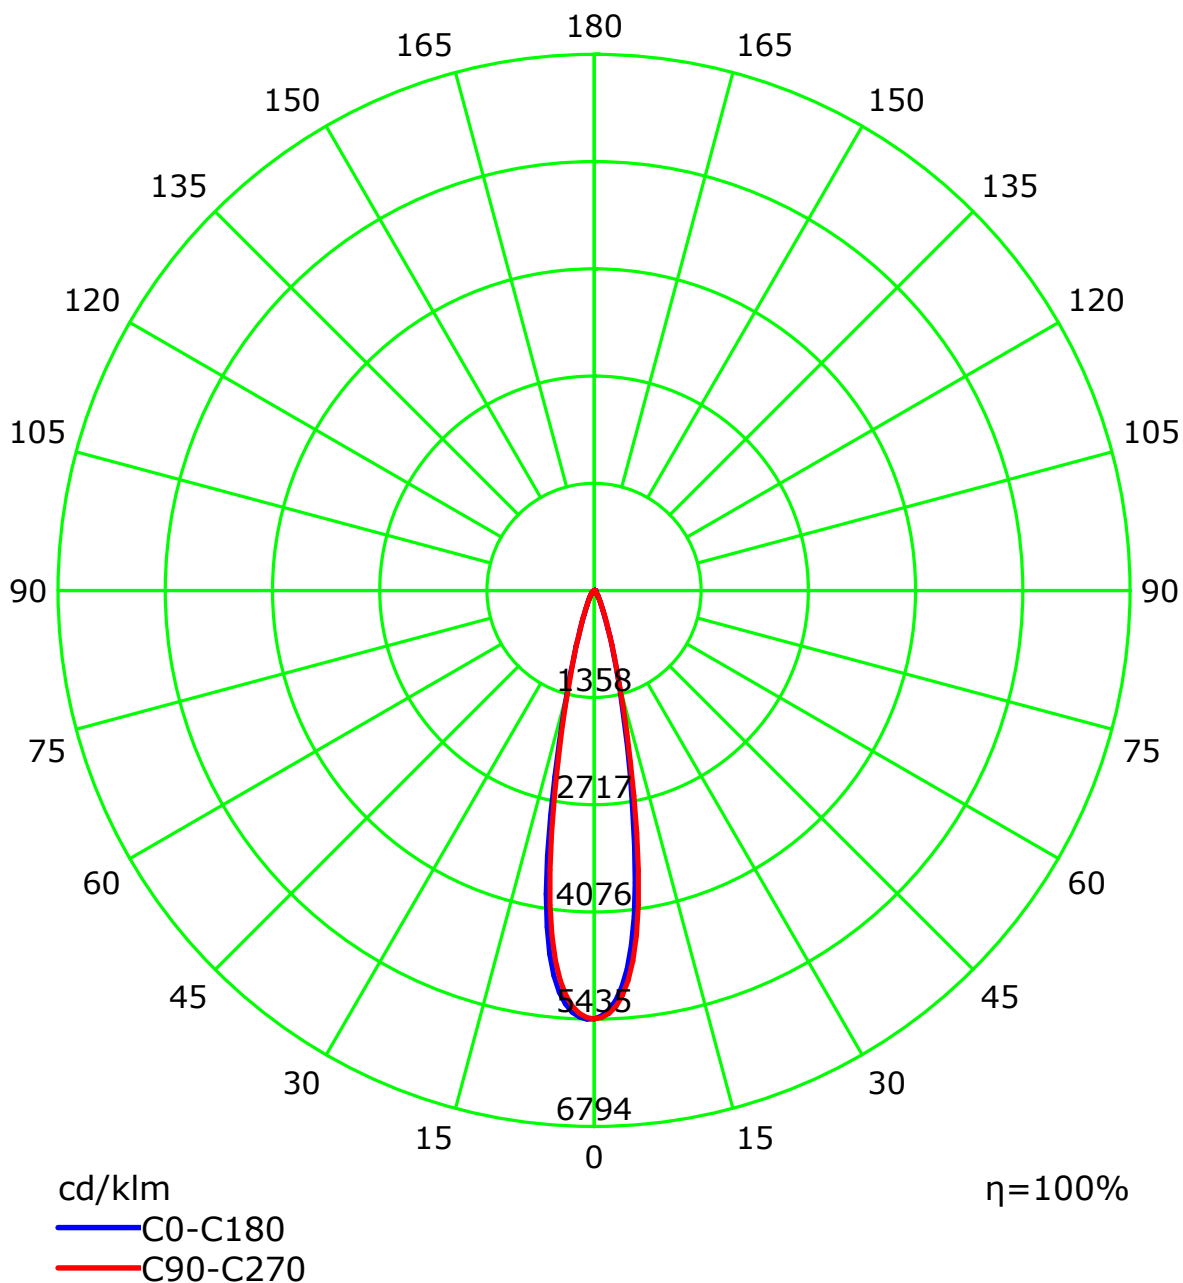

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

Isocandela (rectangle)

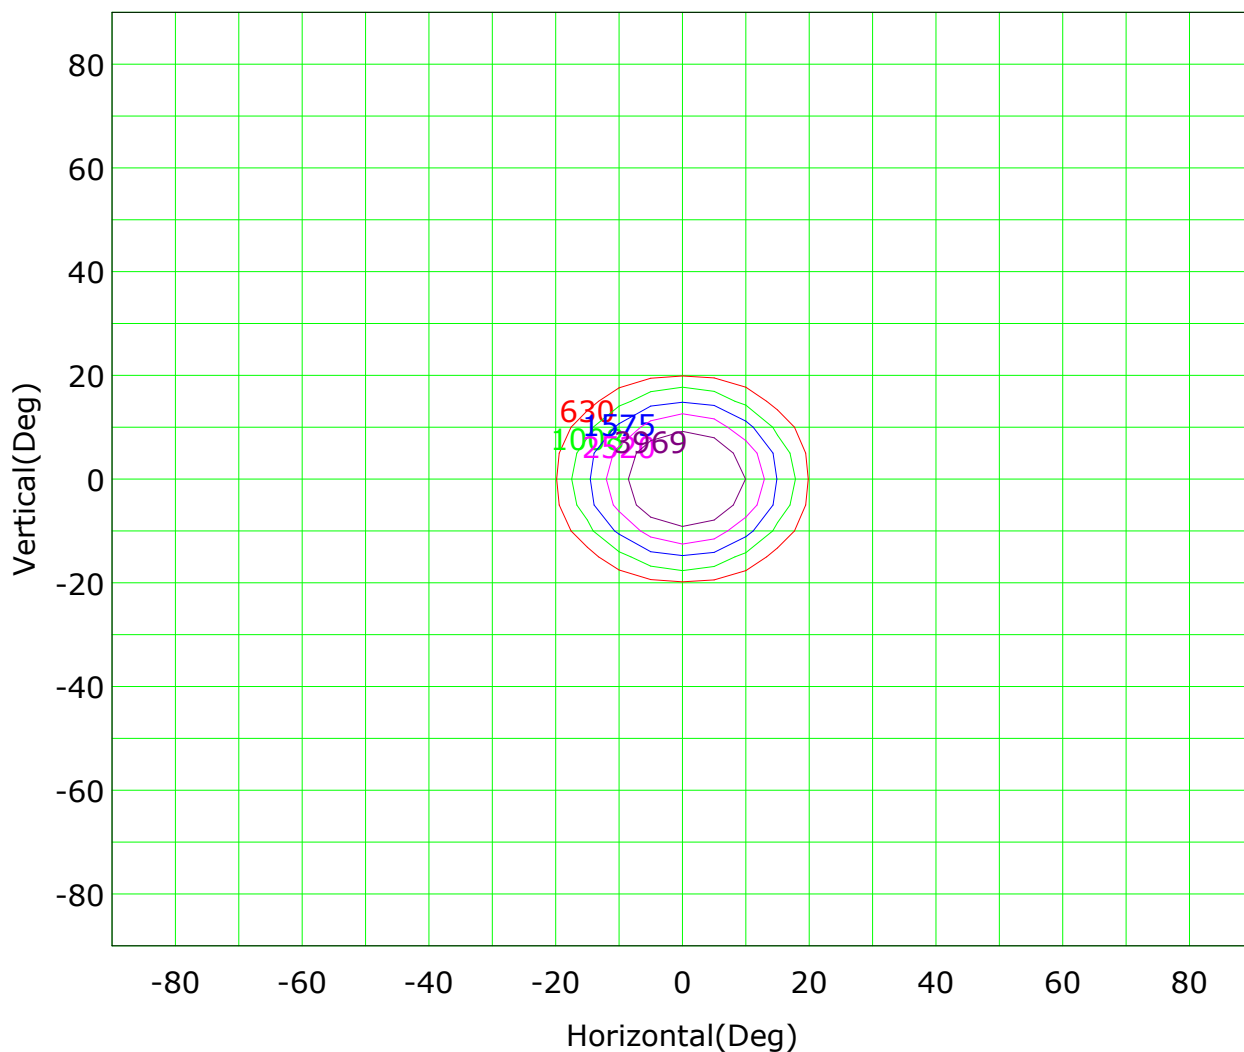

Imax (100%): 6300 cd

(10%): 630 cd	(16%): 1008 cd
(25%): 1575 cd	(40%): 2520 cd
(63%): 3969 cd	(100%): 6300 cd

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0


Test Device: CHL-6E

Distance: 2.905 m

Humidity:

Inspector:

IsoLux Plot

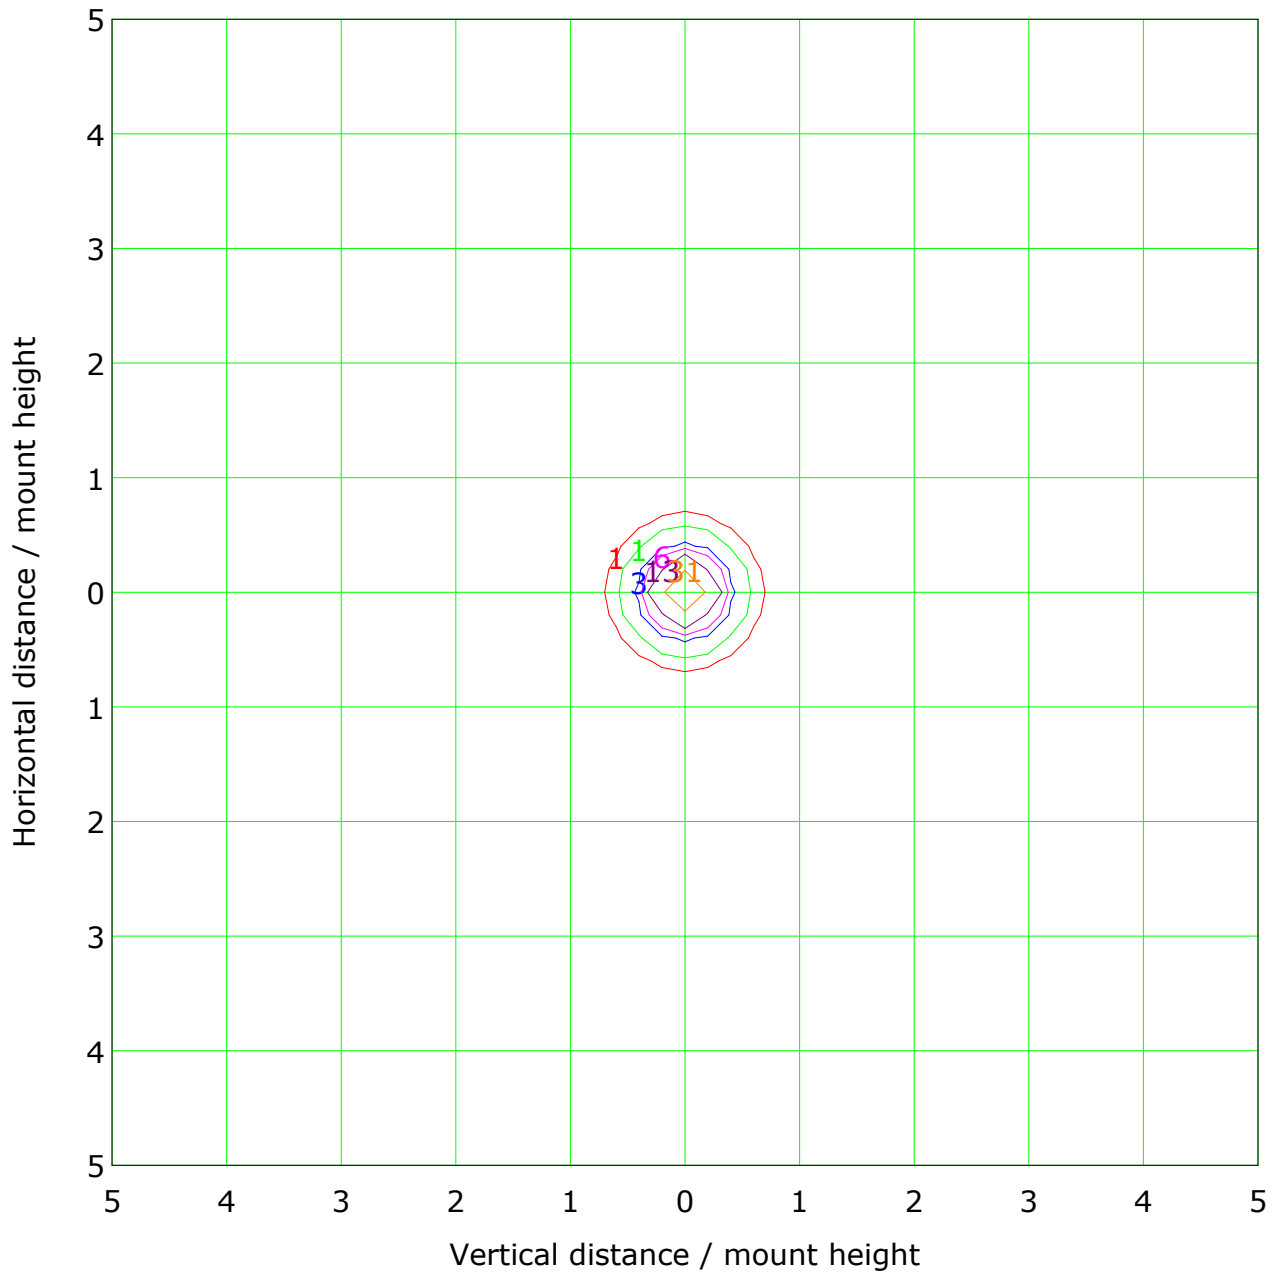

Mounting Height: 10.0m Max Lux(100%): 63.0 lx

(1%): 0.6 lx	(2%): 1.3 lx
(5%): 3.1 lx	(10%): 6.3 lx
(20%): 12.6 lx	(50%): 31.5 lx
(100%): 63.0 lx	

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0


Test Device: CHL-6E

Distance: 2.905 m


Humidity:

Inspector:

Illuminance at a Distance

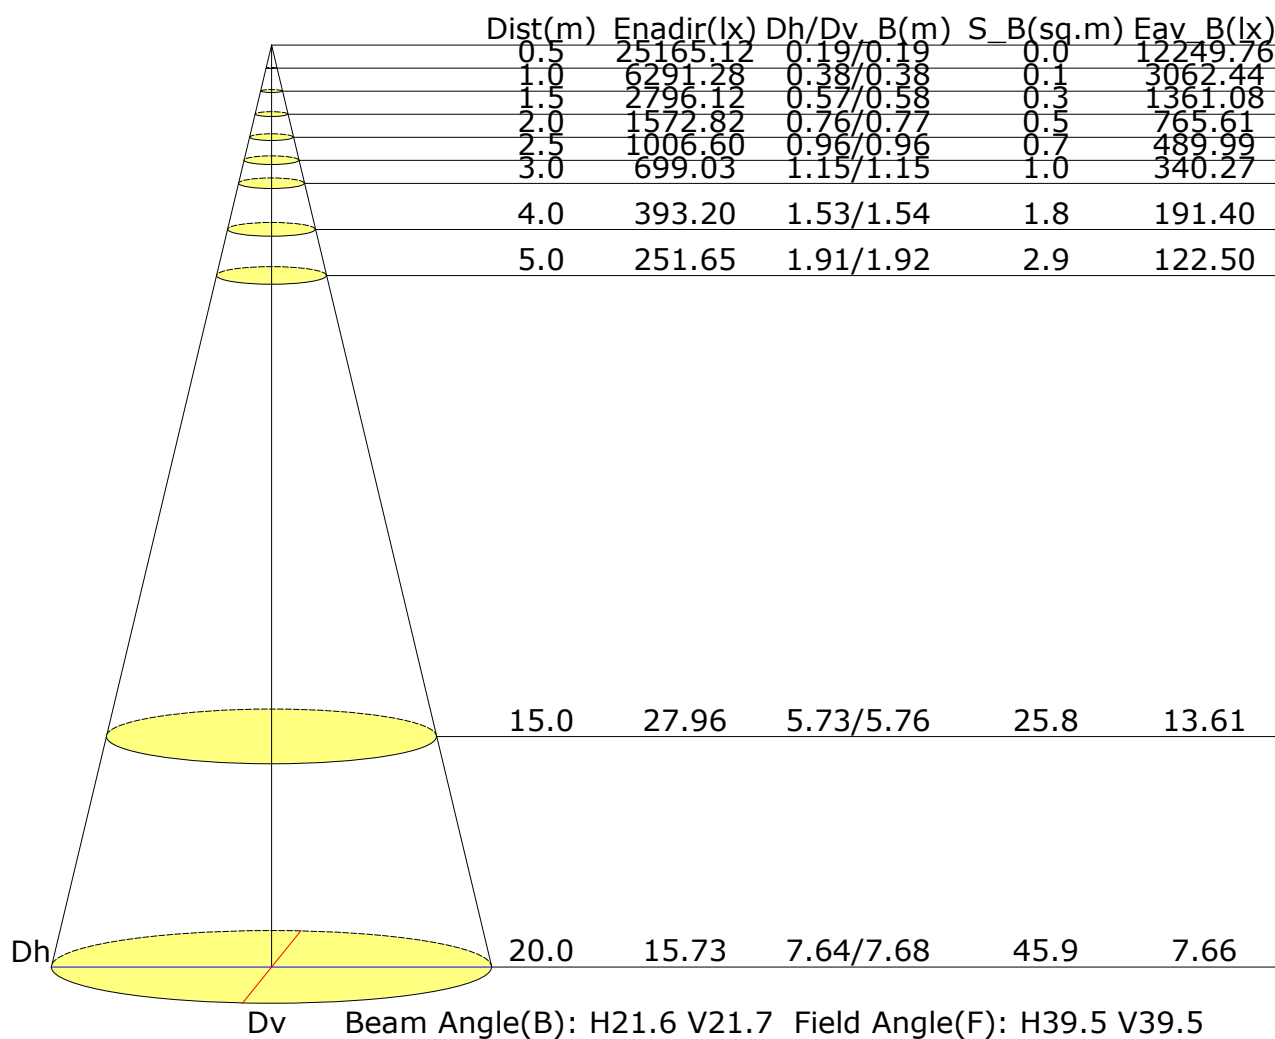

Vertical IsoLux Plot

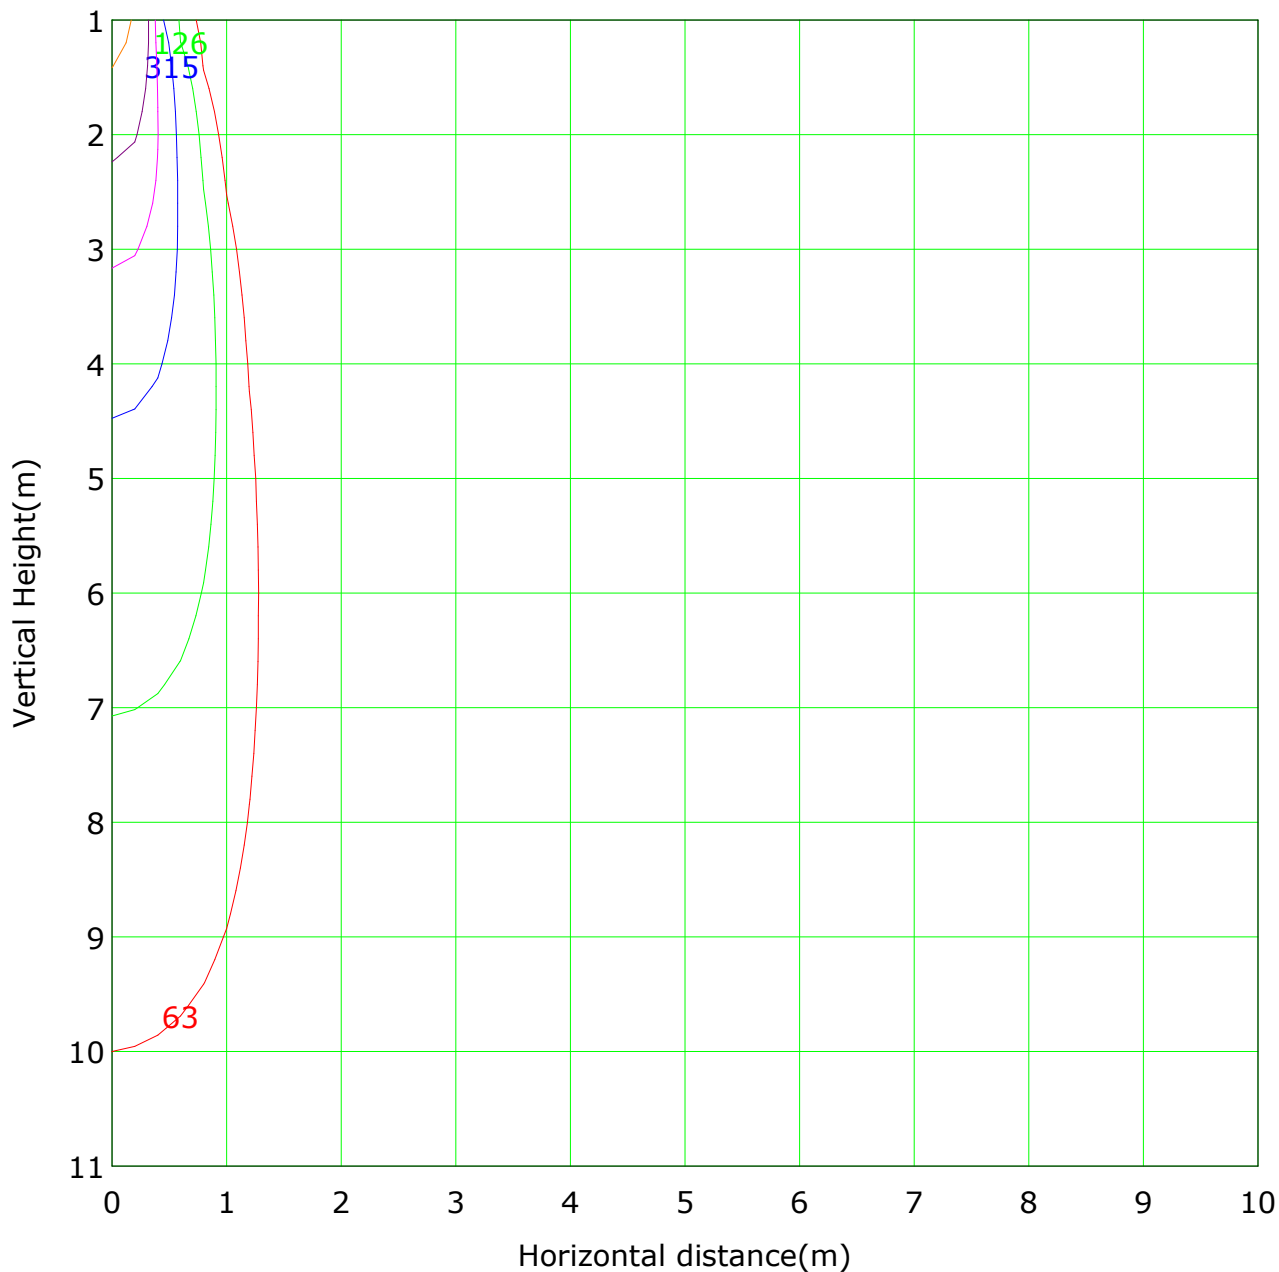


Lowest(m): 1.0m Highest(m): 11.0m Max Lux: 6291.3 lx
— (1%): 62.9 lx — (2%): 125.8 lx
— (5%): 314.6 lx — (10%): 629.1 lx
— (20%):1258.3 lx — (50%):3145.6 lx
— (100%):6291.3 lx

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

The Average Illuminance Effective Figure

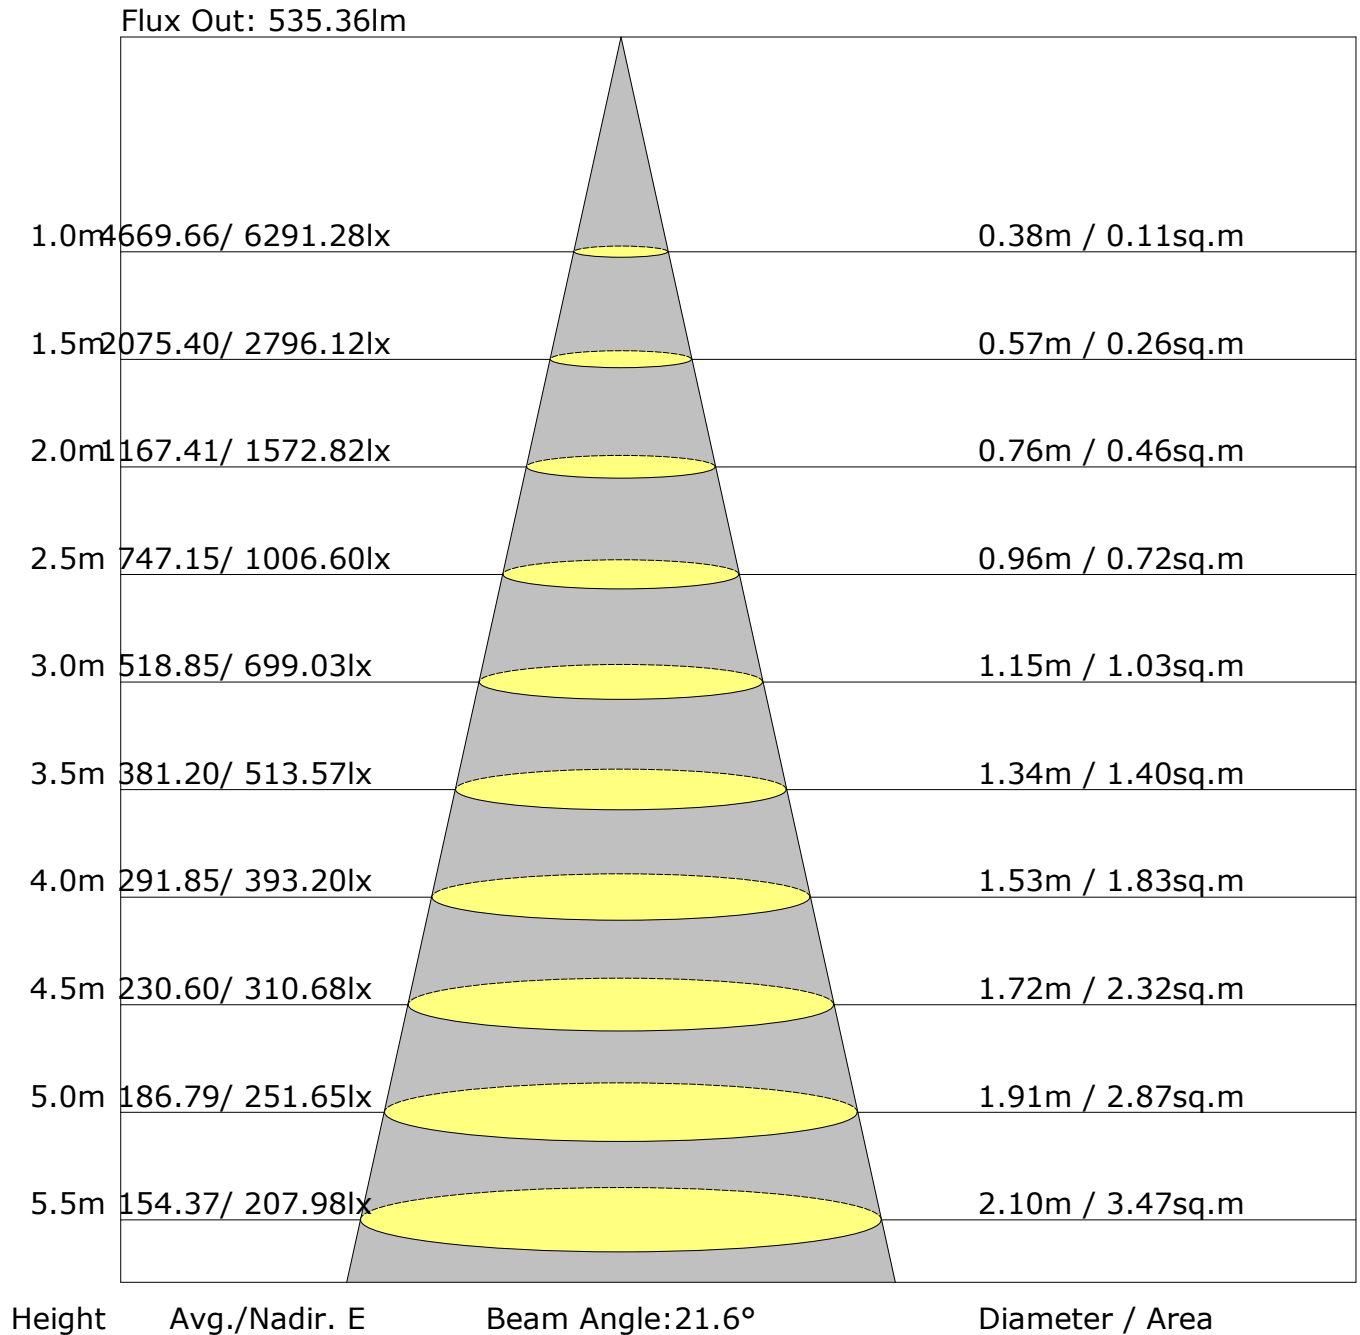

UGR Table

Reflectance:										
Ceiling (cavity)	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
X=2H Y=2H	14.1	14.6	14.3	14.8	15.0	14.1	14.7	14.3	14.9	15.0
3H	13.9	14.5	14.2	14.7	14.9	13.9	14.5	14.2	14.7	14.9
4H	13.8	14.4	14.1	14.6	14.9	13.9	14.4	14.2	14.6	14.9
6H	13.8	14.2	14.1	14.5	14.8	13.8	14.3	14.1	14.5	14.8
8H	13.7	14.2	14.1	14.5	14.8	13.7	14.2	14.1	14.5	14.8
12H	13.7	14.1	14.0	14.4	14.7	13.7	14.1	14.0	14.5	14.8
X=4H Y=2H	13.9	14.4	14.2	14.6	14.9	13.9	14.4	14.2	14.7	14.9
3H	13.7	14.2	14.1	14.5	14.8	13.7	14.2	14.1	14.5	14.8
4H	13.6	14.0	14.0	14.4	14.7	13.6	14.0	14.0	14.4	14.7
6H	13.5	13.9	13.9	14.3	14.6	13.6	13.9	14.0	14.3	14.7
8H	13.5	13.8	13.9	14.2	14.6	13.5	13.8	13.9	14.2	14.6
12H	13.4	13.7	13.9	14.1	14.6	13.5	13.8	13.9	14.2	14.6
X=8H Y=4H	13.5	13.8	13.9	14.2	14.6	13.5	13.8	13.9	14.2	14.6
6H	13.4	13.6	13.8	14.1	14.5	13.4	13.7	13.9	14.1	14.5
8H	13.3	13.6	13.8	14.0	14.5	13.4	13.6	13.8	14.0	14.5
12H	13.3	13.5	13.8	14.0	14.5	13.3	13.5	13.8	14.0	14.5
X=12H Y=4H	13.4	13.7	13.9	14.1	14.6	13.5	13.8	13.9	14.2	14.6
6H	13.3	13.6	13.8	14.0	14.5	13.4	13.6	13.8	14.0	14.5
8H	13.3	13.5	13.8	14.0	14.5	13.3	13.5	13.8	14.0	14.5
Variations with the observer position at spacings:										
S=1.0H	+3.1/-5.9					+3.1/-6.7				
S=1.5H	+5.7/-1.\$					+5.7/-1.\$				
S=2.0H	+7.7/-1.\$					+7.7/-1.\$				

Calculate in accordance with CIE Pub.117. The table is revised with 1159lm ($8\log(F/F_0) = 0.5$).

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

FLUX DISTRIBUTION TABLE BASED ON THE IESNA LUMINAIRE CLASSIFICATION SYSTEM

	ZONE	LUMENS	% LAMP LUMENS
	FORWARD LIGHT	566	48.9
	FL (0°-30°)	515	44.5
	FM (30°-60°)	51	4.4
	FH (60°-80°)	0	0.0
	FVH (80°-90°)	0	0.0
	BACK LIGHT	593	51.1
	BL (0°-30°)	541	46.7
	BM (30°-60°)	51	4.4
	BH (60°-80°)	0	0.0
	BVH (80°-90°)	0	0.0
	UP LIGHT	0	0.0
	UL (90°-100°)	0	0.0
	UH (100°-180°)	0	0.0
	TRAPPED LIGHT	NA	NA

BUG(Backlight,Uplight,Glare) Rating Base On TM-15-07	
Asymmetrical Luminaire Types (Type I,II,III,IV)	B2 U0 G0
Quadrilateral Symmetrical Luminaire Types (Type V,Area Light)	B2 U0 G0

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

Zonal Lumen

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
0.0-1.0	6283.2	6.0	6.0	0.52	0.52
1.0-2.0	6246.7	17.9	23.9	1.55	2.07
2.0-3.0	6167.7	29.5	53.4	2.55	4.61
3.0-4.0	6041.0	40.4	93.9	3.49	8.10
4.0-5.0	5858.1	50.4	144.3	4.35	12.45
5.0-6.0	5608.1	58.9	203.2	5.09	17.53
6.0-7.0	5284.0	65.6	268.8	5.66	23.19
7.0-8.0	4883.1	69.9	338.7	6.03	29.22
8.0-9.0	4410.6	71.5	410.2	6.17	35.39
9.0-10.0	3886.4	70.3	480.6	6.07	41.46
10.0-11.0	3344.3	66.8	547.4	5.77	47.23
11.0-12.0	2824.4	61.7	609.1	5.33	52.56
12.0-13.0	2356.1	55.9	665.1	4.82	57.38
13.0-14.0	1954.1	50.0	715.1	4.32	61.70
14.0-15.0	1620.6	44.5	759.6	3.84	65.54
15.0-16.0	1347.1	39.5	799.1	3.41	68.94
16.0-17.0	1120.6	34.9	834.0	3.01	71.95
17.0-18.0	934.9	30.8	864.8	2.66	74.61
18.0-19.0	783.6	27.3	892.1	2.35	76.97
19.0-20.0	659.0	24.1	916.2	2.08	79.05
20.0-21.0	558.2	21.4	937.6	1.85	80.90
21.0-22.0	476.8	19.2	956.8	1.65	82.55
22.0-23.0	409.0	17.2	973.9	1.48	84.03
23.0-24.0	352.8	15.4	989.4	1.33	85.36
24.0-25.0	306.8	14.0	1003.3	1.20	86.57
25.0-26.0	267.9	12.6	1016.0	1.09	87.66
26.0-27.0	234.9	11.5	1027.5	0.99	88.65
27.0-28.0	208.2	10.5	1038.0	0.91	89.56
28.0-29.0	185.7	9.7	1047.7	0.84	90.40
29.0-30.0	166.1	9.0	1056.7	0.77	91.17
30.0-31.0	150.3	8.4	1065.1	0.72	91.89
31.0-32.0	137.3	7.9	1072.9	0.68	92.57
32.0-33.0	125.7	7.4	1080.3	0.64	93.21
33.0-34.0	115.1	7.0	1087.3	0.60	93.81
34.0-35.0	105.7	6.6	1093.9	0.57	94.38
35.0-36.0	96.5	6.1	1100.0	0.53	94.91

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

Zonal Lumen (Continue 1)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
36.0-37.0	88.8	5.8	1105.8	0.50	95.41
37.0-38.0	81.8	5.5	1111.3	0.47	95.88
38.0-39.0	74.8	5.1	1116.4	0.44	96.32
39.0-40.0	68.5	4.8	1121.1	0.41	96.73
40.0-41.0	62.5	4.5	1125.6	0.38	97.11
41.0-42.0	56.5	4.1	1129.7	0.35	97.47
42.0-43.0	50.9	3.8	1133.5	0.33	97.79
43.0-44.0	46.3	3.5	1137.0	0.30	98.10
44.0-45.0	40.7	3.1	1140.1	0.27	98.37
45.0-46.0	35.1	2.7	1142.8	0.24	98.60
46.0-47.0	31.2	2.5	1145.3	0.21	98.82
47.0-48.0	27.7	2.2	1147.6	0.19	99.01
48.0-49.0	23.9	2.0	1149.5	0.17	99.18
49.0-50.0	20.7	1.7	1151.3	0.15	99.33
50.0-51.0	18.3	1.5	1152.8	0.13	99.46
51.0-52.0	15.1	1.3	1154.1	0.11	99.57
52.0-53.0	12.3	1.1	1155.2	0.09	99.67
53.0-54.0	11.2	1.0	1156.2	0.09	99.75
54.0-55.0	10.2	0.9	1157.1	0.08	99.83
55.0-56.0	8.1	0.7	1157.8	0.06	99.89
56.0-57.0	5.6	0.5	1158.3	0.04	99.94
57.0-58.0	3.2	0.3	1158.6	0.03	99.96
58.0-59.0	2.1	0.2	1158.8	0.02	99.98
59.0-60.0	1.4	0.1	1158.9	0.01	99.99
60.0-61.0	0.7	0.1	1159.0	0.01	100.00
61.0-62.0	0.3	0.0	1159.0	0.00	100.00
62.0-63.0	0.0	0.0	1159.0	0.00	100.00
63.0-64.0	0.0	0.0	1159.0	0.00	100.00
64.0-65.0	0.0	0.0	1159.0	0.00	100.00
65.0-66.0	0.0	0.0	1159.0	0.00	100.00
66.0-67.0	0.0	0.0	1159.0	0.00	100.00
67.0-68.0	0.0	0.0	1159.0	0.00	100.00
68.0-69.0	0.0	0.0	1159.0	0.00	100.00
69.0-70.0	0.0	0.0	1159.0	0.00	100.00
70.0-71.0	0.0	0.0	1159.0	0.00	100.00
71.0-72.0	0.0	0.0	1159.0	0.00	100.00

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

Candlepower Table

Unit: cd

G\C	C0.0	C180.0								
G0.0	6291.3	6291.3								
G1.0	6250.5	6299.7								
G2.0	6169.1	6267.4								
G3.0	6032.9	6201.4								
G4.0	5841.9	6087.6								
G5.0	5579.3	5923.4								
G6.0	5240.9	5688.8								
G7.0	4822.4	5384.1								
G8.0	4335.1	4990.9								
G9.0	3801.4	4514.8								
G10.0	3273.4	3955.9								
G11.0	2784.7	3363.3								
G12.0	2352.2	2797.4								
G13.0	1978.7	2296.0								
G14.0	1665.5	1876.2								
G15.0	1401.5	1539.1								
G16.0	1179.6	1268.1								
G17.0	990.0	1044.8								
G18.0	837.0	867.9								
G19.0	707.8	721.8								
G20.0	599.6	606.7								
G21.0	509.8	516.8								
G22.0	436.7	443.8								
G23.0	372.1	383.4								
G24.0	321.6	334.2								
G25.0	280.9	290.7								
G26.0	244.4	255.6								
G27.0	214.9	224.7								
G28.0	192.4	200.8								
G29.0	169.9	179.8								
G30.0	154.5	160.1								
G31.0	140.4	146.1								
G32.0	129.2	133.4								
G33.0	118.0	122.2								
G34.0	108.1	112.3								
G35.0	99.7	102.5								
G36.0	89.9	94.1								

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

Candlepower Table (Continue 1)

Unit: cd

G\C	C0.0	C180.0								
G37.0	82.8	88.5								
G38.0	75.8	80.1								
G39.0	68.8	74.4								
G40.0	63.2	67.4								
G41.0	56.2	63.2								
G42.0	50.5	56.2								
G43.0	46.3	50.5								
G44.0	42.1	46.3								
G45.0	35.1	39.3								
G46.0	32.3	33.7								
G47.0	29.5	29.5								
G48.0	26.7	25.3								
G49.0	22.5	21.1								
G50.0	21.1	18.3								
G51.0	18.3	15.4								
G52.0	15.4	11.2								
G53.0	12.6	9.8								
G54.0	12.6	9.8								
G55.0	11.2	7.0								
G56.0	9.8	4.2								
G57.0	7.0	1.4								
G58.0	4.2	0.0								
G59.0	4.2	0.0								
G60.0	1.4	0.0								
G61.0	1.4	0.0								
G62.0	0.0	0.0								
G63.0	0.0	0.0								
G64.0	0.0	0.0								
G65.0	0.0	0.0								
G66.0	0.0	0.0								
G67.0	0.0	0.0								
G68.0	0.0	0.0								
G69.0	0.0	0.0								
G70.0	0.0	0.0								
G71.0	0.0	0.0								
G72.0	0.0	0.0								
G73.0	0.0	0.0								

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

Unit: cd

[illegible]

Inspector: