

Report No.:

Test Time: 2025-09-13 11:30

Luminaire Property

Luminaire Manufacturer:

Luminaire Description: FLEXI 铝杯款 15D 2025.9.13

Luminous Length (mm): -68

Voltage: 229.3 V

Power: 14.90 W

Luminous Width (mm): -68

Current: 0.105 A

Power Factor: 0.621

Photometric Results

CIE Class: Direct

Measurement Flux: 1398.3 lm

Downward Ratio: 100%

Horizontal Diffuse Angle(50%): H19.2

Vertical Diffuse Angle(50%): V19.2

Luminaire Efficacy Rating (LER): 93.89

Max. Intensity: 8758.64 cd

S/MH(C0/C180): 0.34

Total Rated Lamp Lumens: 1398.3 lm

Efficiency: 100%

Upward Ratio: 0%

Central Intensity: 8658.93 cd


Pos of Max. Intensity: H0 V2

S/MH(C90/C270): 0.34

Picture Of Luminaire



Luminous Intensity Distribution Curve

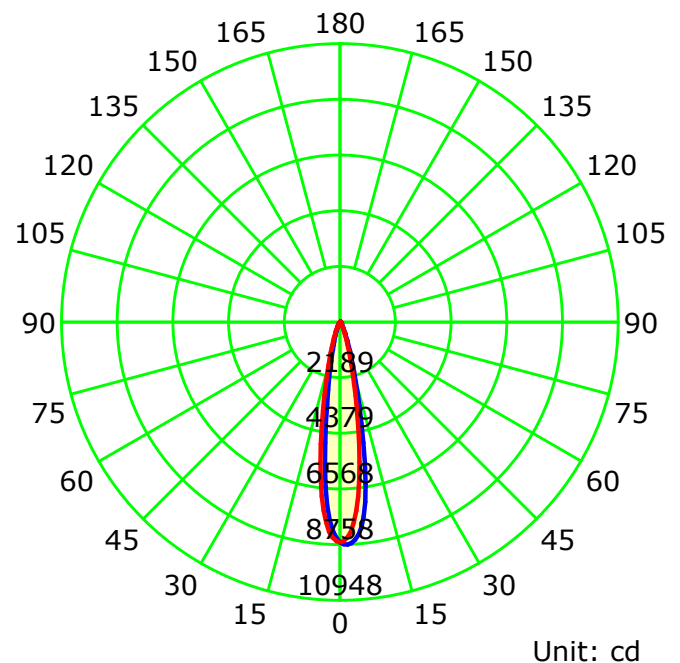

— C0-C180 — C90-C270

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0



Test Device: CHL-6E

Distance: 2.905 m

Humidity:

Inspector:


Luminous Intensity Distribution Curve

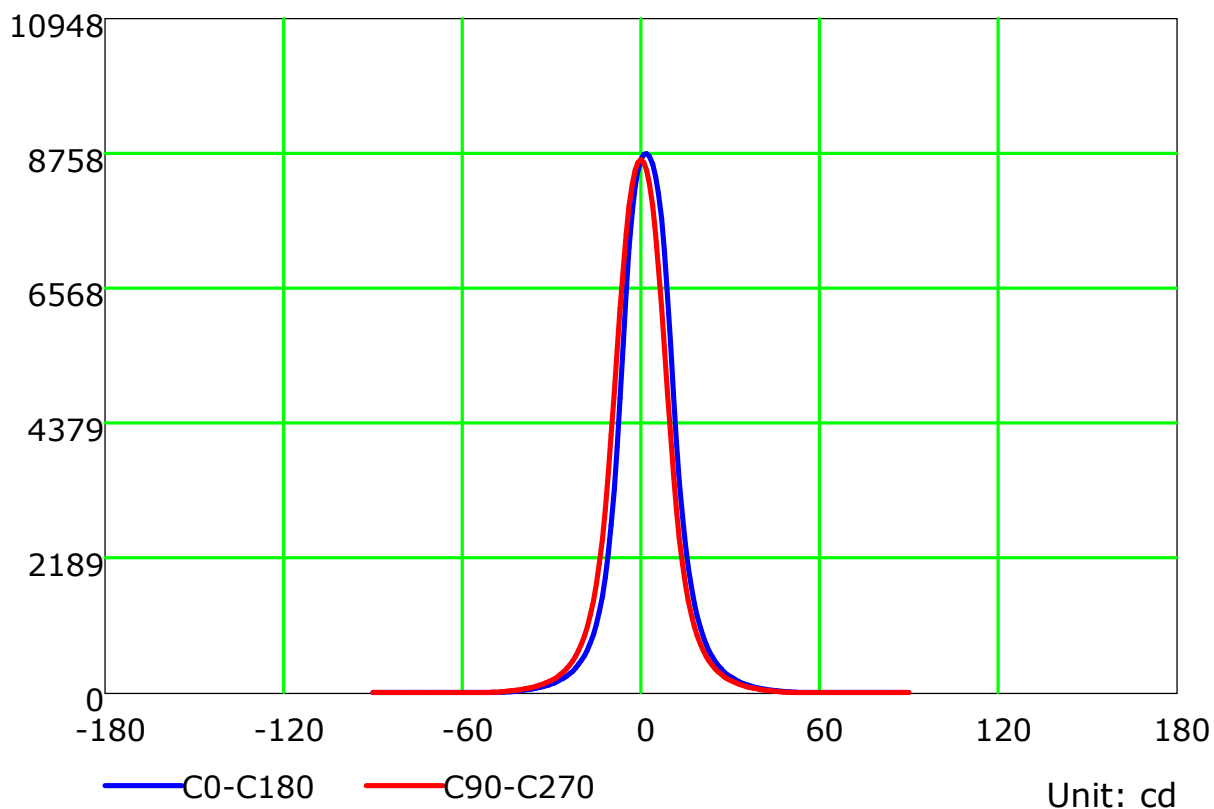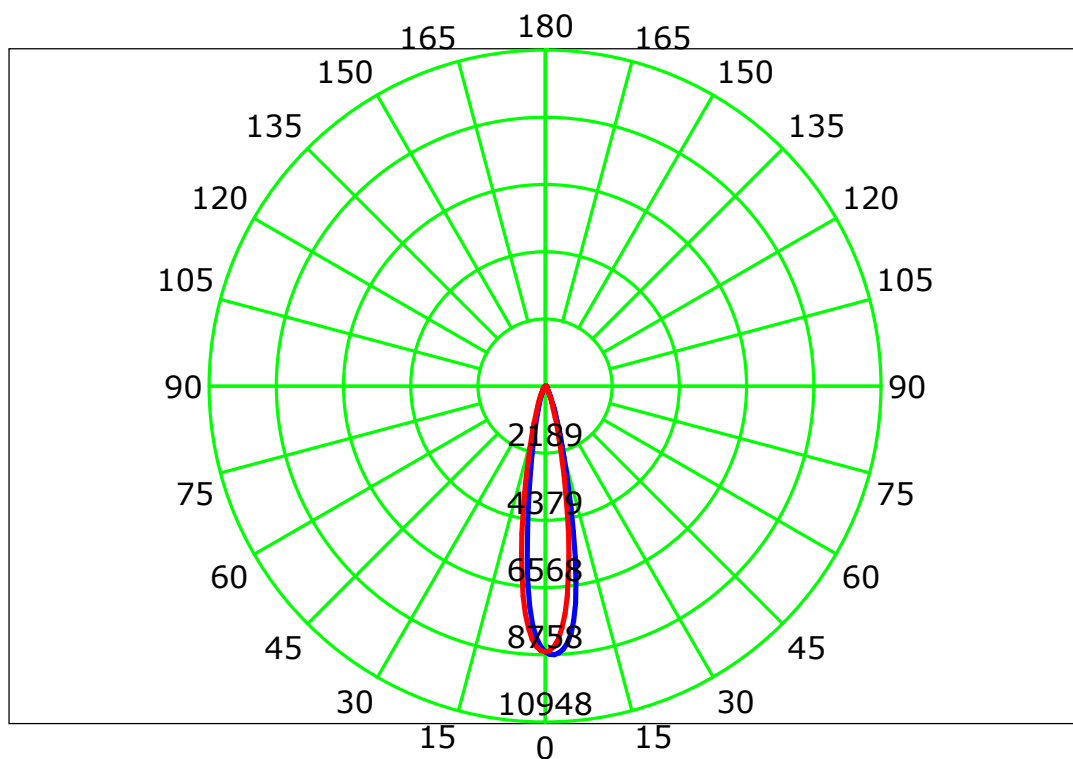

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:


Luminous Intensity Distribution Curve(cd/klm)

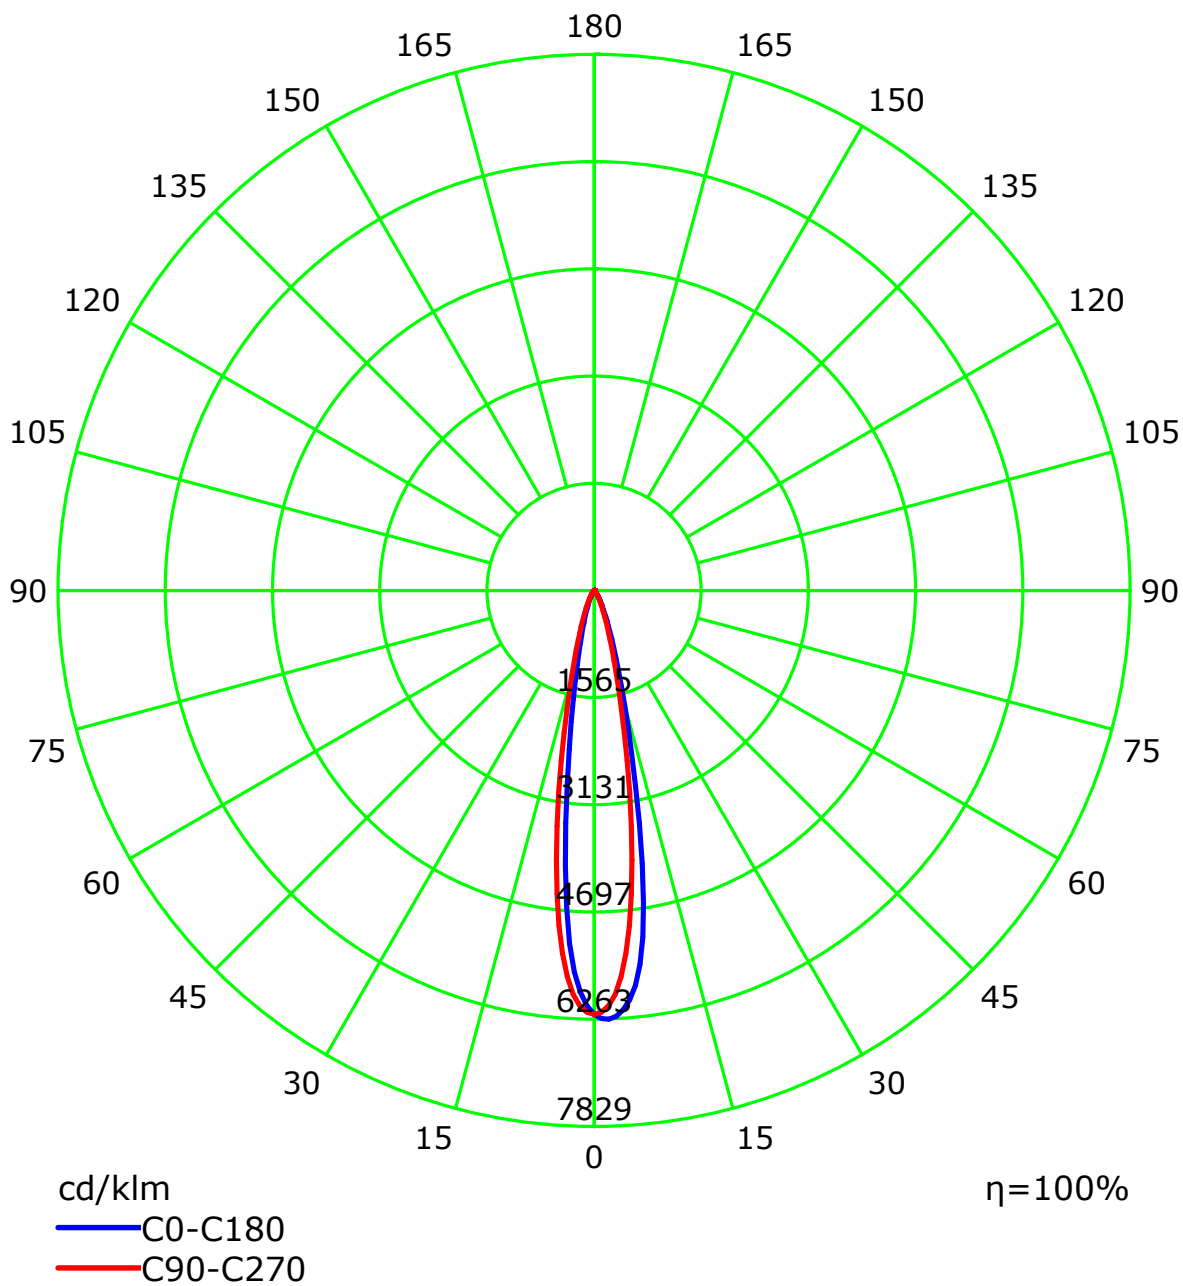

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

Isocandela (rectangle)

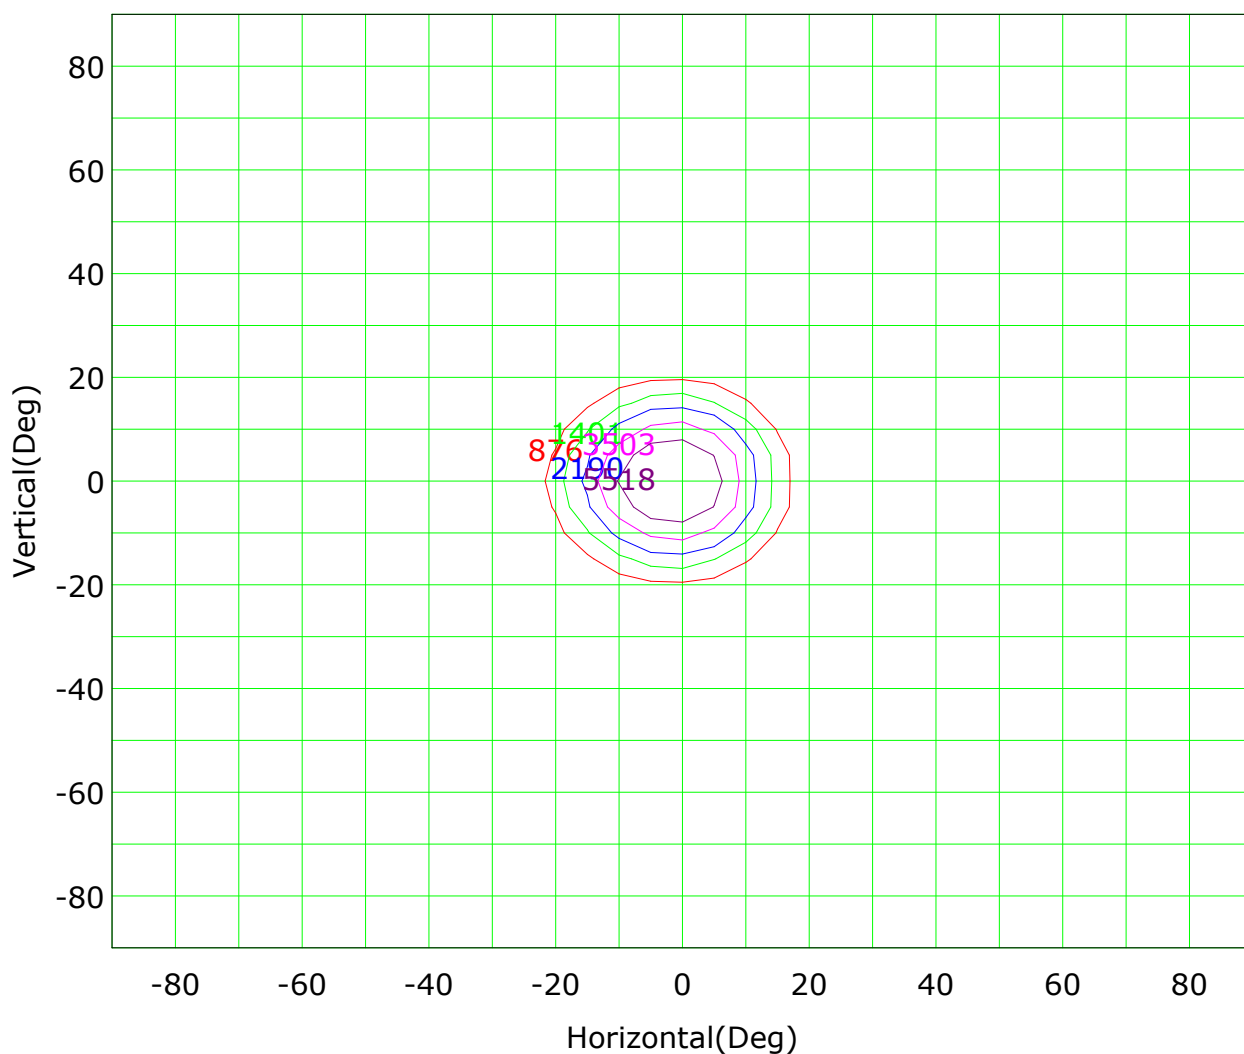

Imax (100%): 8759 cd

(10%): 876 cd	(16%): 1401 cd
(25%): 2190 cd	(40%): 3503 cd
(63%): 5518 cd	(100%): 8759 cd

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0


Test Device: CHL-6E

Distance: 2.905 m

Humidity:

Inspector:

IsoLux Plot

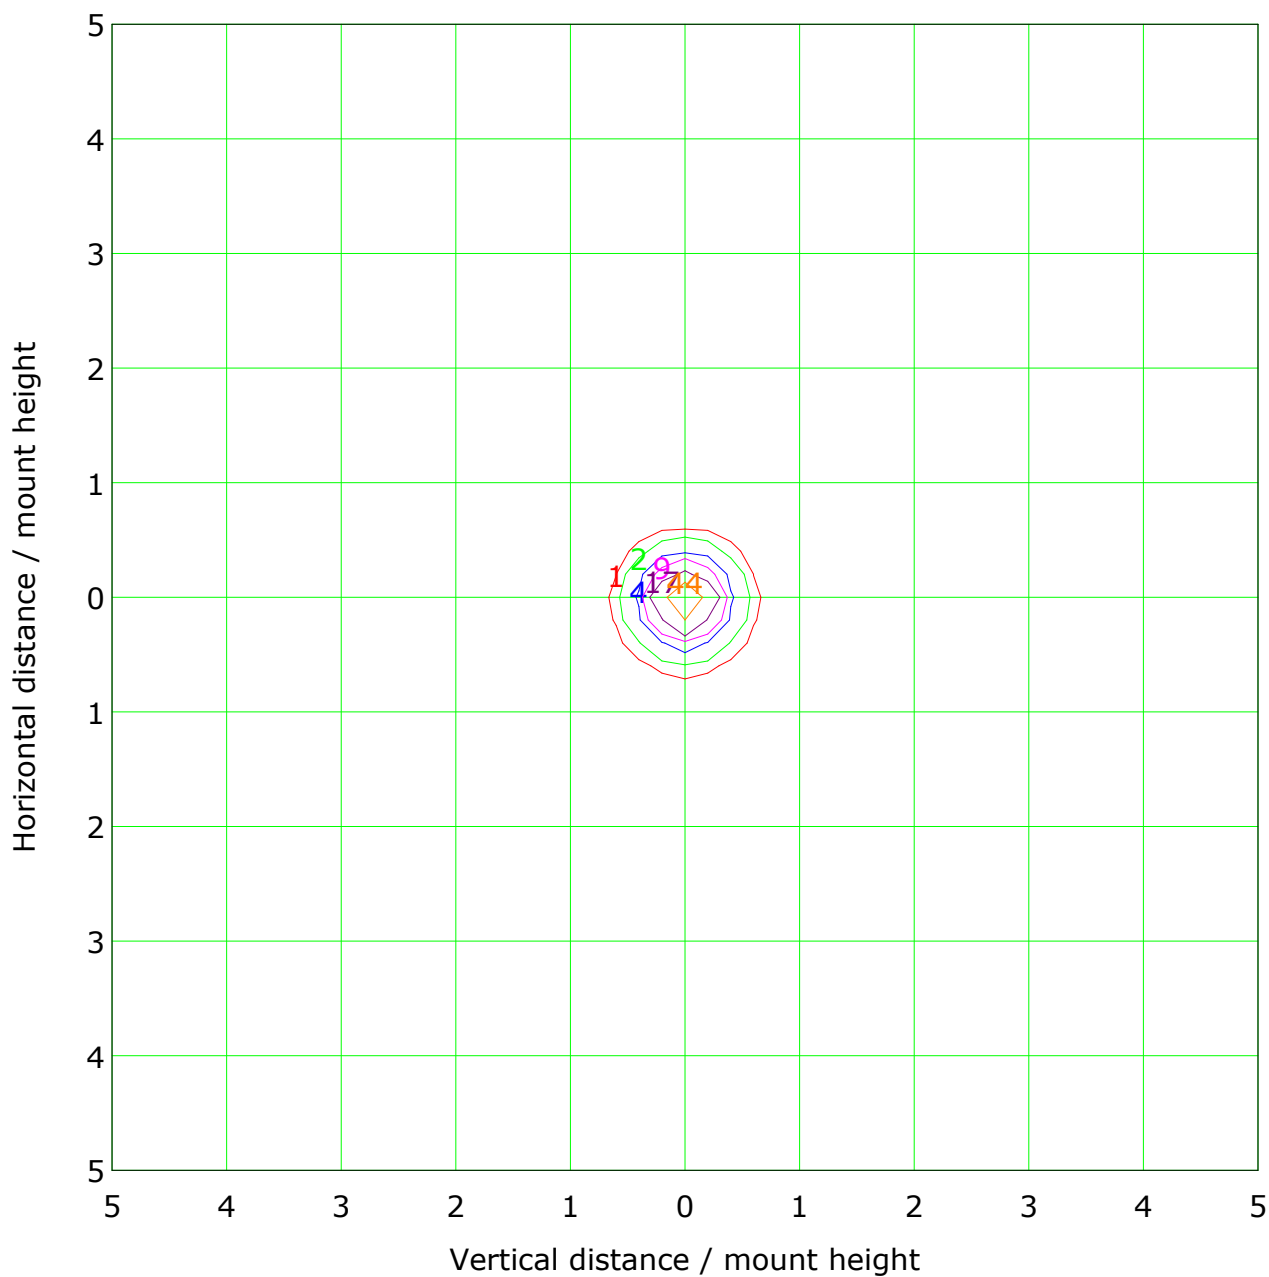

Mounting Height: 10.0m Max Lux(100%): 87.4 lx

(1%): 0.9 lx	(2%): 1.7 lx
(5%): 4.4 lx	(10%): 8.7 lx
(20%): 17.5 lx	(50%): 43.7 lx
(100%): 87.4 lx	

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0


Test Device: CHL-6E

Distance: 2.905 m


Humidity:

Inspector:

Illuminance at a Distance

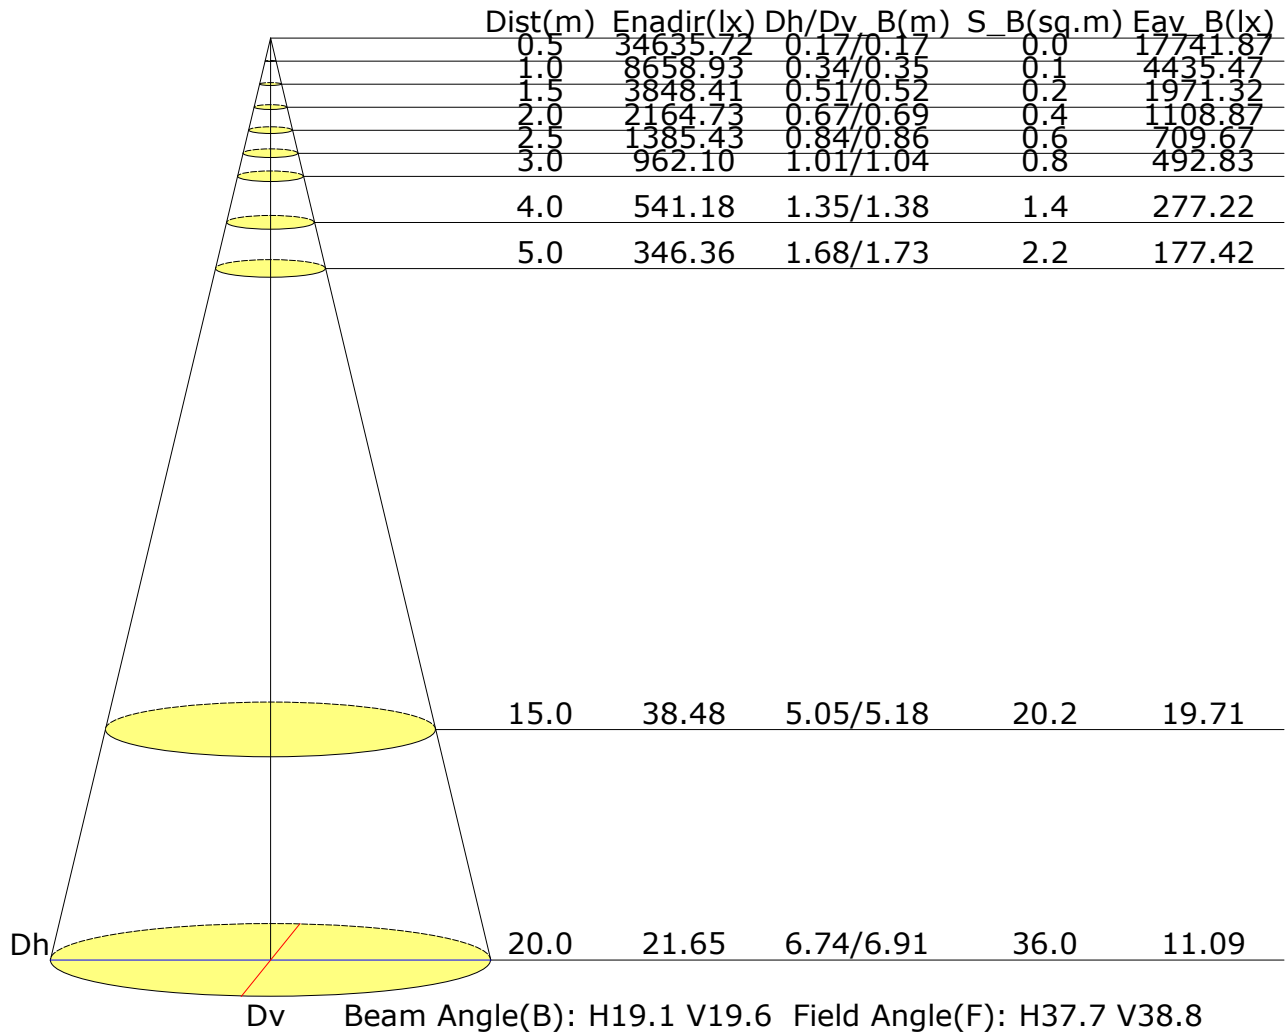

Vertical IsoLux Plot

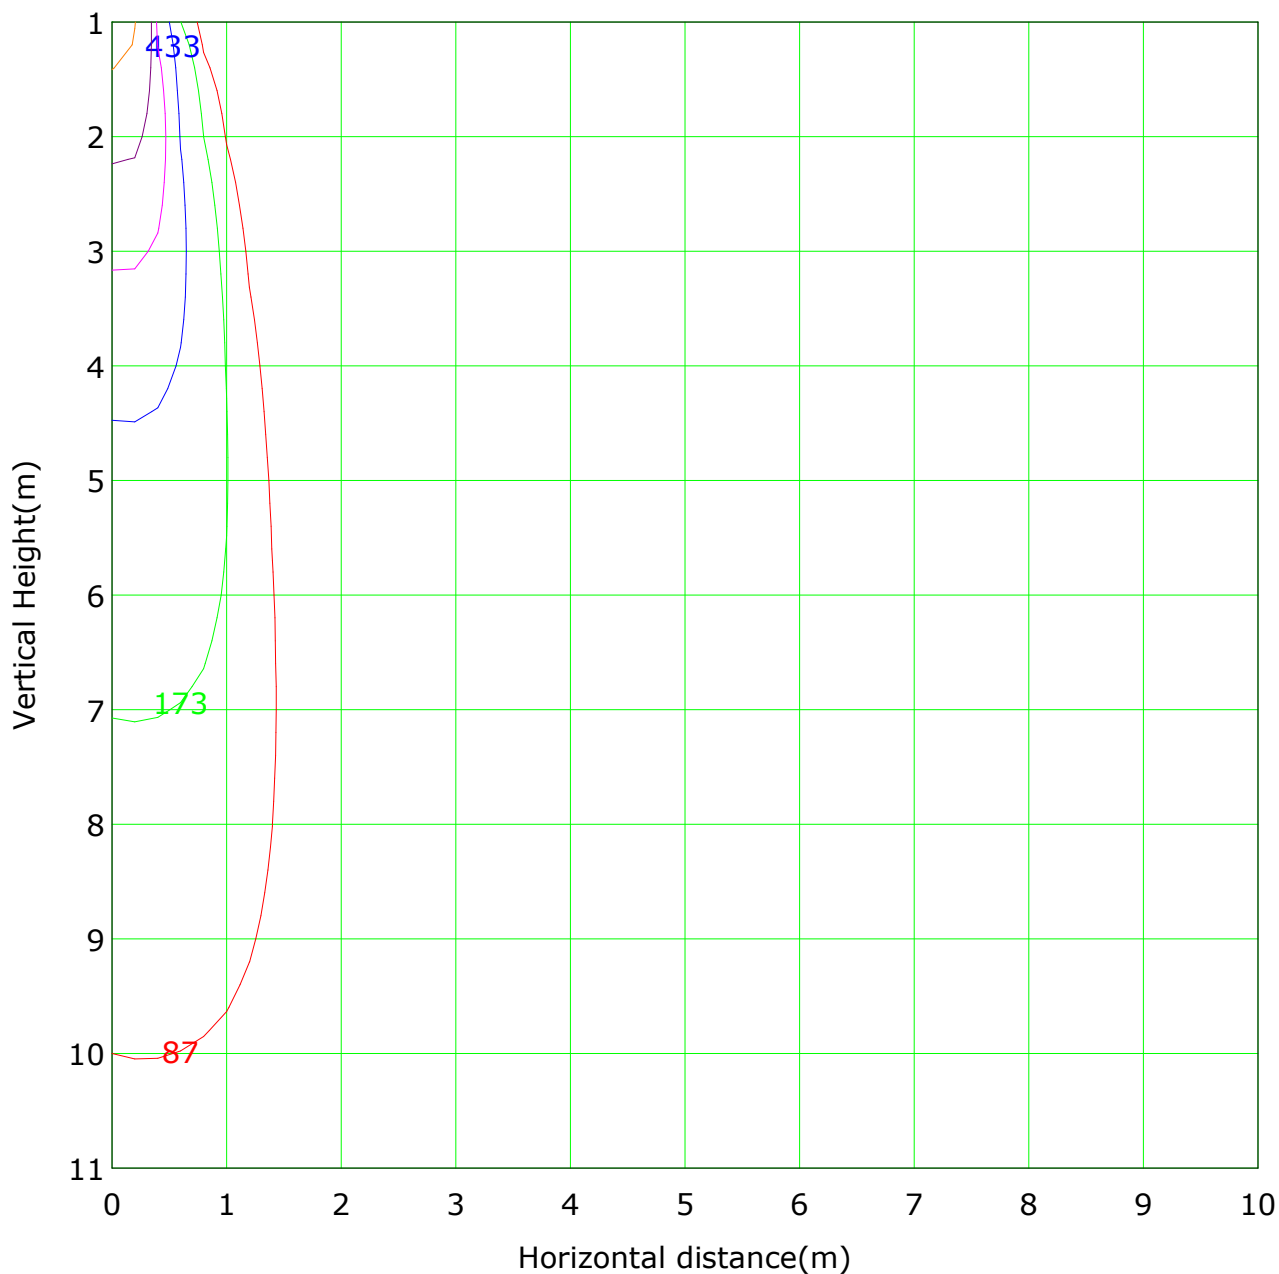

Lowest(m): 1.0m Highest(m): 11.0m Max Lux: 8658.9 lx
— (1%): 86.6 lx — (2%): 173.2 lx
— (5%): 432.9 lx — (10%): 865.9 lx
— (20%): 1731.8 lx — (50%): 4329.5 lx
— (100%): 8658.9 lx

C Plane (°): 0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°): 0.0-90.0: 1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

Area Flux Table

Unit: lm

		Vertical plane																									
		-90	-80	-70	-60	-50	-40	-30	-20	-10	0	10	20	30	40	50	60	70	80	90	Flux(T)	Flux(E)					
Horizontal plane	-90	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.3	1.9	7.9	35.2	153.5	190.5	64.2	13.8	3.5	0.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	-80	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2	1.5	5.4	17.8	47.2	54.8	25.2	8.2	2.4	0.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	-70	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.3	1.9	7.9	35.2	153.5	190.5	64.2	13.8	3.5	0.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	-60	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.8	2.7	6.5	11.3	12.3	8.0	3.7	1.3	0.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	-50	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2	1.5	5.4	17.8	47.2	54.8	25.2	8.2	2.4	0.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	-40	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.8	2.7	6.5	11.3	12.3	8.0	3.7	1.3	0.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	-30	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2	1.5	5.4	17.8	47.2	54.8	25.2	8.2	2.4	0.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	-20	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.3	1.9	7.9	35.2	153.5	190.5	64.2	13.8	3.5	0.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	-10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.3	1.9	7.9	35.2	153.5	190.5	64.2	13.8	3.5	0.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.3	1.9	7.9	35.2	153.5	190.5	64.2	13.8	3.5	0.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2	1.5	5.4	17.8	47.2	54.8	25.2	8.2	2.4	0.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	20	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.8	2.7	6.5	11.3	12.3	8.0	3.7	1.3	0.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	30	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2	0.9	2.7	6.5	11.3	12.3	8.0	3.7	1.3	0.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	40	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2	0.9	2.7	6.5	11.3	12.3	8.0	3.7	1.3	0.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	50	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.4	0.7	2.7	6.5	11.3	12.3	8.0	3.7	1.3	0.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	60	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.4	0.7	2.7	6.5	11.3	12.3	8.0	3.7	1.3	0.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	70	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.4	0.7	2.7	6.5	11.3	12.3	8.0	3.7	1.3	0.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	80	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.4	0.7	2.7	6.5	11.3	12.3	8.0	3.7	1.3	0.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	90	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.4	0.7	2.7	6.5	11.3	12.3	8.0	3.7	1.3	0.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	Flux(T)	0.0	0.0	0.0	0.0	1.1	8.8	34.1	123.9	431.8	523.4	200.8	54.5	15.3	3.1	0.1	0.0	0.0	0.0	0.0	0.0	1397					
	Flux(E)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	65.5	392.3	484.2	155.2	2.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0


Test Device: CHL-6E

Distance: 2.905 m

Humidity:

Inspector:

The Average Illuminance Effective Figure

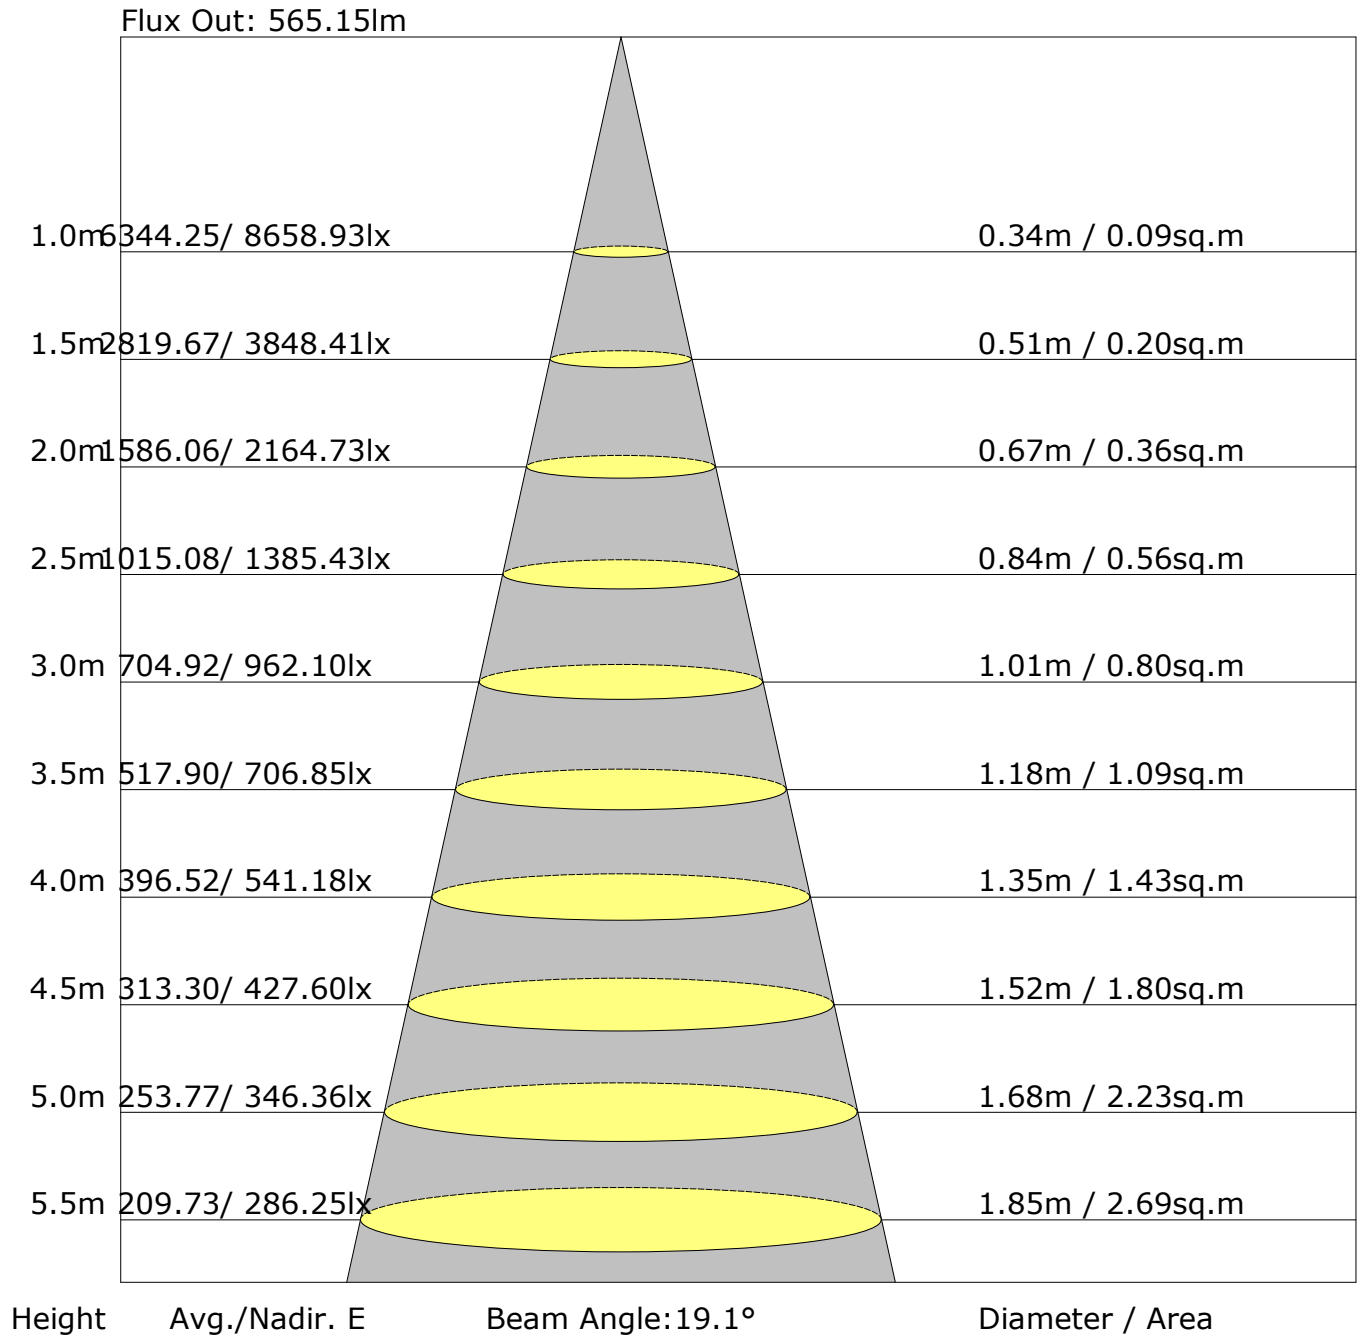

C Plane (°): 0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°): 0.0-90.0: 1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

UGR Table

Reflectance:										
Ceiling (cavity)	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
X=2H Y=2H	12.7	13.2	12.9	13.4	13.6	11.5	12.1	11.7	12.3	12.4
3H	12.5	13.1	12.8	13.3	13.5	11.4	11.9	11.6	12.1	12.3
4H	12.5	13.0	12.8	13.2	13.5	11.3	11.8	11.6	12.0	12.3
6H	12.4	12.8	12.7	13.1	13.4	11.2	11.7	11.5	12.0	12.2
8H	12.3	12.8	12.7	13.1	13.4	11.2	11.6	11.5	11.9	12.2
12H	12.3	12.7	12.6	13.0	13.3	11.1	11.6	11.5	11.9	12.2
X=4H Y=2H	12.5	13.0	12.8	13.2	13.5	11.3	11.8	11.6	12.0	12.3
3H	12.3	12.7	12.6	13.0	13.3	11.1	11.6	11.5	11.9	12.2
4H	12.2	12.6	12.6	12.9	13.3	11.0	11.4	11.4	11.8	12.1
6H	12.1	12.5	12.5	12.8	13.2	11.0	11.3	11.4	11.7	12.0
8H	12.1	12.4	12.5	12.8	13.2	10.9	11.2	11.3	11.6	12.0
12H	12.0	12.3	12.5	12.7	13.1	10.9	11.1	11.3	11.5	12.0
X=8H Y=4H	12.1	12.4	12.5	12.8	13.2	10.9	11.2	11.3	11.6	12.0
6H	12.0	12.2	12.4	12.7	13.1	10.8	11.1	11.3	11.5	11.9
8H	11.9	12.1	12.4	12.6	13.1	10.8	11.0	11.2	11.4	11.9
12H	11.9	12.1	12.4	12.5	13.0	10.7	10.9	11.2	11.4	11.9
X=12H Y=4H	12.0	12.3	12.5	12.7	13.1	10.9	11.1	11.3	11.5	12.0
6H	11.9	12.1	12.4	12.6	13.1	10.8	11.0	11.2	11.4	11.9
8H	11.9	12.1	12.4	12.5	13.0	10.7	10.9	11.2	11.4	11.9
Variations with the observer position at spacings:										
S=1.0H	+5.0/-1.\$					+4.8/-1.\$				
S=1.5H	+7.8/-1.\$					+7.6/-1.\$				
S=2.0H	+9.8/-1.\$					+9.6/-1.\$				

Calculate in accordance with CIE Pub.117. The table is revised with 1398lm ($8\log(F/F_0) = 1.2$).

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

FLUX DISTRIBUTION TABLE BASED ON THE IESNA LUMINAIRE CLASSIFICATION SYSTEM

	ZONE	LUMENS	% LAMP LUMENS
	FORWARD LIGHT	798	57.1
	FL (0°-30°)	746	53.3
	FM (30°-60°)	52	3.7
	FH (60°-80°)	0	0.0
	FVH (80°-90°)	0	0.0
	BACK LIGHT	600	42.9
	BL (0°-30°)	564	40.3
	BM (30°-60°)	37	2.6
	BH (60°-80°)	0	0.0
	BVH (80°-90°)	0	0.0
	UP LIGHT	0	0.0
	UL (90°-100°)	0	0.0
	UH (100°-180°)	0	0.0
	TRAPPED LIGHT	NA	NA

BUG(Backlight,Uplight,Glare) Rating Base On TM-15-07	
Asymmetrical Luminaire Types (Type I,II,III,IV)	B2 U0 G0
Quadrilateral Symmetrical Luminaire Types (Type V,Area Light)	B2 U0 G0

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

Zonal Lumen

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
0.0-1.0	8637.5	8.3	8.3	0.59	0.59
1.0-2.0	8551.2	24.5	32.8	1.76	2.35
2.0-3.0	8370.4	40.0	72.9	2.86	5.21
3.0-4.0	8080.4	54.1	126.9	3.87	9.08
4.0-5.0	7674.9	66.0	193.0	4.72	13.80
5.0-6.0	7164.1	75.3	268.3	5.39	19.19
6.0-7.0	6564.1	81.5	349.8	5.83	25.01
7.0-8.0	5905.1	84.5	434.3	6.04	31.06
8.0-9.0	5220.5	84.6	518.9	6.05	37.11
9.0-10.0	4532.7	82.0	600.9	5.87	42.98
10.0-11.0	3867.1	77.3	678.2	5.53	48.51
11.0-12.0	3261.1	71.3	749.5	5.10	53.60
12.0-13.0	2737.0	65.0	814.5	4.65	58.25
13.0-14.0	2294.6	58.7	873.2	4.20	62.45
14.0-15.0	1929.2	53.0	926.2	3.79	66.24
15.0-16.0	1626.5	47.7	973.9	3.41	69.65
16.0-17.0	1375.9	42.9	1016.7	3.06	72.71
17.0-18.0	1169.1	38.6	1055.3	2.76	75.47
18.0-19.0	998.5	34.7	1090.0	2.48	77.96
19.0-20.0	855.6	31.3	1121.3	2.24	80.19
20.0-21.0	735.9	28.3	1149.6	2.02	82.22
21.0-22.0	636.2	25.6	1175.2	1.83	84.04
22.0-23.0	550.1	23.1	1198.2	1.65	85.70
23.0-24.0	477.1	20.9	1219.1	1.49	87.19
24.0-25.0	416.7	19.0	1238.1	1.36	88.54
25.0-26.0	365.1	17.2	1255.3	1.23	89.78
26.0-27.0	320.2	15.7	1271.0	1.12	90.90
27.0-28.0	279.5	14.2	1285.1	1.01	91.91
28.0-29.0	244.0	12.8	1297.9	0.91	92.82
29.0-30.0	215.2	11.6	1309.5	0.83	93.65
30.0-31.0	191.0	10.6	1320.1	0.76	94.41
31.0-32.0	168.9	9.7	1329.8	0.69	95.10
32.0-33.0	147.5	8.7	1338.5	0.62	95.73
33.0-34.0	128.8	7.8	1346.3	0.56	96.28
34.0-35.0	113.4	7.0	1353.3	0.50	96.79
35.0-36.0	99.4	6.3	1359.7	0.45	97.24

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

Zonal Lumen (Continue 1)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
36.0-37.0	86.4	5.6	1365.3	0.40	97.64
37.0-38.0	74.8	5.0	1370.3	0.36	98.00
38.0-39.0	66.0	4.5	1374.8	0.32	98.32
39.0-40.0	57.2	4.0	1378.8	0.29	98.61
40.0-41.0	48.8	3.5	1382.3	0.25	98.86
41.0-42.0	42.5	3.1	1385.3	0.22	99.08
42.0-43.0	35.5	2.6	1388.0	0.19	99.26
43.0-44.0	29.5	2.2	1390.2	0.16	99.42
44.0-45.0	24.9	1.9	1392.1	0.14	99.56
45.0-46.0	20.4	1.6	1393.7	0.11	99.67
46.0-47.0	16.5	1.3	1395.0	0.09	99.77
47.0-48.0	12.3	1.0	1396.0	0.07	99.84
48.0-49.0	8.4	0.7	1396.7	0.05	99.89
49.0-50.0	6.3	0.5	1397.2	0.04	99.93
50.0-51.0	5.3	0.4	1397.7	0.03	99.96
51.0-52.0	4.2	0.4	1398.0	0.03	99.98
52.0-53.0	2.1	0.2	1398.2	0.01	100.00
53.0-54.0	0.3	0.0	1398.3	0.00	100.00
54.0-55.0	0.0	0.0	1398.3	0.00	100.00
55.0-56.0	0.0	0.0	1398.3	0.00	100.00
56.0-57.0	0.0	0.0	1398.3	0.00	100.00
57.0-58.0	0.0	0.0	1398.3	0.00	100.00
58.0-59.0	0.0	0.0	1398.3	0.00	100.00
59.0-60.0	0.0	0.0	1398.3	0.00	100.00
60.0-61.0	0.0	0.0	1398.3	0.00	100.00
61.0-62.0	0.0	0.0	1398.3	0.00	100.00
62.0-63.0	0.0	0.0	1398.3	0.00	100.00
63.0-64.0	0.0	0.0	1398.3	0.00	100.00
64.0-65.0	0.0	0.0	1398.3	0.00	100.00
65.0-66.0	0.0	0.0	1398.3	0.00	100.00
66.0-67.0	0.0	0.0	1398.3	0.00	100.00
67.0-68.0	0.0	0.0	1398.3	0.00	100.00
68.0-69.0	0.0	0.0	1398.3	0.00	100.00
69.0-70.0	0.0	0.0	1398.3	0.00	100.00
70.0-71.0	0.0	0.0	1398.3	0.00	100.00
71.0-72.0	0.0	0.0	1398.3	0.00	100.00

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

Candlepower Table

Unit: cd

G\C	C0.0	C180.0								
G0.0	8658.9	8658.9								
G1.0	8744.6	8487.6								
G2.0	8758.6	8213.8								
G3.0	8706.7	7802.3								
G4.0	8583.1	7229.4								
G5.0	8389.3	6497.7								
G6.0	8104.2	5665.0								
G7.0	7697.0	4790.1								
G8.0	7143.7	3989.6								
G9.0	6454.2	3294.5								
G10.0	5660.8	2721.5								
G11.0	4833.6	2252.5								
G12.0	4080.9	1877.6								
G13.0	3425.1	1564.4								
G14.0	2874.6	1314.4								
G15.0	2416.8	1110.8								
G16.0	2034.8	943.7								
G17.0	1716.1	808.9								
G18.0	1454.9	696.5								
G19.0	1240.0	602.5								
G20.0	1056.0	523.8								
G21.0	905.8	457.8								
G22.0	780.8	400.2								
G23.0	672.7	346.9								
G24.0	584.2	304.7								
G25.0	508.4	269.6								
G26.0	443.8	238.7								
G27.0	386.2	212.1								
G28.0	335.6	184.0								
G29.0	296.3	160.1								
G30.0	261.2	143.2								
G31.0	235.9	123.6								
G32.0	205.0	110.9								
G33.0	176.9	96.9								
G34.0	155.9	85.7								
G35.0	137.6	74.4								
G36.0	120.8	64.6								

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0

Test Device: CHL-6E

Distance: 2.905 m

Humidity:

Inspector:

Candlepower Table (Continue 1)

Unit: cd

G\C	C0.0	C180.0								
G37.0	105.3	54.8								
G38.0	91.3	47.8								
G39.0	82.8	42.1								
G40.0	70.2	33.7								
G41.0	61.8	29.5								
G42.0	56.2	22.5								
G43.0	44.9	18.3								
G44.0	39.3	15.4								
G45.0	33.7	11.2								
G46.0	28.1	8.4								
G47.0	22.5	7.0								
G48.0	18.3	1.4								
G49.0	14.0	0.0								
G50.0	11.2	0.0								
G51.0	9.8	0.0								
G52.0	7.0	0.0								
G53.0	1.4	0.0								
G54.0	0.0	0.0								
G55.0	0.0	0.0								
G56.0	0.0	0.0								
G57.0	0.0	0.0								
G58.0	0.0	0.0								
G59.0	0.0	0.0								
G60.0	0.0	0.0								
G61.0	0.0	0.0								
G62.0	0.0	0.0								
G63.0	0.0	0.0								
G64.0	0.0	0.0								
G65.0	0.0	0.0								
G66.0	0.0	0.0								
G67.0	0.0	0.0								
G68.0	0.0	0.0								
G69.0	0.0	0.0								
G70.0	0.0	0.0								
G71.0	0.0	0.0								
G72.0	0.0	0.0								
G73.0	0.0	0.0								

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

Unit: cd

Inspector: