

Report No.:

Test Time: 2025-09-13 11:38

## Luminaire Property

Luminaire Manufacturer:

Luminaire Description: FLEXI 铝杯款 136D 2025.9.13

Luminous Length (mm): -68

Voltage: 230.6 V

Power: 14.90 W

Luminous Width (mm): -68

Current: 0.105 A

Power Factor: 0.608

## Photometric Results

CIE Class: Direct

Measurement Flux: 1508.3 lm

Downward Ratio: 100%

Horizontal Diffuse Angle(50%): H39.8

Vertical Diffuse Angle(50%): V39.8

Luminaire Efficacy Rating (LER): 101.28

Max. Intensity: 3526.13 cd

S/MH(C0/C180): 0.67

Total Rated Lamp Lumens: 1508.3 lm

Efficiency: 100%

Upward Ratio: 0%

Central Intensity: 3522.62 cd


Pos of Max. Intensity: H0 V1

S/MH(C90/C270): 0.67

Picture Of Luminaire



Luminous Intensity Distribution Curve

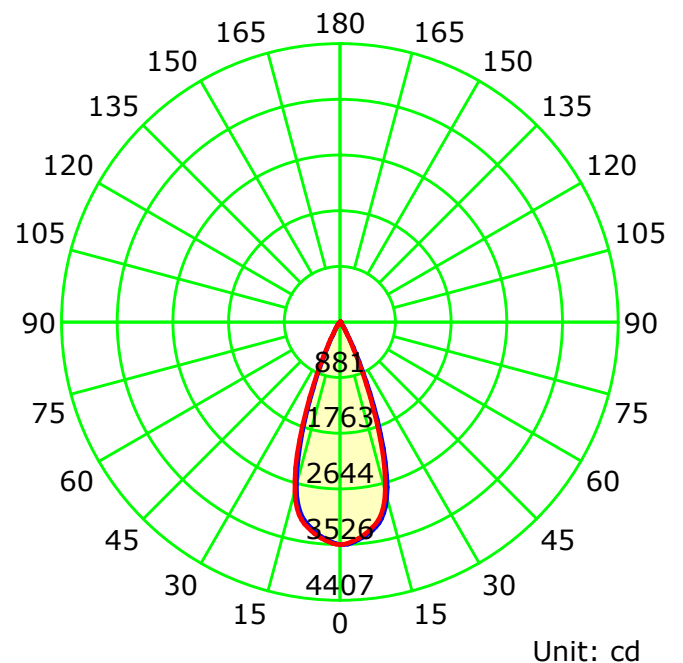

— C0-C180 — C90-C270

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0



Test Device: CHL-6E

Distance: 2.905 m

Humidity:

Inspector:


## Luminous Intensity Distribution Curve

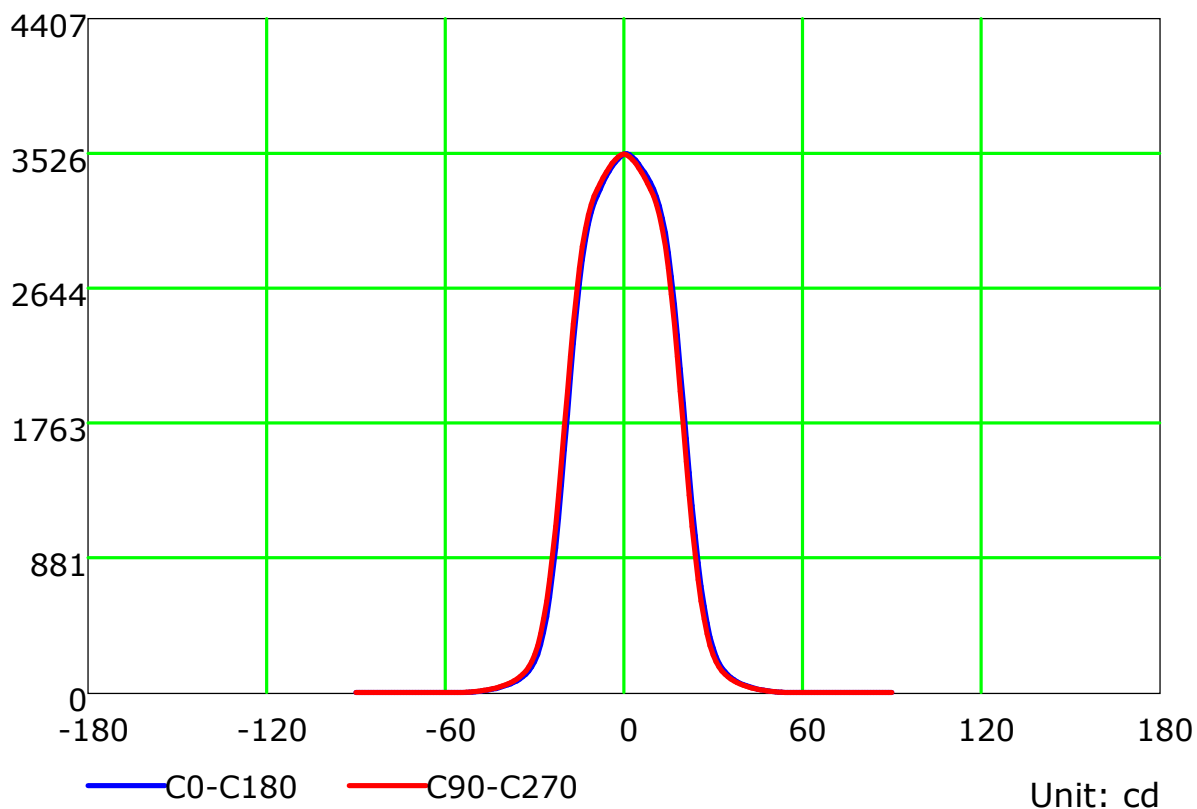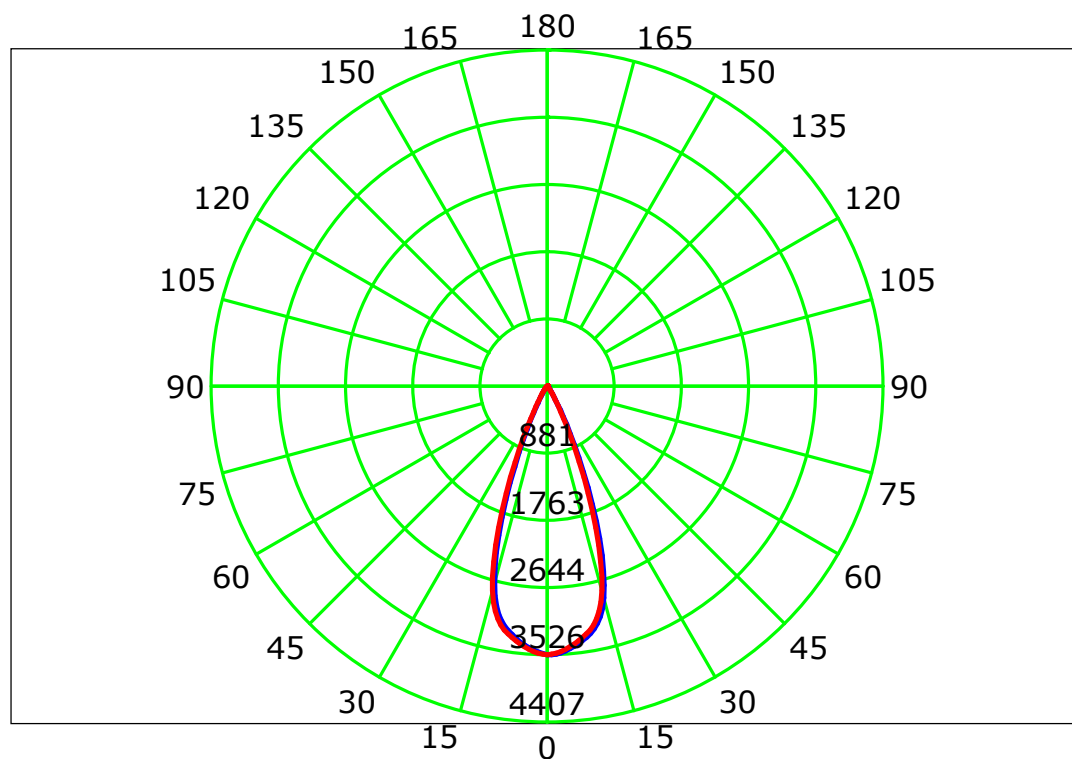

C Plane (°):0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°):0.0-90.0:1.0  
Test Device: CHL-6E  
Distance: 2.905 m  
Humidity:  
Inspector:


## Luminous Intensity Distribution Curve(cd/klm)

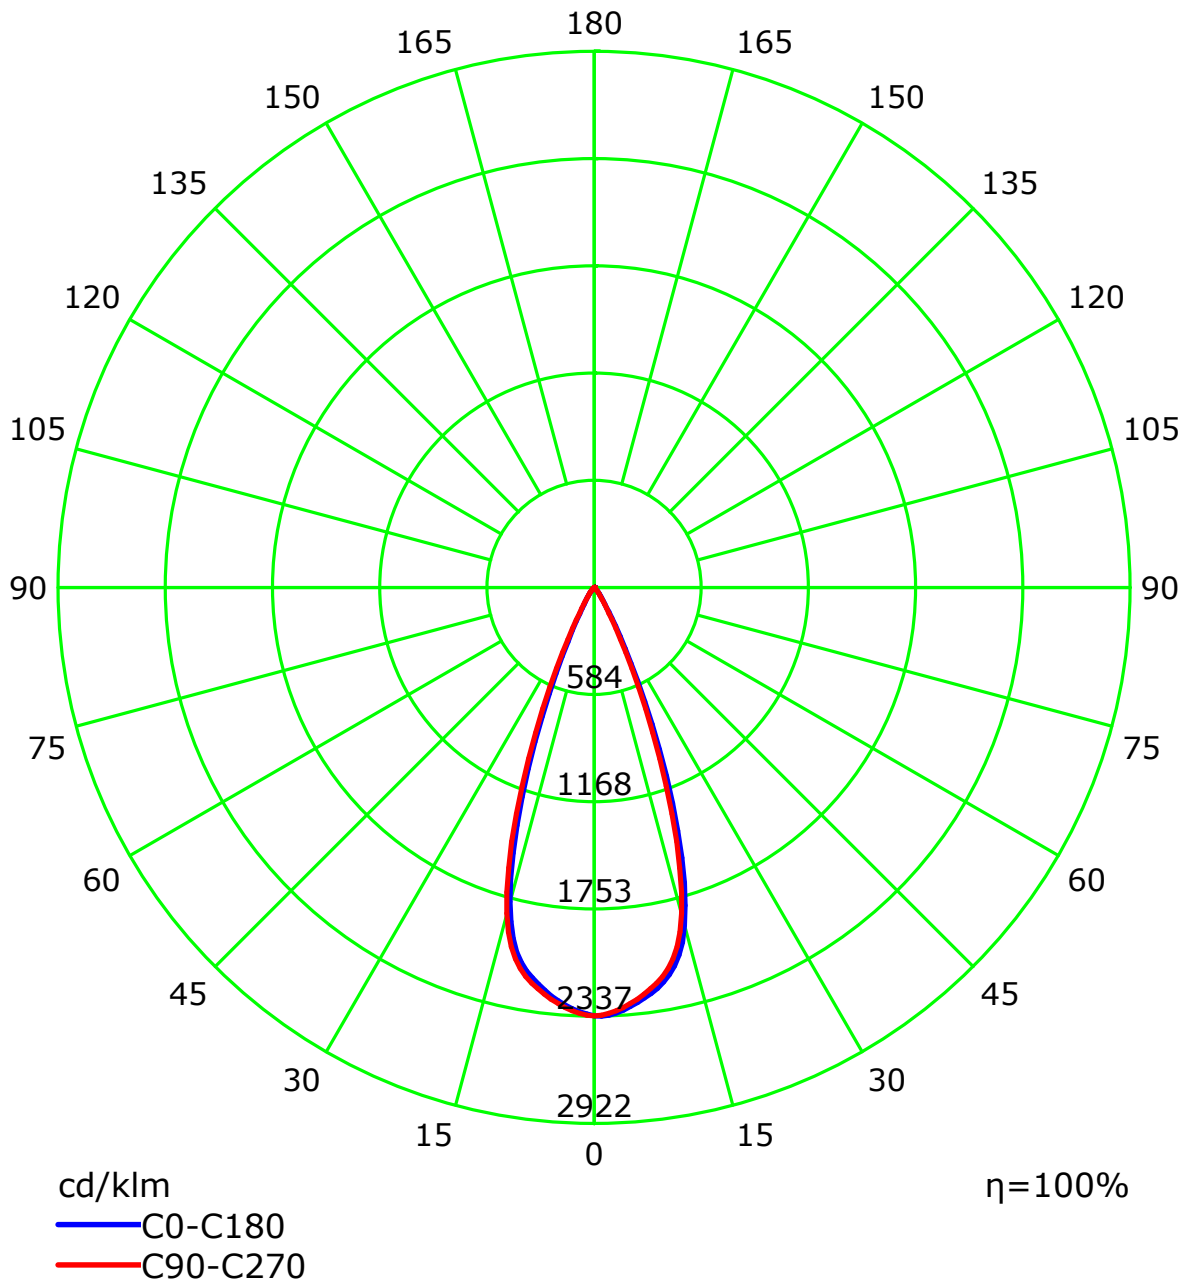

C Plane (°):0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°):0.0-90.0:1.0  
Test Device: CHL-6E  
Distance: 2.905 m  
Humidity:  
Inspector:

## Isocandela (rectangle)

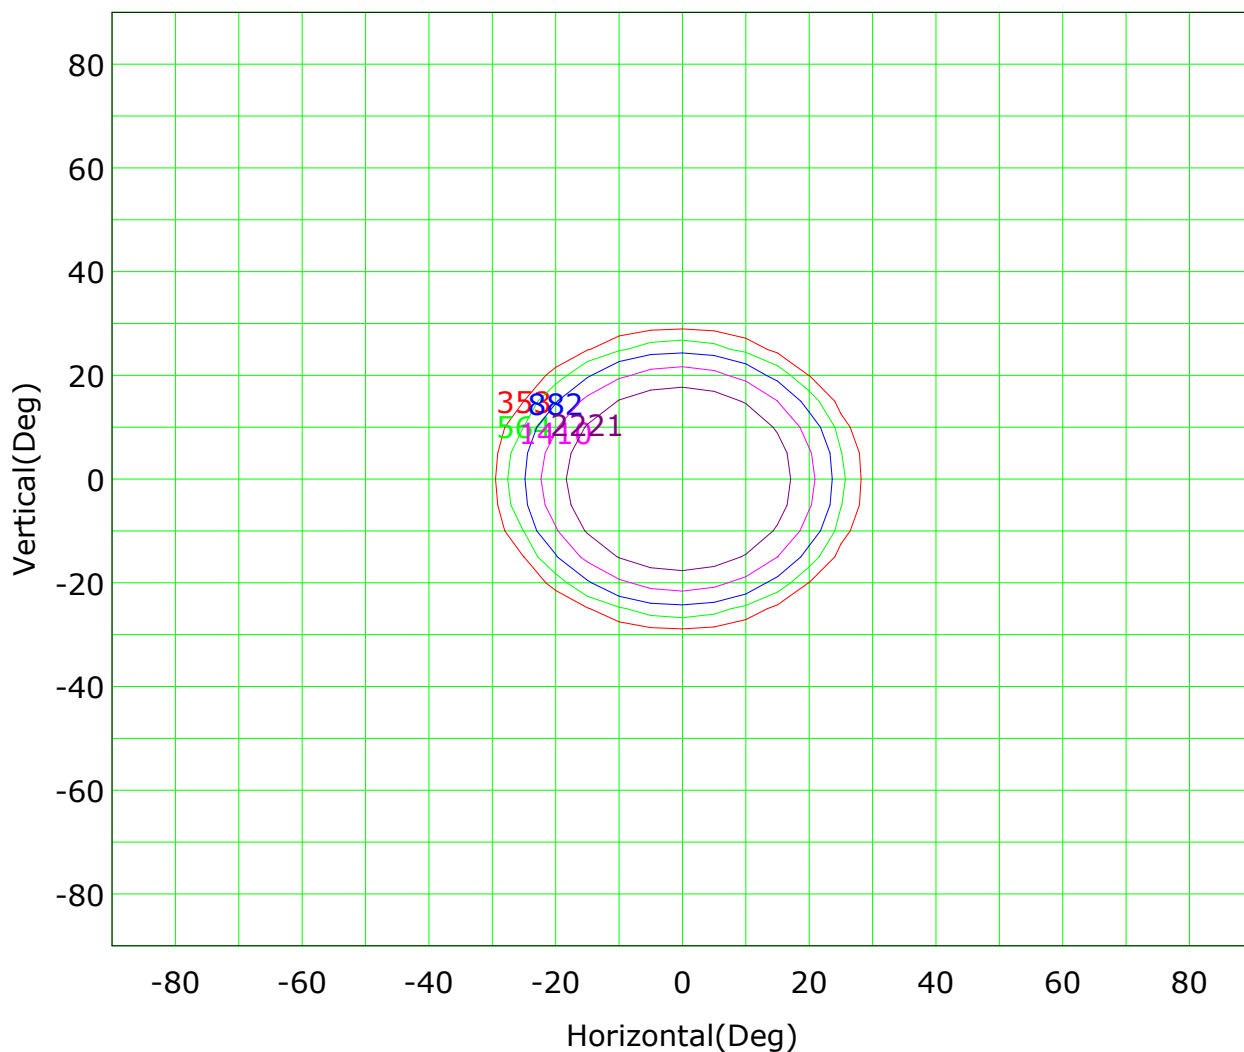

Imax (100%): 3526 cd

( 10%): 353 cd	( 16%): 564 cd
( 25%): 882 cd	( 40%): 1410 cd
( 63%): 2221 cd	(100%): 3526 cd

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0


Test Device: CHL-6E

Distance: 2.905 m

Humidity:

Inspector:

## IsoLux Plot

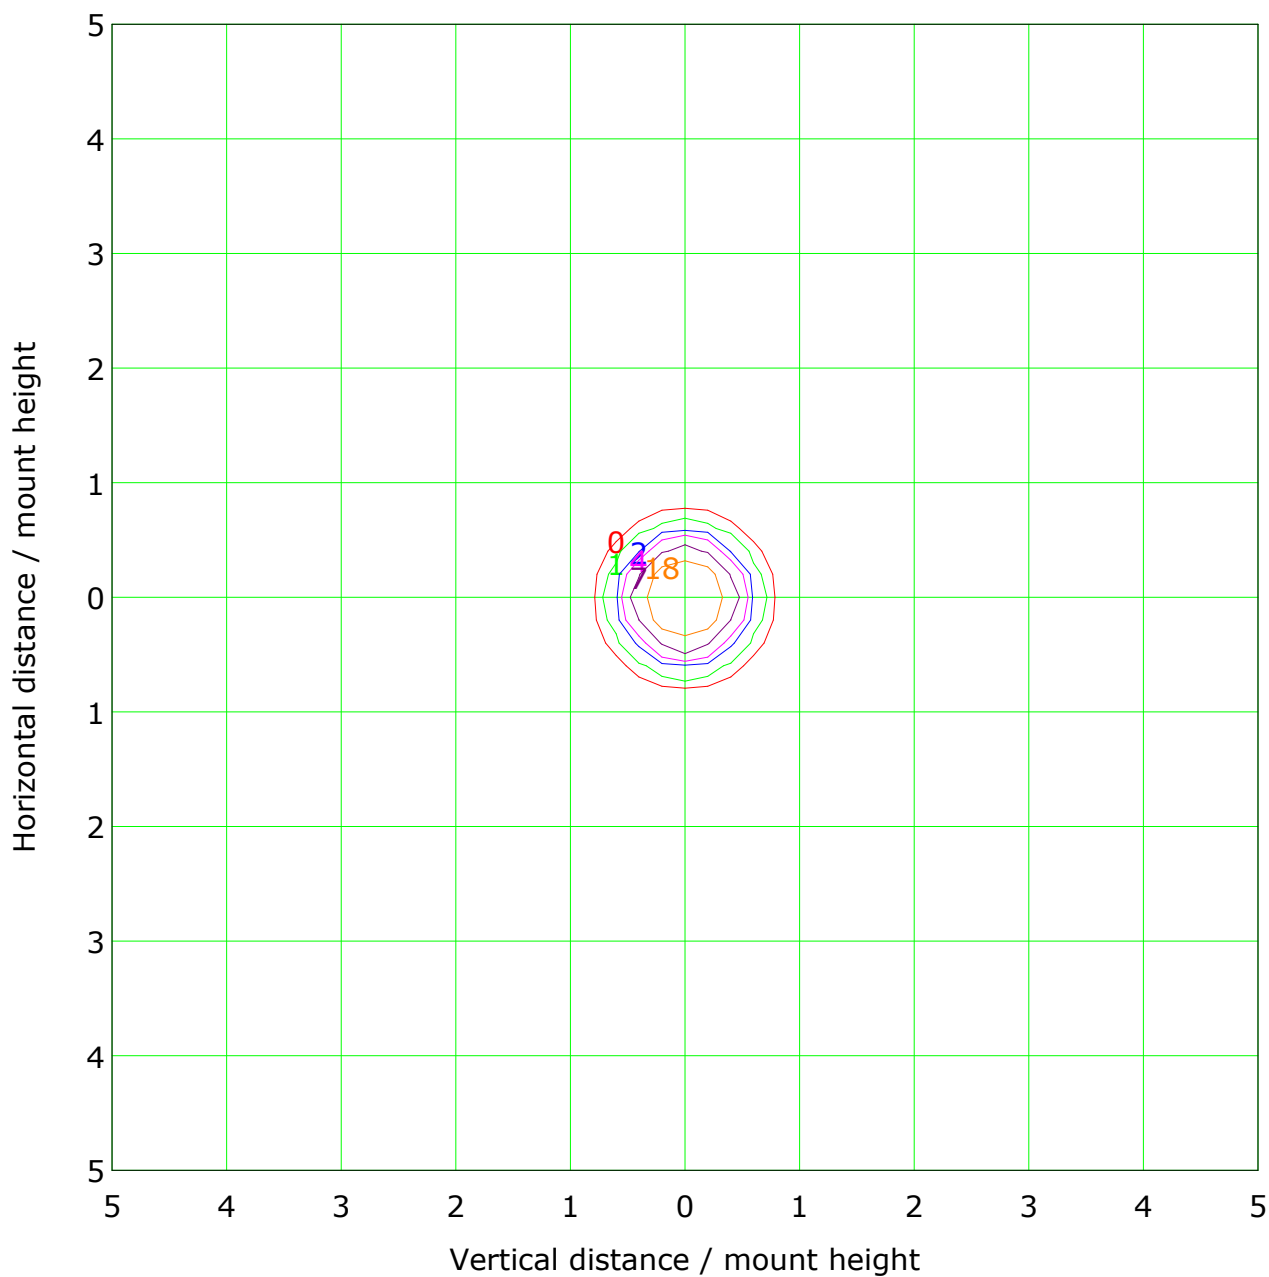


Mounting Height: 10.0m    Max Lux(100%): 35.2 lx

( 1%): 0.4 lx	( 2%): 0.7 lx
( 5%): 1.8 lx	( 10%): 3.5 lx
( 20%): 7.0 lx	( 50%): 17.6 lx
(100%): 35.2 lx	


C Plane (°):0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°):0.0-90.0:1.0  
Test Device: CHL-6E  
Distance: 2.905 m  
Humidity:  
Inspector:

## Illuminance at a Distance

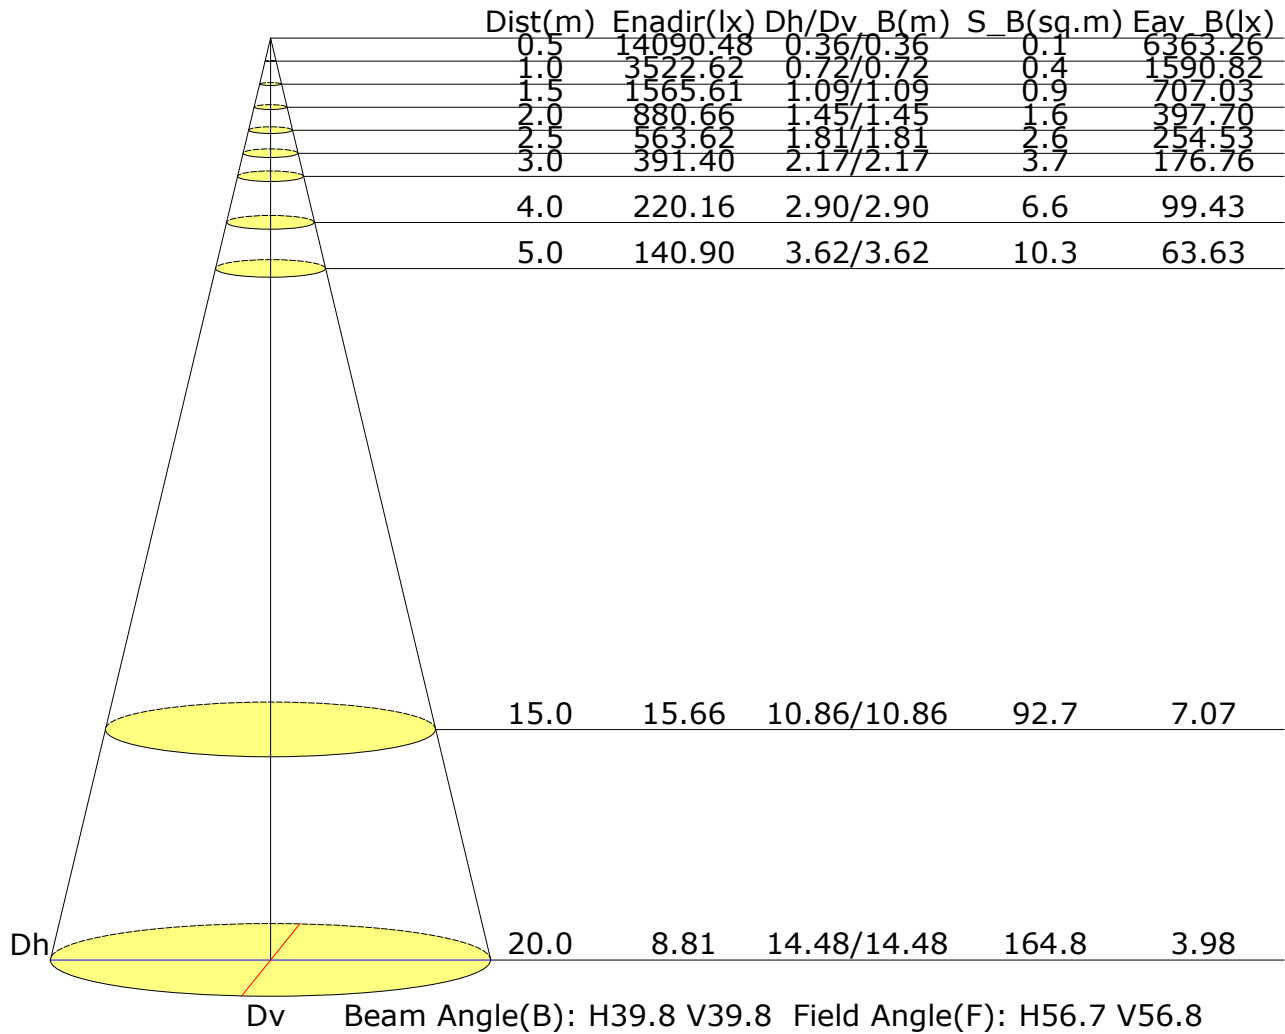

## Vertical IsoLux Plot

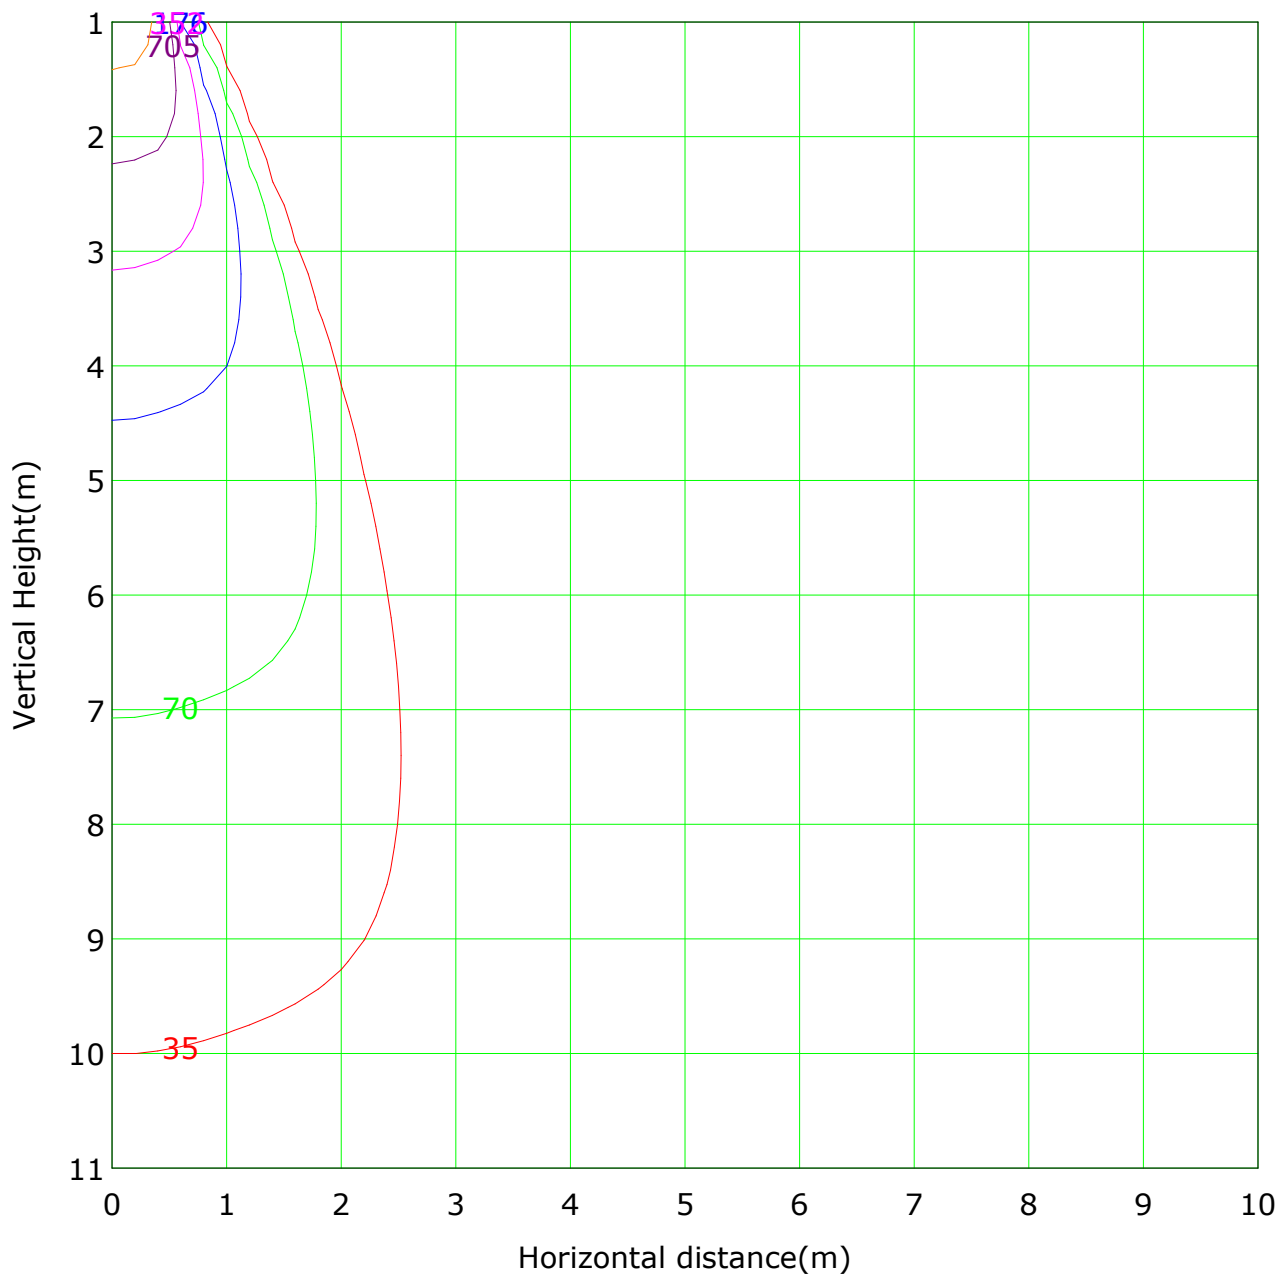

Lowest(m): 1.0m   Highest(m): 11.0m   Max Lux: 3522.6 lx  
— ( 1%): 35.2 lx   — ( 2%): 70.5 lx  
— ( 5%): 176.1 lx   — ( 10%): 352.3 lx  
— ( 20%): 704.5 lx   — ( 50%): 1761.3 lx  
— (100%): 3522.6 lx


C Plane (°): 0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°): 0.0-90.0: 1.0  
Test Device: CHL-6E  
Distance: 2.905 m  
Humidity:  
Inspector:

Gamma Plane (°):0.0-90.0:1.0  
Test Device: CHL-6E  
Distance: 2.905 m  
Humidity:  
Inspector:



## The Average Illuminance Effective Figure

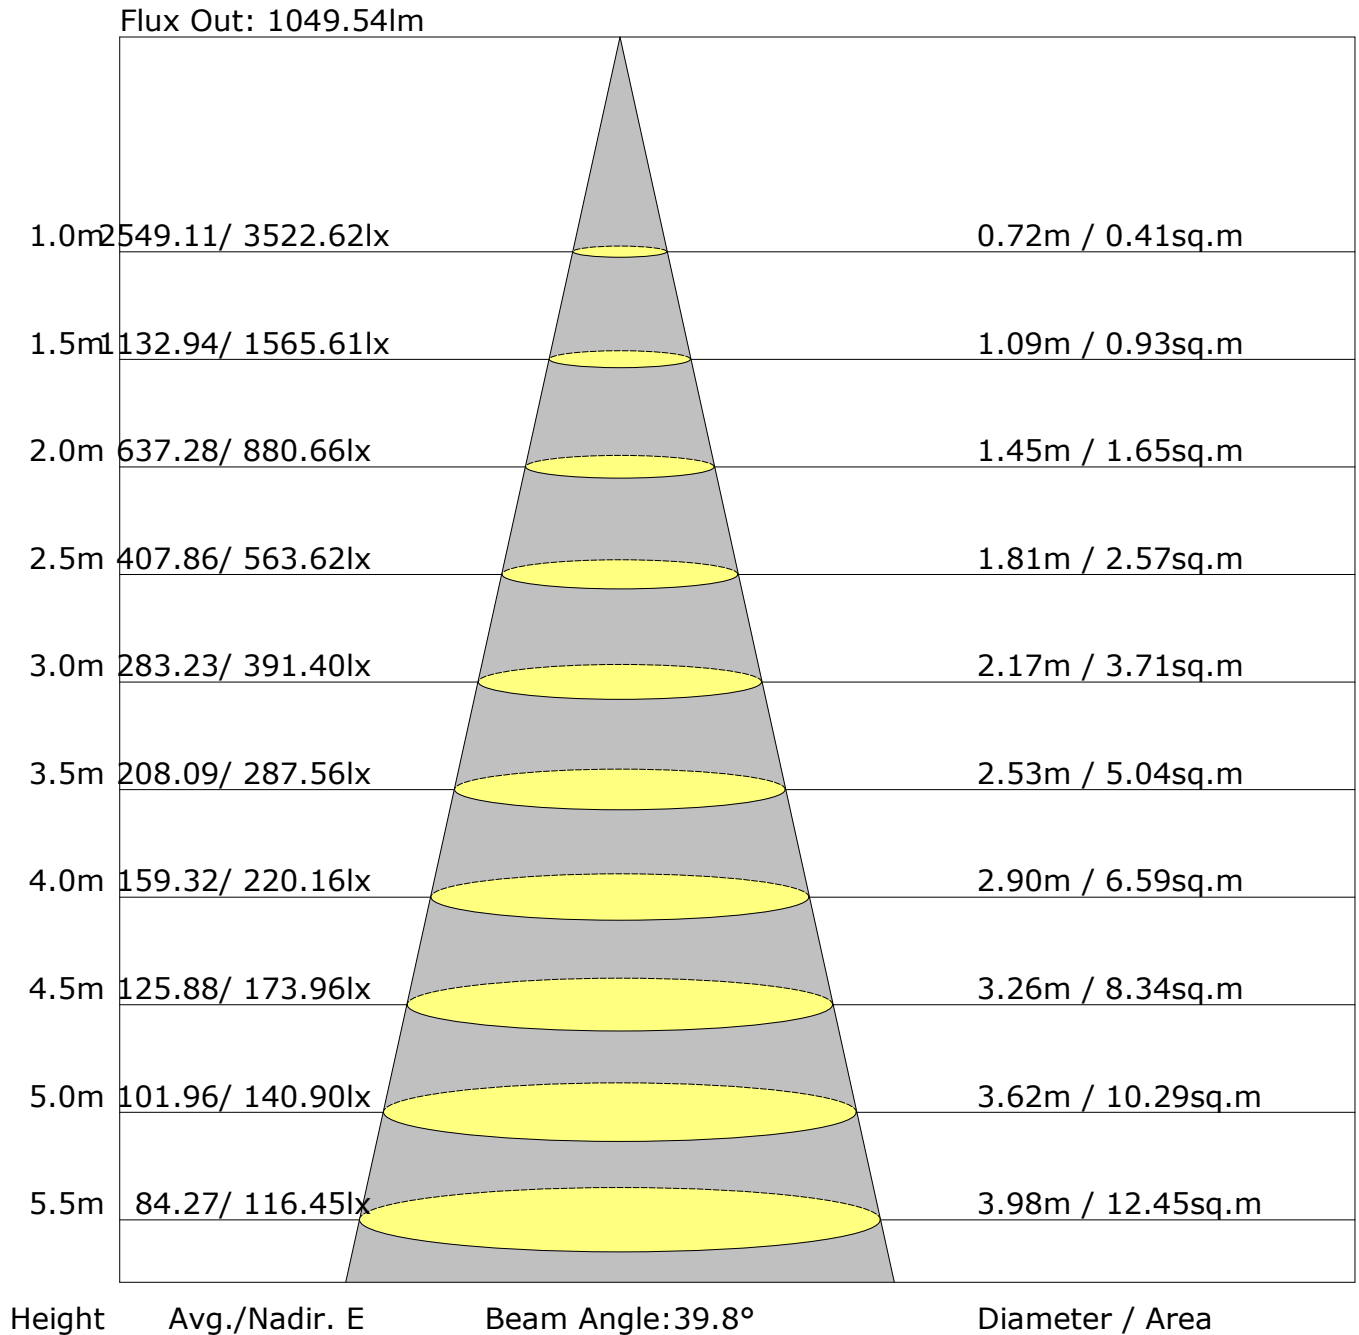

C Plane (°): 0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°): 0.0-90.0: 1.0  
Test Device: CHL-6E  
Distance: 2.905 m  
Humidity:  
Inspector:

## UGR Table

Reflectance:										
Ceiling (cavity)	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
X=2H Y=2H	11.5	12.2	11.7	12.3	12.5	10.9	11.6	11.2	11.8	12.0
3H	11.3	12.0	11.6	12.2	12.4	10.8	11.4	11.1	11.6	11.9
4H	11.3	11.8	11.6	12.1	12.4	10.7	11.3	11.0	11.5	11.8
6H	11.2	11.7	11.5	12.0	12.3	10.6	11.2	11.0	11.5	11.7
8H	11.2	11.7	11.5	12.0	12.3	10.6	11.1	10.9	11.4	11.7
12H	11.1	11.6	11.5	11.9	12.2	10.6	11.1	10.9	11.4	11.7
X=4H Y=2H	11.3	11.8	11.6	12.1	12.4	10.7	11.3	11.0	11.5	11.8
3H	11.1	11.6	11.5	11.9	12.2	10.6	11.1	10.9	11.4	11.7
4H	11.0	11.5	11.4	11.8	12.2	10.5	10.9	10.9	11.3	11.6
6H	10.9	11.3	11.3	11.7	12.1	10.4	10.8	10.8	11.1	11.5
8H	10.9	11.3	11.3	11.6	12.0	10.3	10.7	10.8	11.1	11.5
12H	10.8	11.2	11.3	11.6	12.0	10.3	10.6	10.7	11.0	11.5
X=8H Y=4H	10.9	11.3	11.3	11.6	12.0	10.3	10.7	10.8	11.1	11.5
6H	10.8	11.1	11.3	11.5	12.0	10.2	10.5	10.7	11.0	11.4
8H	10.8	11.0	11.2	11.5	11.9	10.2	10.5	10.7	10.9	11.4
12H	10.7	10.9	11.2	11.4	11.9	10.1	10.4	10.6	10.8	11.3
X=12H Y=4H	10.8	11.2	11.3	11.6	12.0	10.3	10.6	10.7	11.0	11.5
6H	10.8	11.0	11.2	11.5	11.9	10.2	10.5	10.7	10.9	11.4
8H	10.7	10.9	11.2	11.4	11.9	10.1	10.4	10.6	10.8	11.3
Variations with the observer position at spacings:										
S=1.0H	+5.4/-22.2					+5.3/-23.8				
S=1.5H	+8.2/-1.\$					+8.1/-1.\$				
S=2.0H	+10.2/-1.\$					+10.1/-1.\$				

Calculate in accordance with CIE Pub.117. The table is revised with  $1508\text{lm}$  ( $8\log(F/F_0) = 1.4$ ).

C Plane (°):0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°):0.0-90.0:1.0  
Test Device: CHL-6E  
Distance: 2.905 m  
Humidity:  
Inspector:

**FLUX DISTRIBUTION TABLE BASED ON THE IESNA LUMINAIRE CLASSIFICATION SYSTEM**

	ZONE	LUMENS	% LAMP LUMENS
	FORWARD LIGHT	778	51.6
	FL ( 0°-30°)	729	48.4
	FM (30°-60°)	48	3.2
	FH (60°-80°)	0	0.0
	FVH (80°-90°)	0	0.0
	BACK LIGHT	731	48.4
	BL ( 0°-30°)	689	45.7
	BM (30°-60°)	42	2.8
	BH (60°-80°)	0	0.0
	BVH (80°-90°)	0	0.0
	UP LIGHT	0	0.0
	UL (90°-100°)	0	0.0
	UH (100°-180°)	0	0.0
	TRAPPED LIGHT	NA	NA

BUG(Backlight,Uplight,Glare) Rating Base On TM-15-07	
Asymmetrical Luminaire Types (Type I,II,III,IV)	B2 U0 G0
Quadrilateral Symmetrical Luminaire Types (Type V,Area Light)	B2 U0 G0

C Plane (°):0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°):0.0-90.0:1.0  
Test Device: CHL-6E  
Distance: 2.905 m  
Humidity:  
Inspector:

## Zonal Lumen

Gamma [°]	I <sub>mean</sub> [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
0.0-1.0	3519.8	3.4	3.4	0.22	0.22
1.0-2.0	3510.5	10.1	13.4	0.67	0.89
2.0-3.0	3494.7	16.7	30.2	1.11	2.00
3.0-4.0	3473.6	23.3	53.4	1.54	3.54
4.0-5.0	3447.8	29.7	83.1	1.97	5.51
5.0-6.0	3418.7	35.9	119.0	2.38	7.89
6.0-7.0	3386.4	42.0	161.1	2.79	10.68
7.0-8.0	3350.2	48.0	209.0	3.18	13.86
8.0-9.0	3312.2	53.7	262.7	3.56	17.42
9.0-10.0	3270.7	59.2	321.9	3.92	21.34
10.0-11.0	3220.5	64.4	386.2	4.27	25.61
11.0-12.0	3157.7	69.0	455.3	4.58	30.19
12.0-13.0	3077.5	73.0	528.3	4.84	35.03
13.0-14.0	2975.4	76.2	604.5	5.05	40.08
14.0-15.0	2847.1	78.2	682.7	5.18	45.26
15.0-16.0	2691.0	78.9	761.5	5.23	50.49
16.0-17.0	2508.7	78.1	839.7	5.18	55.67
17.0-18.0	2304.5	76.0	915.7	5.04	60.71
18.0-19.0	2083.6	72.5	988.2	4.81	65.52
19.0-20.0	1854.0	67.9	1056.0	4.50	70.02
20.0-21.0	1624.3	62.4	1118.4	4.14	74.15
21.0-22.0	1400.1	56.3	1174.7	3.73	77.88
22.0-23.0	1187.7	49.8	1224.5	3.30	81.19
23.0-24.0	992.8	43.4	1267.9	2.88	84.06
24.0-25.0	818.9	37.2	1305.2	2.47	86.53
25.0-26.0	667.1	31.5	1336.7	2.09	88.62
26.0-27.0	538.3	26.3	1363.0	1.75	90.37
27.0-28.0	432.0	21.9	1384.9	1.45	91.82
28.0-29.0	345.5	18.1	1403.0	1.20	93.02
29.0-30.0	276.8	14.9	1417.9	0.99	94.01
30.0-31.0	224.3	12.5	1430.4	0.83	94.84
31.0-32.0	184.7	10.6	1441.0	0.70	95.54
32.0-33.0	154.5	9.1	1450.1	0.60	96.14
33.0-34.0	131.1	7.9	1458.0	0.53	96.67
34.0-35.0	112.0	7.0	1465.0	0.46	97.13
35.0-36.0	95.8	6.1	1471.1	0.40	97.53

C Plane (°):0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°):0.0-90.0:1.0  
Test Device: CHL-6E  
Distance: 2.905 m  
Humidity:  
Inspector:

## Zonal Lumen (Continue 1)

Gamma [°]	I <sub>mean</sub> [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
36.0-37.0	82.4	5.4	1476.4	0.36	97.89
37.0-38.0	71.0	4.7	1481.2	0.31	98.20
38.0-39.0	61.2	4.2	1485.4	0.28	98.48
39.0-40.0	52.9	3.7	1489.0	0.24	98.73
40.0-41.0	45.7	3.3	1492.3	0.22	98.94
41.0-42.0	39.2	2.8	1495.1	0.19	99.13
42.0-43.0	33.2	2.5	1497.6	0.16	99.29
43.0-44.0	28.0	2.1	1499.7	0.14	99.43
44.0-45.0	23.5	1.8	1501.5	0.12	99.55
45.0-46.0	19.6	1.5	1503.1	0.10	99.65
46.0-47.0	16.3	1.3	1504.4	0.09	99.74
47.0-48.0	13.3	1.1	1505.4	0.07	99.81
48.0-49.0	10.4	0.9	1506.3	0.06	99.87
49.0-50.0	7.7	0.6	1506.9	0.04	99.91
50.0-51.0	5.6	0.5	1507.4	0.03	99.94
51.0-52.0	3.9	0.3	1507.7	0.02	99.96
52.0-53.0	2.6	0.2	1508.0	0.02	99.98
53.0-54.0	1.6	0.1	1508.1	0.01	99.99
54.0-55.0	0.9	0.1	1508.2	0.01	99.99
55.0-56.0	0.5	0.0	1508.2	0.00	100.00
56.0-57.0	0.2	0.0	1508.2	0.00	100.00
57.0-58.0	0.2	0.0	1508.3	0.00	100.00
58.0-59.0	0.1	0.0	1508.3	0.00	100.00
59.0-60.0	0.0	0.0	1508.3	0.00	100.00
60.0-61.0	0.0	0.0	1508.3	0.00	100.00
61.0-62.0	0.0	0.0	1508.3	0.00	100.00
62.0-63.0	0.0	0.0	1508.3	0.00	100.00
63.0-64.0	0.0	0.0	1508.3	0.00	100.00
64.0-65.0	0.0	0.0	1508.3	0.00	100.00
65.0-66.0	0.0	0.0	1508.3	0.00	100.00
66.0-67.0	0.0	0.0	1508.3	0.00	100.00
67.0-68.0	0.0	0.0	1508.3	0.00	100.00
68.0-69.0	0.0	0.0	1508.3	0.00	100.00
69.0-70.0	0.0	0.0	1508.3	0.00	100.00
70.0-71.0	0.0	0.0	1508.3	0.00	100.00
71.0-72.0	0.0	0.0	1508.3	0.00	100.00

C Plane (°):0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°):0.0-90.0:1.0  
Test Device: CHL-6E  
Distance: 2.905 m  
Humidity:  
Inspector:

Gamma Plane (°):0.0-90.0:1.0  
Test Device: CHL-6E  
Distance: 2.905 m  
Humidity:  
Inspector:

## Candlepower Table

Unit: cd

G\C	C0.0	C180.0								
G0.0	3522.6	3522.6								
G1.0	3526.1	3507.8								
G2.0	3518.6	3489.5								
G3.0	3502.8	3467.8								
G4.0	3482.4	3441.4								
G5.0	3457.2	3410.2								
G6.0	3429.4	3378.2								
G7.0	3400.7	3337.3								
G8.0	3369.8	3293.0								
G9.0	3335.6	3250.3								
G10.0	3293.7	3203.2								
G11.0	3243.1	3142.1								
G12.0	3181.3	3064.2								
G13.0	3102.9	2961.4								
G14.0	3006.4	2830.7								
G15.0	2876.4	2675.0								
G16.0	2720.5	2492.1								
G17.0	2538.7	2283.4								
G18.0	2337.4	2058.4								
G19.0	2117.3	1821.2								
G20.0	1890.2	1587.4								
G21.0	1660.6	1358.9								
G22.0	1438.6	1142.3								
G23.0	1223.3	946.6								
G24.0	1026.6	774.8								
G25.0	849.7	624.7								
G26.0	696.2	498.0								
G27.0	564.2	395.1								
G28.0	454.5	314.1								
G29.0	363.7	249.6								
G30.0	291.4	202.2								
G31.0	235.8	167.8								
G32.0	193.6	141.5								
G33.0	161.4	121.4								
G34.0	137.1	104.5								
G35.0	116.6	89.8								
G36.0	99.6	77.3								

C Plane (°):0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°):0.0-90.0:1.0  
Test Device: CHL-6E  
Distance: 2.905 m  
Humidity:  
Inspector:

## Candlepower Table (Continue 1)

Unit: cd

G\C	C0.0	C180.0								
G37.0	85.4	67.1								
G38.0	73.3	58.2								
G39.0	62.8	50.6								
G40.0	54.3	44.0								
G41.0	46.4	38.0								
G42.0	40.0	32.3								
G43.0	33.7	27.0								
G44.0	28.0	23.2								
G45.0	22.9	19.7								
G46.0	19.4	16.2								
G47.0	16.5	13.0								
G48.0	13.4	10.2								
G49.0	10.2	7.6								
G50.0	7.8	5.3								
G51.0	5.6	3.6								
G52.0	4.1	2.2								
G53.0	3.1	1.1								
G54.0	1.8	0.4								
G55.0	1.1	0.3								
G56.0	0.6	0.0								
G57.0	0.4	0.0								
G58.0	0.3	0.0								
G59.0	0.1	0.0								
G60.0	0.0	0.0								
G61.0	0.0	0.0								
G62.0	0.0	0.0								
G63.0	0.0	0.0								
G64.0	0.0	0.0								
G65.0	0.0	0.0								
G66.0	0.0	0.0								
G67.0	0.0	0.0								
G68.0	0.0	0.0								
G69.0	0.0	0.0								
G70.0	0.0	0.0								
G71.0	0.0	0.0								
G72.0	0.0	0.0								
G73.0	0.0	0.0								

C Plane (°):0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°):0.0-90.0:1.0  
Test Device: CHL-6E  
Distance: 2.905 m  
Humidity:  
Inspector:



Unit: cd

Inspector: